

Specifications

Main Mix Noise

(20 Hz–20 kHz bandwidth, 1/4" Main out, channels 1–6 Trim @ unity gain, channel EQs flat, all channels assigned to Main Mix, channels 1, 3 and 5 Pan left, 2, 4 and 6 Pan right.)

Main Mix fader down, channel faders down: –101 dBu

Main Mix @ unity, channel faders down: –91 dBu

(95 dB Signal to Noise Ratio, ref +4 dBu)

Main Mix fader @ unity, channel faders @ unity: –86 dBu

Total Harmonic Distortion (THD)

(1 kHz @ +14 dBu, 20 Hz–20 kHz bandwidth)

Mic pre @ insert: 0.0007%

Attenuation (Crosstalk)

(1 kHz relative to 0 dBu, 20 Hz–20 kHz bandwidth, Line in, 1/4" Main Out, Trim @ unity.)

Main Mix fader down: –100 dBu

Channel Alt / Mute switch engaged: –90 dBu

Channel fader down: –90 dBu

Frequency Response

(Mic input to any output.)

20 Hz to 60 kHz: +0 dB/–1 dB

20 Hz to 100 kHz: +0 dB/–3 dB

Equivalent Input Noise (EIN)


(Mic in to Insert Send out, max gain.)

150 ohm termination: –129.5 dBu, 20 Hz–20 kHz

Common Mode Rejection Ratio (CMRR)

(Mic in to Insert Send out, max gain.)

1 kHz: better than –70 dB

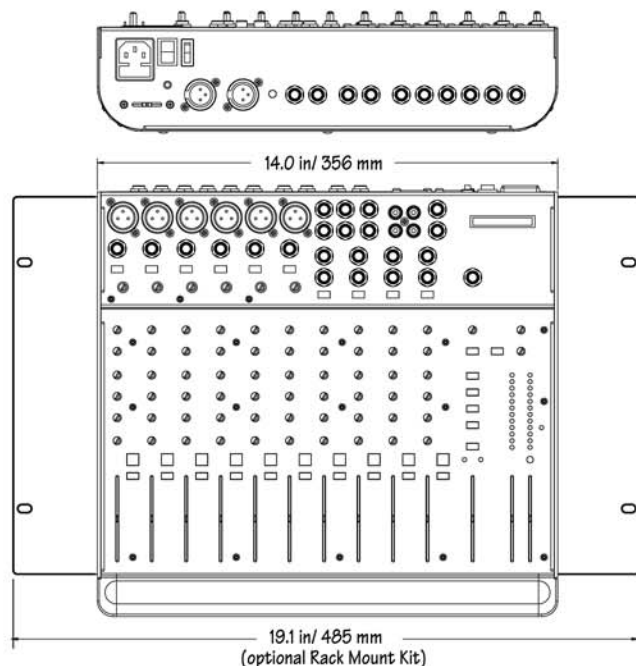

Maximum Levels

Mic in:	+22 dBu
Tape in:	+16 dBu
All other inputs:	+22 dBu
Main Mix XLR out:	+28 dBu
All other outputs:	+22 dBu

Impedances

Mic in:	2.5 kilohms
Channel Insert return:	2.5 kilohms
All other inputs:	10 kilohms or greater
Tape out:	1.1 kilohms
All other outputs:	120 ohms

EQ

High Shelving	±15 dB @ 12 kHz
Mid Peaking	±15 dB @ 2.5 kHz
Low Shelving	±15 dB @ 80 Hz

Power Consumption

120 VAC, 50/60 Hz, 25 watts

Fuse Rating

100-120V:	500 mA slo blo, 5 x 20 mm
220-240V:	250 mA slo blo, 5 x 20 mm

Weight

9.5 lb (4.5 kg)

Dimensions (H x W x D)

12.9" x 14.0" x 3.2" (329 mm x 356 mm x 81 mm)

LOUD Technologies Inc. is always striving to improve our products by incorporating new and improved materials, components, and manufacturing methods. Therefore, we reserve the right to change these specifications at any time without notice.

"Mackie," and the "Running Man" are registered trademarks of LOUD Technologies Inc. All other brand names mentioned are trademarks or registered trademarks of their respective holders, and are hereby acknowledged.

©2006 LOUD Technologies Inc. All Rights Reserved.

