

PITTSBURGH MODULAR
SYSTEM 90 SYNTHESIZER

MANUAL AND
PATCH GUIDE

Important Instructions – PLEASE READ



Read Instructions:

Please read the System 90 Synthesizer manual completely before use and retain for future reference.

IMPORTANT Ribbon Cable Power Information:

The System 90 combines a set of individual modules to create a complete instrument. The individual modules can be rearranged, removed, and replaced with any compatible eurorack modules from Pittsburgh Modular and other manufacturers.

The System 90 uses a standard eurorack power rail to connect the modules to the internal bipolar +/-12v power supply. Please pay very close attention to the orientation of the ribbon cable when adding and removing modules. The stripe on the ribbon cable marks -12v. This stripe needs to line up with the -12v pins on the power rail and the -12v pins on the module. **Failure to match up the pins correctly can result in damage to one or all the modules in the System 90.** On the power rail, the -12v pins are clearly labeled. On the individual modules, the positive and negative sides of the pin connectors are labeled next to the power header on either the top or bottom of the PCB.

Do **NOT** remove individual modules from the Foundation while synthesizer is plugged in.

Do **NOT** unplug ribbon cables from the Foundation or individual modules while the Foundation is plugged in.

Table of Contents

Important Instructions	2
Table of Contents	3
Case and Power Specifications	4
System 90 Package Contents.....	4
An Introduction to Modular Synthesis.....	5
Modular Signal Paths	6
Individual Modules	7-17
Patching a Modular Synthesizer	18
Patch Guides	19-35
1 Year Limited Warranty.....	36
Service and Other Information	37

Case and Power Specifications



System 90 Package Contents

1x System 90 Modular Synthesizer
1x Pittsburgh Modular Patch Cable Kit
1x External Power Adapter

Case and Power Supply Info

External Dimensions: 19.5" x 5.5" x 3"

Internal Specifications:

104hp Eurorack Case

Sliding Nut Mounting System with 18 Nuts Per Rail

External Power Adapter:

Connection: 2.1mm Barrel Type

Output: 12V-15V AC / 2000mA

An Introduction to Modular Synthesis



The System 90 Synthesizer is a complete, standalone, fully modular synthesizer that bridges the gap between classic east coast synthesis and west coast experimentation. The System 90 Synthesizer contains all the components necessary to create massive monosynth leads and basses, complex evolving soundscapes and textures, along with everything in between. Innovative oscillators matched with a stunning filter pushes the Synthesizer System 90 to a league of its own.

Because each module performs a single function, without patch cables the System 90 will not produce sound. A synthesizer voice must first be patched up using cables to wire modules together. The System 90 allows the signal flow to be rewired with every patch. The voice can be as simple as listening to the triangle output of an oscillator or as complex as a self running patch using all the modules.

Modular Signal Paths

The System 90 signal path is divided into two types of signals: audio signals and control voltages.


The audio signal is the sound that is produced. The audio signal path starts at a sound source such as a DNA Symbiotic Waves oscillator, Waveforms oscillator, LFO running at audio rate, or a self oscillating LPG module. The audio signal is then patched through other modules used to shape the sound such as mixers, filters, and amplifiers.

Control voltages (CV) manipulate the audio signal in several different ways.

Gates are represented by a high or low control voltage. A gate can be generated using a square or pulse wave from an oscillator or LFO, or by using the GATE output from the Midi2 module. A gate can be shaped using an envelope generator to control the attack, decay, sustain, and release of the gate. The modified gate signal can then be sent to any CV input on the Foundation.

A second use for control voltages is as a modulation source. For example, a control voltage from the CV output of the Midi2 module patched into the 1V/O input on the Waveforms oscillator module controls the frequency of the oscillator based on the midi note received. The LFO2 module provides two separate low frequency oscillators that make perfect control voltage modulation sources. Audio signals also make a great control voltage source for oscillator FM (frequency modulation).

As always, experimentation is essential to getting the most out of the System 90.

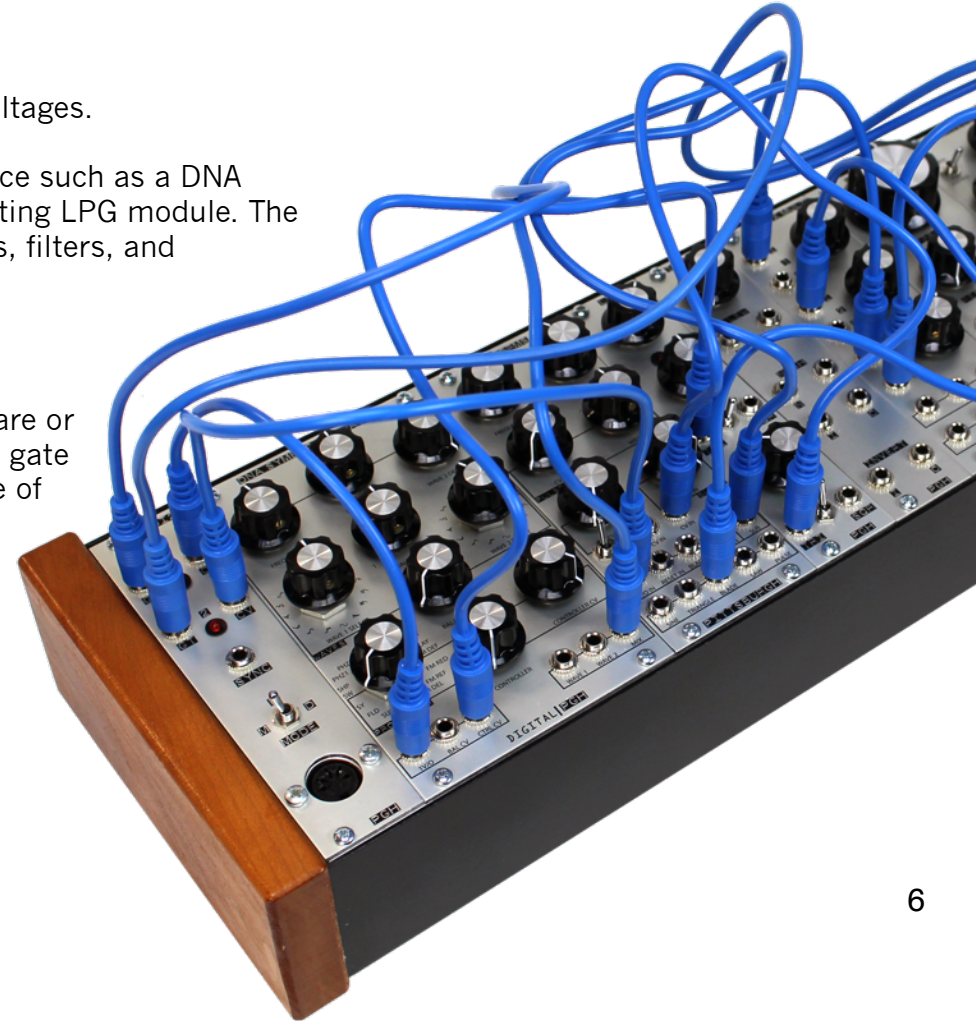

Individual Modules



The System 90 is a collection of 11 modules that will allow you to create complex analog sounds. The modular nature of the System 90 allows for deep experimentation and a virtually unlimited sound palate. The following pages describe the functionality and controls of each module.

Midi2 Module

Description

The Midi2 converts standard midi note messages into the analog control voltages used by modular synthesizers. This allows a modular synthesizer to be controlled by a midi keyboard, sequencer, or DAW. The Midi2 module has 3 distinct modes of operation set using the switch on the front panel.

1. Monophonic - (M) Gate2 and CV2 outputs mirror the outputs of Gate1 and CV1. Monophonic mode works great when using a modular as a single voice synthesizer.
2. Duophonic - (P) The Midi2 module uses the two sets of Gate and CV outputs to allow two notes to be played simultaneously. The first midi note is sent to the Gate1 and CV1 outputs and the second is sent to the Gate2 and CV2 outputs. Duophonic mode is perfect when working with a two voice modular synthesizer.
3. Dual Monophonic - (D) Gate 2 and CV2 outputs are controlled by a different midi channel than the Gate 1 and CV 1 Outputs. Dual Monophonic mode allows a modular to be controlled by two separate sets of midi data. This mode works well when using a modular as two single voice synthesizers.

Controls

GT1 Output – Note on = Gate high (+5v), Note off = gate low (0v).

CV1 Output – 1 volt per octave voltage derived from note played on keyboard.

GT2 Output – Note on = Gate high (+5v), Note off = gate low (0v).

CV2 Output – 1 volt per octave voltage derived from note played on keyboard.

Sync Output – Outputs gate based on beat 1 of the incoming midi clock.

Midi Input – Input jack for a standard 5-pin midi cable.



DNA Symbiotic Waves Module

Description

A powerful 9-bit digital oscillator and waveform processor. A unique dual oscillator system paired with a comprehensive waveform processing and modulation section. Detailed info available at pittsburghmodular.com/dna-symbiotic-waves.

Controls

Frequency Control Knob – Adjusts the center frequency.

Fine Tune Control knob – Fine tune frequency adjustment.

Wave 2 Detune Knob – Adjusts the pitch of wave 2 relative to wave 1. Range is 0 to +1 octave.

Wave 1 Select Knob – 16 step waveform selector.

Wave 2 Select Knob – 16 step waveform selector.

Balance Control Knob – Adjust the processor output balance between wave 1 and wave 2.

Balance CV Attenuator Knob – Balance CV input attenuator.

Processor Selector Knob – 16 step processing mode selector.

Processor Controller Knob – Processor mode specific function controller knob.

Processor Controller CV Attenuator Knob – Processor controller CV input attenuator.

1 V/O Input – One volt per octave CV input.

Balance CV Input – Balance CV Input

Control CV Input – Processor control CV input.

Wave 1 Output – Preprocessor waveform output of Wave 1.

Wave 2 Output – Preprocessor waveform output of Wave 2.

Processor Mix Output – Post processor mix output.



Waveforms Module

Description

A wide range, multiple waveform generator. The Waveforms oscillator has a frequency range starting as low as 7 seconds per cycle, allowing it to double as a voltage controlled LFO.

Controls

Frequency Control – Course frequency setting.

Fine Tune Control - Fine tune frequency setting.

Pulse Width CV Attenuator - Controls the amount of CV used to adjust the pulse width of the pulse wave.

Pulse Width Control - Manually controls the pulse width of the pulse wave.

FM CV Attenuator Control and Input - Frequency modulation CV input and attenuation control.

FM Type - Switches FM response type between linear and exponential.

Blade CV Attenuator Control and Input - Blade wave Y-axis modulation CV input and attenuation control.

1v/o Input - CV input used to track the oscillator at 1 volt per octave.

Reset Input - CV Input used to hard reset the Oscillator on the falling edge of the incoming waveform.

Blade Input - CV or audio rate input used to modulate the blade wave creating a ring mod type effect.

PWM Input - Pulse width modulation CV input. Affects the pulse width of the pulse wave.

Sub Output - Square wave sub oscillator output. Sub Oscillator is 1 lower than the oscillator core.

Sine Output – Sine wave output.

Triangle Output – Triangle wave output.

Blade Output – Blade wave output.

Saw Output – Saw wave output.

Pulse Output – Pulse wave output.



LFO2 Module

Description

A dual low frequency oscillator module. It uses two different types of low frequency oscillator circuits to provide a variety of CV and audio rate modulation options. The top LFO utilizes rate and symmetry controls to generate shifting waveforms. Adjusting the symmetry control varies the shape of the TRI output waveform from a saw tooth to triangle to ramp wave. The symmetry control also adjusts the pulse width of the SQR wave output. The bottom LFO is a simple triangle based low frequency oscillator with rate control over the triangle and square outputs.

LFO 1 Controls (top)

Rate Control - Coarse frequency setting.

Symmetry Control - Modify the shape of the waveforms.

TRI Output - Saw / Triangle / Ramp wave output.

Range Switch - Switches the frequency range.

SQR Output - Square / Pulse wave output.

LFO 2 Controls (bottom)

Rate Control - Coarse frequency setting.

TRI Output - Triangle wave output.

Range Switch - Switches the frequency range of LFO 2.

SQR Output - Square wave output.



Toolbox Module

Description

Multi-purpose slew, noise, sample & hold, and voltage inverter module. The slew control smoothly shifts from variable voltages creating a portamento or glide effect. This function works well patched between the CV output of the Midi2 and the 1v/o input of the Waveforms oscillator. The Sample & Hold samples the voltage patched to the input and outputs that voltage until a new sample voltage is taken. A sample is taken when the Hold input receives a positive gate or trigger. The invert function is a simple voltage inverter. Send a positive 3 volts in and receive -3 volts from the output.

Slew Controls

Amount Control - Controls the amount of glide between voltages.

Slew Input - Voltage input.

Slew Output - Slew voltage output.

Noise / Sample & Hold Controls

N Output - Noise output.

H Input - Hold input.

I Input - Sample input.

O Output - Sample and hold output.

Invert Controls

I Input - Voltage input.

O Output - Inverted voltage output.



MixMult Module

Description

The MixMult is a multi-function module. The top section is a flexible, low-noise three channel mixer and/or attenuator for audio and CV that can be used in several ways. The bottom section contains 2 sets of passive multiples.

Two of the three mixer channels have an output that removes the channel from the mixer circuit and allows it to become a standalone attenuator. The pots are wired with a logarithmic volume curve that is tuned for use with audio but it will work with CV as well.

Patching the output of channel 1 or 2 will remove it from the mixer circuit. Channel 3 cannot be removed from the mixer circuit, however if channel 1 and 2 are all being used as attenuators, channel 3 is the only input remaining in the mixer allowing it to be used as a buffered attenuator.

The mixer section can be used as a...

- 3 Channel Mixer
- 2 Channel Mixer and 1 Attenuator
- 3 Independent Attenuators

The bottom of the module contains two sets of passive multiples. Patching a signal into one of the multiple jacks will split the signal to the remaining two jacks, allowing a single audio or CV signal to be used in two places at once.



LPG (Lopass Gate) Module

Description

The lopass gate module is a multi-mode filter/VCA combo module split into Lopass gate, filter, and VCA modes. The lopass gate mode is unique in the way that it simulates the characteristics of natural instruments. Louder sounds contain more harmonic content and quieter sounds contain less harmonic content. Low pass filter mode adds a resonance control creating a modern, aggressive filter sound. The VCA is an extremely clean, quiet voltage controlled amplifier.

Controls

Frequency Control – In filter mode, the frequency knob controls the center frequency of the filter. In VCA mode, the frequency knob controls the pass through signal level. In lopass gate mode, the frequency knob controls both the center frequency of the filter and the pass through signal level.

Resonance Control - In filter mode, the resonance knob controls the amount of resonance. In VCA mode and lopass gate mode, the resonance knob is not active.

Mode Switch - Switch between G (Gate/VCA), B (Both/Lowpass Gate), and L (Low pass filter) modes.

FM CV Attenuator Control and Input - Frequency modulation CV input and attenuation control.

Invert Switch - Inverts the FM CV signal from positive to negative or negative to positive.

IN - Audio signal input.

PNG - Gate or trigger input used to ping the vactrol and quickly modulate the frequency of the module.

OUT - Audio signal output.



Envelope x2 Module

Description

The Envelope is a complex multi-stage envelope generator with voltage controllable rise and fall. Using the sustain switch to toggle between modes, the Envelope functions as either a 2 stage attack-decay envelope or a 3 stage attack-sustain-release envelope. This module can perform as a voltage controlled envelope generator, slew (portamento), envelope follower, VCO and LFO, pulse delay, wave shaper, and more.

Controls

Rise Response Switch - Switch between linear (up), and non-linear (down) response curve for rise.

Rise Control - Adjust the rise portion of the envelope. Left (short response). Right (long response).

Rise CV In Attenuverter - Attenuverter for Rise CV In. Also functions as log/lin/expo response control.

Sustain Switch - Enable (right) or disable (left) envelope sustain.

Fall Response Switch - Switch between linear (up), and non-linear (down) response curve for fall.

Fall Control - Adjust the fall portion of the envelope. Left (short response). Right (long response).

Fall CV In Attenuverter - Attenuverter for Fall CV In. Also functions as log/lin/expo response control.

Cycle Switch - The envelope will retrigger at the end of the fall stage. Creating a cycling envelope or LFO.

Rise CV Input - Rise CV input.

Both CV Input - Joint Rise and Fall CV input.

Fall CV Input - Fall CV input.

In - Main signal input.

EOA Output - Gate signal output. Signal goes high at end of rise.

Trigger Output - Trigger output. Trigger created at end of fall.

Output - Main signal output.



Dual VCA Module

Description

The Dual Index is a dual linear voltage controlled amplifier (VCA) and a two channel voltage controlled mixer. It has two standalone VCAs and a fully buffered mix output. Each channel offers offset gain and CV attenuation. The CV and IN of channel 2 are normaled to channel 1. If left unpatched, channel 2 will operate using the channel 1 CV and IN signals.

Controls

Index 1 (VCA 1):

CV - CV Input used to control the VCA.

CV Control - CV input attenuator.

In - Signal input.

Out - Signal output.

Index 2 (VCA 2):

CV - CV Input used to control the VCA.

CV Control - CV input attenuator.

In - Signal input.

Out - Signal output.

Mix - Fully Buffered mix of the VCA 1 and VCA 2 outputs.



Outs Module

Description

A simple way to get sound out of the Foundation. Outs is a dual independent output module featuring a stereo 1/4" headphone amplifier output and dual mono 1/4" line level outputs.

Left and Right inputs are available. If only the left input is used, it is sent to both the Left and Right outputs.




Patching A Modular Synthesizer

The following pages contain many examples of how to patch the System 90. These examples showcase the flexibility of the System 90 and highlight as many features from each module as possible. Use the patches provided as a teaching tool. Once you have set up a patch, adjust knobs and remove cables from the System 90 while referencing the module description pages within the manual. This will help you develop an understanding of what function each part of the patch is performing. Red patch cables are CV signals. Green patch cables are audio signals. The blue dots represent the relevant control settings. These dots are meant to represent a starting point and are not definitive settings. Experimentation is essential.

The patch guide provides at least one "Module Test Patch" for each module within the System 90. These patches showcase the core functionality as well as additional features of the highlighted module. In general, the test patches will provide a way to focus attention on the capabilities of a single module and may not provide results that would be considered musical.

Working with individual modules can be fun but the true power of any modular synthesizer comes when different modules start to interact. Patching the output of one module to the input of another is a fundamental part of modular synthesis. Even though the System 90 is designed to be a tabletop modular, the patches can become complex quickly. Any output on the System 90 can be patched to any input. Understanding the capabilities and functionality of each module will allow even the most complex patches to be understood easily.

If you come up with a good patch, we want to try it! Send all your interesting patches to info@pittsburghmodular.com.

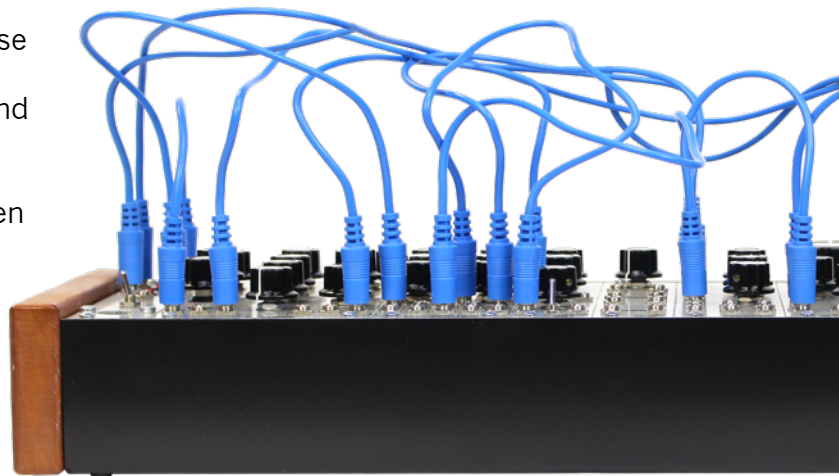

Vintage Monosynth Patch

Description - Monophonic Starting Point

Notes - Use this patch as a starting point for huge bass and classic leads.



Duophonic Synthesizer Patch

Description - Basic Duophonic Starting Point

Notes - Use this patch as a starting point for a duophonic synthesizer.



Dual Monophonic Synthesizers Patch

Description - Basic Dual Monophonic Synthesizer Starting Point

Notes - Use this patch as a starting point for creating two independent synthesizers.



Midi2 Test Patch

Description - Midi2 module Features Highlight

Notes - Audition the features of the Midi2 module.



DNA Symbiotic Waves Test Patch

Description - DNA Symbiotic Waves module Features Highlight



Waveforms Test Patch

Notes - Audition each of the waveforms. The pulse wave is modulated using the Pulse section and PWM CV input. The blade wave is modulated using the Blade CV IN section, Pulse section, PWM CV input, and the Blade Input. The sub oscillator is modulated and gated using the Pulse section and PWM CV input.



LF02 Test Patch

Description - LF02 module Features Highlight

Notes - Audition the range and waveforms of the LF02 module. Use the second knob from the top to adjust the waveform of LF01. Use the switches to control the range of each LFO.



Description - Toolbox module Features Highlight

MixMult Test Patch

Description - MixMult module Features Highlight

Notes - Audition the features of the MixMult module. Note the first channel is used as a passive attenuator and therefore bypasses the mixer circuit. The multiple section is used to split an LFO square wave and send it to two separate destinations.



LPG (Lowpass Gate) Test Patch

Description - LPG module Features Highlight

Notes - Audition the features of the LPG module. Test the FCV (frequency CV input) and PNG (ping gate input) separately. The RES (resonance) control works only in L (low pass filter) mode.



Envelope Test Patch

Description - Envelope module Features Highlight

Notes - Audition the features of the Envelope module. Test each of the outputs separately. The Rise CV control and Fall CV control are attenuverters so left of 12 o'clock is inverting, 12 o'clock is off, and right of 12 o'clock is positive.



Dual VCA Test Patch

Description - Dual VCA module Features Highlight

Notes - Audition the features of the Dual VCA module. Test each of the outputs separately. CV inputs and signal inputs are normaled so patching into the top VCA routes the signal to the bottom VCA unless a patch cable is patched into the inputs of the bottom VCA.



Outs Test Patch

Description - Outs module Features Highlight

Notes - Audition the features of the Outs module. Test each of the outputs separately. Left and Right inputs are normaled so patching into the Left input routes the signal to the Right input unless a patch cable is patched into the Right input of the Outs.



Bad Jazz Patch

Description - Bad robot jazz guitarist jamming with itself.

Notes - Self-generating patch in honor of noodlers everywhere.



Stereo Synthesizer Patch

Description - Stereo synthesizer with an oscillator for each channel.

Notes - Sending each oscillator to a separate output channel and controlling them with the same envelope.



Panning VCA Patch

Description - A single oscillator panning left to right.

Notes - Using a single oscillator and 2 envelopes to pan a sound left to right.



Service and Contact Information

1 Year Limited Warranty:

For a period of one year after the date of original purchase, the instrument and all factory installed parts and modules manufactured by Pittsburgh Modular Synthesizers LLC, are warranted to function properly and be free of defects in materials and workmanship. Should a factory installed module fail during the warranty period, contact Pittsburgh Modular Synthesizers LLC. We will repair it (or at our option, replace it) at no charge, and pay the cost of shipping it back to you.

The case and all case related hardware are warranted to function properly and be free of defects in materials and workmanship for 1 year.

Patch Cables are not covered by the 1 Year Limited Warranty.

This warranty is void if in our opinion the instrument has been damaged by accident, mishandled, altered, improperly serviced, or repaired by the customer where such treatment has affected its performance or reliability. This includes but is not limited to damage related to incorrectly attaching power ribbon cables. In the event of such misuse/abuse by the customer, costs for repairs plus two-way shipping costs will be borne by the customer. Instruments found defective should be returned to the factory carefully packed, as the customer will be responsible for freight damage.

Incidental or consequential damages or costs incurred as a result of product malfunction are not the responsibility of Pittsburgh Modular Synthesizers LLC.

Service and Contact Information

Please contact us for service or other information.

info@pittsburghmodular.com

www.pittsburghmodular.com/contact



PITTSBURGH MODULAR

Copyright 2014 Pittsburgh Modular Synthesizers LLC