

G U A R A N T E E D   F O R   L I F E



M A N U A L

**Thru 3x8™**

3 IN

8 OUT

MIDI THRU BOX

# Thru 3x8™


## 3 IN/8 OUT MIDI THRU BOX

The **Thru 3x8** MIDI Thru Box has three independent inputs and 8 independent outputs. Two of the inputs (In A and In B) are on the front panel and one of the inputs (In C) is on the back panel. All 8 of the outputs are on the back panel.

Each of the Thru 3x8's 8 outputs can be individually connected to any one of the three inputs using the 8, three position dip switches on the front panel. Each of the three position dip switches are assigned to one of the outputs and are labeled "a" (far left position), "b" (center position) and "c" (far right position), corresponding to each of the inputs. To assign a given output to a specific input, set the desired output's front panel slide switch to the desired input. For example, if you want output 5 to be assigned to input "b" make sure that the #5 output switch on the front panel is set to "b" (the middle position). You can do this for all 8 of the slide switches.

Thru 3x8 can be used whenever you have a number of different MIDI devices that need to be routed to different destinations. And because the unit has front slide switches, this routing can be easily changed without having to unplug and re-plug MIDI cables.

## Thru 3x8 Hook-Up Diagram

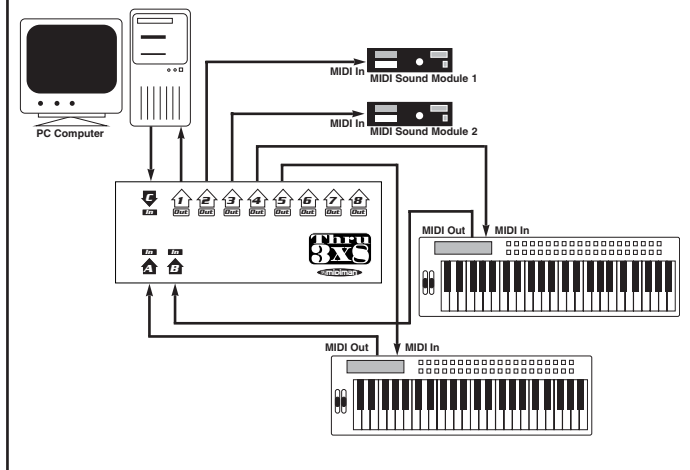

Also, any MIDI signals received at any of the Thru 3x8's MIDI ins are simultaneously sent out all of selected MIDI outs. So the Thru 3x8 can be used to eliminate any "MIDI delay" you may be experiencing because of daisy chaining several MIDI devices together.

The Thru 3x8 uses a 9 volt, center pin positive wall adaptor for power (300 milliamp minimum). To power the unit up make sure that a suitable adaptor

is plugged into the power jack on the back of the unit and also plugged into the wall. Next, depress the power switch on the front left panel. If everything is done correctly, the power LED over the power switch will light.

If you have any questions about your Thru 3x8 please contact our tech support in any of the following ways:

**voice: (626) 445-8495**  
**email: techsupt@midiman.net**  
**fax: (626) 445-7564**



**USA:** 45 E. St. Joseph Street • Arcadia, CA 91006-2861 • Tel: (626) 445-2842  
Fax: (626) 445-7564 • Web: <http://www.midiman.net> • Email: [info@midiman.net](mailto:info@midiman.net)

**UK:** Unit 22, Harrogate Business Park • Freemans Way • Harrogate • N Yorks • HG3 1DH  
England • Tel: 44 1423 886692 • Fax: 44 1423 886693 • Email: [midimanuk@compuserve.com](mailto:midimanuk@compuserve.com)

**Germany:** Kuhallmand 34 • D-74613 Ohringen • Germany • Tel: 49 7941 987000  
Fax: 49 7941 9870070 • Web: <http://www.midiman.de> • Email: [info@midiman.de](mailto:info@midiman.de)