

## POWER

The Aqua Puss can be powered by a single 9V battery or with a Dunlop ECB003 external DC power supply. The power input is a 5.5mm x 2.1mm jack with the positive voltage on the outer sleeve. Using an external power supply will disconnect the battery. Disconnect the input jack to preserve battery life when not in use. The pedal will lock into bypass mode when it is time to change the battery. It also includes power protection circuitry to prevent damage from AC power supplies.


## SPECIFICATIONS

INPUT IMPEDANCE ..... > 300kΩ  
 OUTPUT IMPEDANCE ..... < 1kΩ  
 NOMINAL INPUT ..... -20dBV  
 SIGNAL TO NOISE RATIO\* ..... > 96dB  
 NOISE REDUCTION RATIO ..... 2:1  
 DELAY DISTORTION\*\* ..... ≤ 1%  
 DELAY RANGE ..... 20ms to 300ms  
 DIMENSIONS ..... 4-25/32" x 3-3/4" x 1-3/4"  
 WEIGHT ..... 14oz.  
 BYPASS ..... True Hardwire Relay  
 CURRENT DRAW ..... 16mA  
 POWER SUPPLY ..... 9-VOLT BATTERY, DUNLOP ECB03, DC BRICK, OR CAE MC-403.

\*A-weighted, Vref = 1Vrms

\*\*500Hz, -20dBV input

Features: heavy-duty footswitch with quiet relay-based true bypass, blue LED indicator, 5.5mm x 2.1mm power jack with AC protection, easy access non-detachable battery door, super-duty 0.09" aluminum anodized chassis, high grade components, great tone and cool name.



LIVE TO PLAY LIVE®

JIMDUNLOP.COM wayhuge.com

DUNLOP MANUFACTURING, INC. P.O. BOX 846 BENICIA, CA 94510 U.S.A.  
 TEL: 1-707-745-2722 FAX: 1-707-745-2658 WWW.JIMDUNLOP.COM

92503009259



**WAY HUGE**  
ELECTRONICS

**AQUA-PUSS**  
MK II

WHE701

**Aqua Puss**  
instruction manual

## The legendary Way Huge Aqua-Puss has returned!

The Aqua-Puss MkII is now making its triumphant return, ready to bathe a tone-thirsty world in gorgeously smooth delay. It first appeared on Earth in 1996, an analog delay pedal so warm and vibey that guitarists found they just couldn't live without it.

The Aqua-Puss delivers all the spooky mystery of vintage analog delay and tape-based echo, with none of the hassle of creaky, ancient gear. One twist of the Delay knob takes you from a tight 20ms delay to a cavernous 300ms. The Feedback control regulates delay duration and intensity. But watch out. Extreme settings can send the Aqua-Puss MkII into self-oscillating psycho-freak-out mode! Meanwhile the Blend knob lets you set a balance between dry and delayed signal—from mild to wild.

The Aqua-Puss integrates easily into any guitar rig. Ideal placement in the signal chain would be between your guitar and amp, and before any distortion unit(s). Run a cable from your guitar to the In jack of the Aqua-Puss and run another cable from the Out jack to your distortion unit or amp and you are set.

## Sample Settings

### SLAP-A-BILLY



DELAY - 10:30  
 FEEDBACK - 7:30  
 BLEND - 10 O'CLOCK

### CLASSIC PLEX




DELAY - 5 O'CLOCK  
 FEEDBACK - 11:30  
 BLEND - 8:30

### PSYCHO-FREAK-OUT



DELAY - ROTATE BACK AND FORTH FROM 7 TO 5 O'CLOCK  
 FEEDBACK - 5 O'CLOCK  
 BLEND - 5 O'CLOCK

DELAY - ADJUSTS WARM ORGANIC DELAY TIMES BETWEEN 20ms AND 300ms  
 FEEDBACK - SETS THE NUMBER OF ECHO REPEATS  
 BLEND - REGULATES RATIO OF DRY TO DELAYED SIGNAL

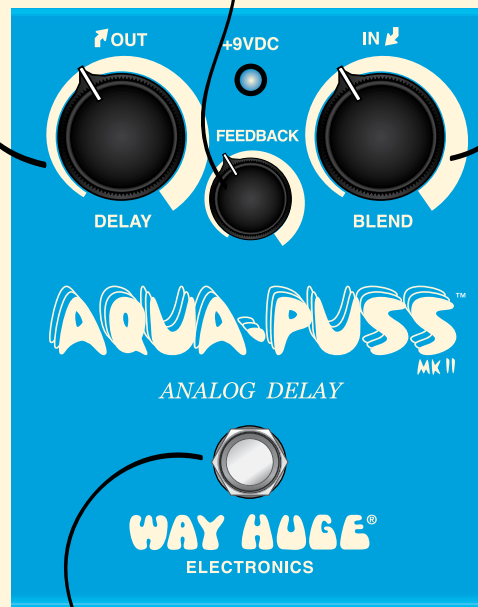

FOOTSWITCH - TOGGLES THE EFFECT ON/TRUE BYPASS (BLUE LED INDICATES EFFECT IS ON)