


ULTRA-G[®] G1100

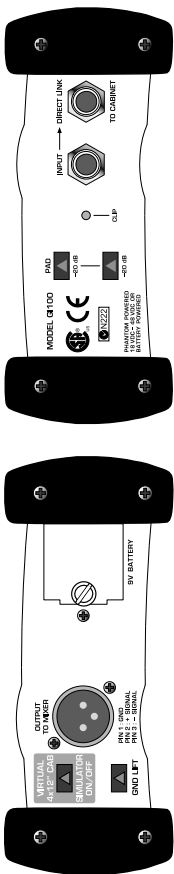

Specifications

Version 1.0 November 2001

ENGLISH



SPECIFICATIONS

Frequency response	10 Hz to 160 kHz
Noise	-99.2 dBu
Distortion	< 0.014% (1 kHz, 0 dBu in)
Input resistance	> 250 kOhm
Connection impedance	> 600 Ohm
Input	1/4" mono jack
Output	XLR balanced
Max. input level	+8/+28/+48 dBu (Simulation OFF) -2/+18/+38 dBu (Simulation ON)
Supply:	
Phantom supply	18 V DC to 48 V DC
Battery	9 V 6LR91
Dimensions	6" (150 mm) x 5" (130 mm) x 2.4" (60 mm)
Weight	approx. 650 g

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may therefore differ from those listed or shown.

The information contained in this manual is copyright protected. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER, ULTRA-G and ULTRA-DI are registered trademarks. BEHRINGER Instrument Amplification is a Division of BEHRINGER. ALL RIGHTS RESERVED.

© 2001 BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany

Tel. +49 (0) 21 54 / 92 06-0, Fax +49 (0) 21 54 / 92 06-30
