



# GM10 Guitar Mic

**\$599 SRP**

## Revolutionary Acoustic Guitar Recording System



### Key Features:

- *Natural Microphone Sound* - Capture the detail and clarity of a classic studio condenser without the (previously) necessary evil of internal pickup and microphone systems.
- *Flexibility of Placement* - Find the unique "sweet spot" of your instrument using the safe and secure mounting system, designed to protect the finest of guitar finishes.
- *Consistency of Position* - Record true, natural performances without worrying about the small placement changes that can affect your sound. The capsule is isolated from the guitar using a patent pending shock mounting system



The **GM 10 Guitar Mic** is a unique new addition to the sE range, designed to solve an age old problem that occurs when recording acoustic guitars. Until now, there has always been a trade off between keeping a consistent mic position and capturing a natural performance. The result is often too clinical and lacks the performance element that can make or break a song.

The GM10 is a true condenser (*not electret*) featuring a 3 micron thick, gold-sputtered capsule with a 14 mm diameter. A proprietary dual shock mount assembly is built into the capsule head and the universal clamping system enables the user to fix the mic in place on any flat-backed acoustic guitar. The capsule is then perfectly placed to record take after take from exactly the same position. The clamping mechanism and shock mount ensure that there is zero mechanical noise transferred through the guitar body.

The GM10 Guitar Mic will transform the way you work in the studio.



Includes complete assembly and deluxe flight case

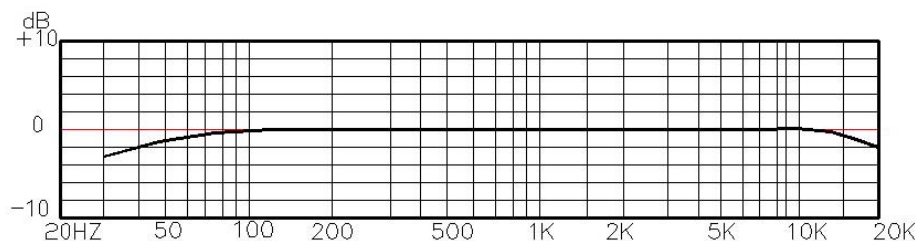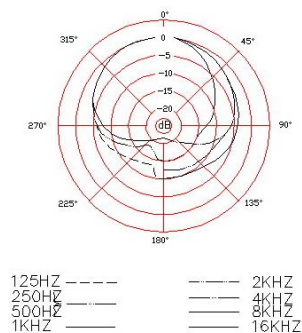

### Technical Specifications

<b>Polar pattern</b> .....	Cardioid	<b>Sensitivity</b> .....	24 mV/Pa - 32 ± 2dB(0dB=1V/Pa 1000Hz)
<b>Diaphragm</b> .....	14mm gold sputtered (17.1 mm housing)	<b>Rated Impedance</b> .....	≤ 50 Ohms
<b>Frequency response</b> .....	20Hz-20KHz	<b>Equivalent noise level</b> .....	10dB (A-weighted)
<b>Max SPL</b> .....	135 dB for THD 0.5%	<b>Power source</b> .....	48V±4V Phantom
<b>Warranty</b> .....	2 years	<b>Output Connector</b> .....	3-Pin XLR



Phone: 617-623-5581 Fax: 617-623-5857  
27 Gilman Ter, Suite 1, Somerville, MA 02145

info@sonicus.net  
www.sonicus.net