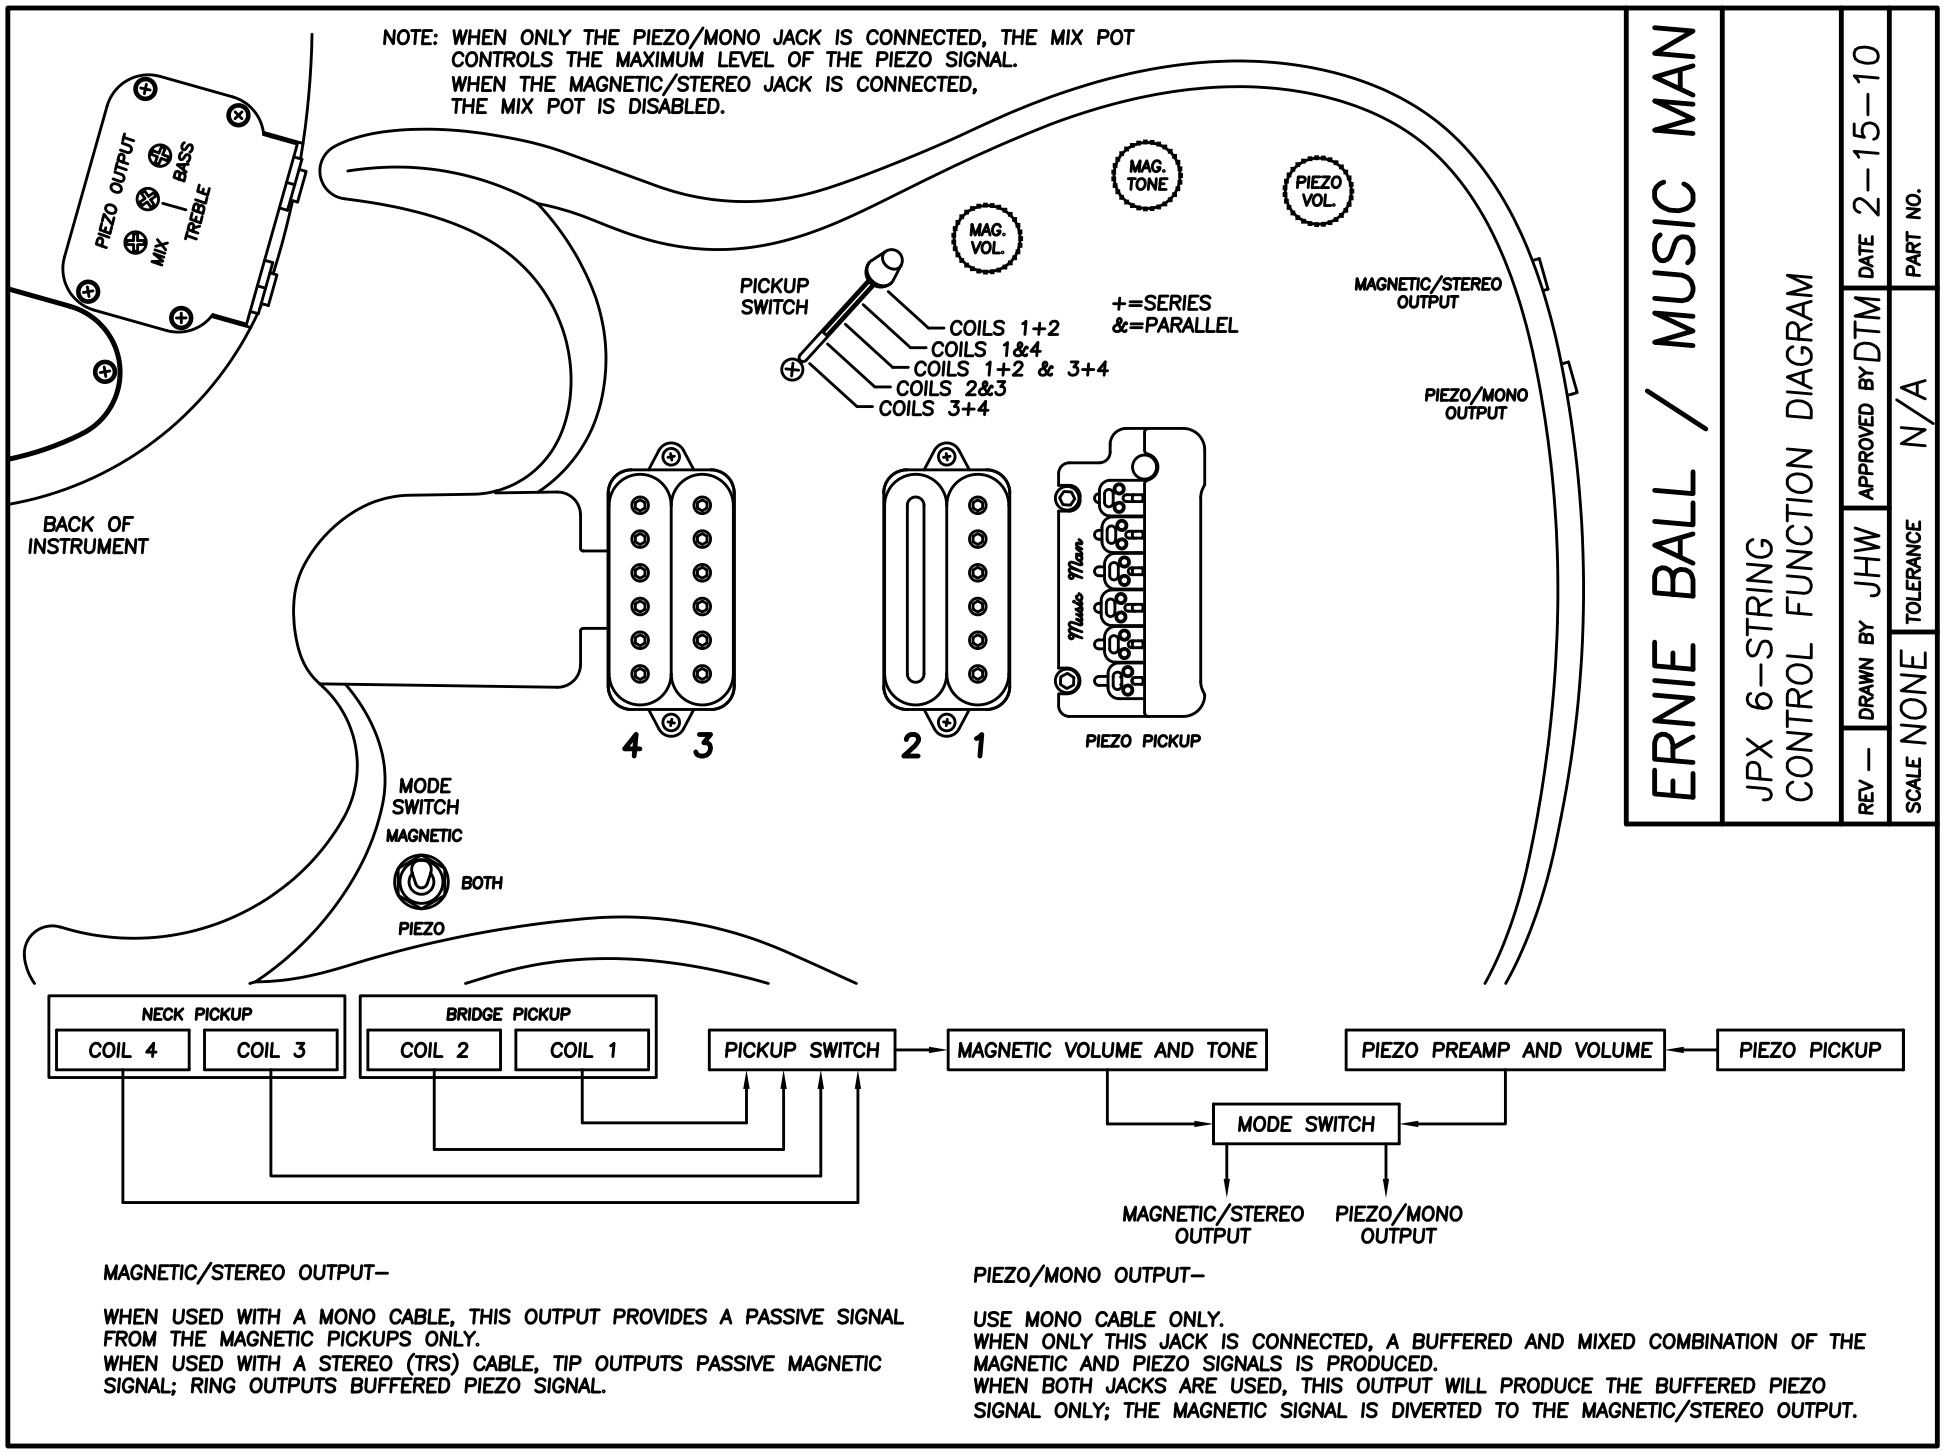

MAGNETIC/STEREO OUTPUT–

WHEN USED WITH A MONO CABLE, THIS OUTPUT PROVIDES A PASSIVE SIGNAL FROM THE MAGNETIC PICKUPS ONLY.
WHEN USED WITH A STEREO (TRS) CABLE, TIP OUTPUTS PASSIVE MAGNETIC SIGNAL; RING OUTPUTS BUFFERED PIEZO SIGNAL.

PIEZO/MONO OUTPUT–

USE MONO CABLE ONLY.
WHEN ONLY THIS JACK IS CONNECTED, A BUFFERED AND MIXED COMBINATION OF THE MAGNETIC AND PIEZO SIGNALS IS PRODUCED.
WHEN BOTH JACKS ARE USED, THIS OUTPUT WILL PRODUCE THE BUFFERED PIEZO SIGNAL ONLY; THE MAGNETIC SIGNAL IS DIVERTED TO THE MAGNETIC/STEREO OUTPUT.