


PMH3000

EUROPOWER

Technical Specifications

Version 1.2 June 2004

ENGLISH

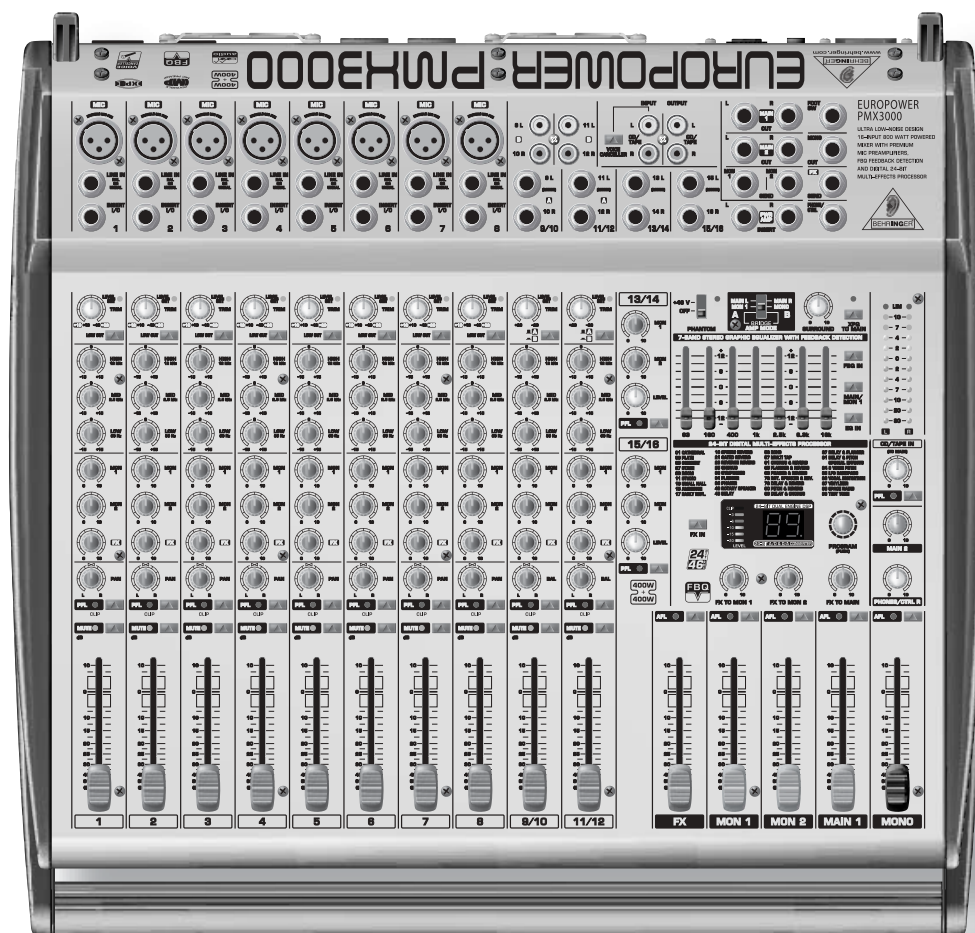

www.behringer.com



EUROPOWER

Ultra-Compact 800-Watt 16-Channel Powered Mixer with 24-Bit Multi-FX Processor and FBQ Feedback Detection System

- ▲ Super-compact 2 x 400-Watt (800 Watts bridged mode) stereo powered mixer
- ▲ Revolutionary and patented COOLAUDIO Amplifier Technology: Enormous power, incredible sonic performance and super-light weight
- ▲ Ultra-compact dimensions at nearly half the weight of conventional powered mixers means no more lugging around dead weight
- ▲ 16-channel mixer section comprised of 8 mono and 4 stereo channels plus separate tape returns
- ▲ Integrated 24-bit stereo FX processor with 99 outstanding VIRTUALIZER presets including reverb, delay, chorus, flanger and more
- ▲ Revolutionary FBQ Feedback Detection System instantly reveals critical frequencies for easy feedback removal
- ▲ 8 high-quality IMP "Invisible" Mic Preamps with switchable +48 V phantom power for condenser microphones
- ▲ Effective, extremely musical 3-band EQ, switchable low cut filter and clip LEDs on all mono channels
- ▲ Stereo 7-band graphic EQ allows precise frequency correction of monitor or main outputs
- ▲ Voice Cancellor function removes singer's voice from recordings for Karaoke applications
- ▲ Selectable stereo (main L/R), double mono (main/monitor) or bridged mono amplifier operation mode
- ▲ Breathtaking XPQ 3D stereo surround effect for more vitality and enhanced stereo image
- ▲ Adjustable stereo CD/tape input for connecting external signal sources
- ▲ Multi-functional stereo preamp outputs for added flexibility
- ▲ Internal switch-mode power supply for maximum flexibility (85 - 250 V~), noise-free audio, superior transient response and lowest possible power consumption
- ▲ Extremely rugged construction ensures long life even under the most demanding conditions
- ▲ Conceived and designed by BEHRINGER Germany. Made in China

SPECIFICATIONS

	PMH3000
MICROPHONE INPUTS	
Type	XLR, electronically balanced, discrete input circuit
Mic E.I.N. (20 Hz - 20 kHz)	
@ 0 Ω source resistance	-134 dB / 136 dB A-weighted
@ 50 Ω source resistance	-131.5 dB / 134 dB A-weighted
@ 150 Ω source resistance	-129 dB / 131 dB A-weighted
Frequency response	< 10 Hz - 155 kHz (-1 dB)
	< 10 Hz - > 200 kHz (-3 dB)
Gain	+10 dB, +60 dB
Max. input level	+12 dBu @ +10 dB gain
Impedance	approx. 2.6 kΩ balanced / 1.3 kΩ unbalanced
Signal-to-noise ratio	109 dB / 112 dB A-weighted (0 dBu IN @ +10 dB gain)
Distortion (THD+N)	0.002% / 0.0018% A-weighted
MONO LINE INPUTS	
Type	1/4" TS connectors, balanced
Impedance	approx. 20 kΩ
Max. input level	+21 dBu
STEREO LINE INPUTS	
Type	1/4" TRS connectors, unbalanced
Impedance	> 3.6 kΩ
Max. input level	+22 dBu
EQUALIZER	
Low	80 Hz / ±15 dB
Mid	2.5 kHz / ±15 dB
High	12 kHz / ±15 dB
CD/TAPE INPUT	
Type	RCA
Impedance	approx. 3.6 kΩ, balanced
Max. input level	+21 dBu
PRE AMP OUTPUTS	
MAIN	
Type	1/4" TRS connectors, unbalanced
Impedance	approx. 150 Ω, unbalanced
Max.output level	+21 dBu
MONITOR	
Type	1/4" TRS connectors, unbalanced
Impedance	approx. 150 Ω, unbalanced
Max.output level	+21 dBu
STEREO OUTPUTS	
Type	1/4" TRS connectors, unbalanced
Impedance	approx. 150 Ω, unbalanced
Max.output level	+21 dBu
Type	RCA
Impedance	approx. 1 kΩ
Max.output level	+21 dBu
MAIN MIX SYSTEM DATA	
Noise	
MAIN MIX @ -∞	-102 dB/-106 dB A-weighted
Channel fader -∞	
MAIN MIX @ 0 dB	-88 dB/-91 dB A-weighted
Channel fader -∞	
MAIN MIX @ 0 dB	-84 dB/-86 dB A-weighted
Channel fader @ 0 dB	
LOUDSPEAKER OUTPUTS	
Type	Compatible to NEUTRIK® SPEAKON®
Load impedance	
MAIN L/R	4 - 8 Ω
MONITOR/MAIN MONO	4 - 8 Ω
MAIN MONO/MAIN MONO	4 - 8 Ω
BRIDGE	8 - 16 Ω
DSP	
Converter	24-Bit Delta-Sigma, 64/128-times oversampling
Dynamics D/A	90 dB
Sampling rate	46.875 kHz
Delay Time	max. 5 s
Signal run time (Line In → Line Out)	approx. 1.5 ms
DISPLAY	
Type	Dual 7-segment LED
AMPLIFIER	
Power amp output	
Power @ 4 Ω	2 x 400 W
Power @ 8 Ω	2 x 200 W
Power @ 8 Ω (BRIDGE)	1 x 800 W
POWER SUPPLY	
Mains voltage	85 - 250 V~, 50 / 60 Hz
Power consumption	700 W
Fuse	T 6.3 A H 250 V
Mains connector	Standard IEC receptacle
PHYSICAL/WEIGHT	
Dimensions (H x W x D)	4 7/8" x 18 3/4" x 18 1/8"
	122 x 476 x 460 mm
Weight	23.815 lb.
	10.8 kg

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. NEUTRIK® SPEAKON® as well as the names of companies, institutions or publications pictured or mentioned and their respective logos are registered trademarks of their respective owners. Their use neither constitutes a claim of the trademarks by BEHRINGER® nor affiliation of the trademark owners with BEHRINGER®. BEHRINGER® accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colours and specification may vary slightly from product. Products are sold through our authorised dealers only. Distributors and dealers are not agents of BEHRINGER® and have absolutely no authority to bind BEHRINGER® by any express or implied undertaking or representation. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studioteknik GmbH. BEHRINGER® is a registered trademark.

ALL RIGHTS RESERVED. © 2004 BEHRINGER Spezielle Studioteknik GmbH.
BEHRINGER Spezielle Studioteknik GmbH, Hanns-Martin-Schleyer-Str. 36-38,
47877 Willich-Münchheide II, Germany
Tel. +49 2154 9206 0, Fax +49 2154 9206 4903