

**Manual For All
Warwick Pro Series® and
Warwick Artist Series®
Bass Guitars**

*Pro Series
Artist Series*

ENGLISH

Dear Customer,

Congratulations on your new Pro Series or Artist Series bass by Warwick.

Warwick's continuing stance on innovation by utilizing the most state-of-the-art technology and the diligence and dedication of each and every Warwick associate combines to create instruments that are cherished by bass enthusiasts worldwide. Our tradition of innovation and contemporary appeal continues with the Pro Series and Artist Series. The Pro Series and Artist Series offers musicians worldwide a high quality, reasonably priced instrument.

At Warwick, our customers are FIRST. We strive to give our consumers the best possible product and best possible customer service and it is you, our satisfied customers, who continue to give us our worldwide success. We are eternally grateful.

Have fun playing your new Pro Series or Artist Series bass by Warwick.

Yours sincerely,

Hans-Peter Wilfer

Index

1) Tuners - Stringing / tuning procedure	5
2) Truss rod cover / Truss rod adjustment	6
3) Nut / Bridge	7
4) Strings	8
5) Pickups	8
6) Electronics for all models	9

Models, specifications

Corvette Standard active / passive	9
Thumb BO	9
Streamer LX	10
Star Bass II	10
Robert Trujillo Artist	10
Bootsy Collins Artist	10
Adam Clayton Artist	11
P-NUT Artist	11
Stuart Zender Artist	11
TM Stevens Artist	11

7) Tips for Body, Neck and Fingerboard Care	12
8) Easy Access Electronics Compartment	13
9) Security Locks	14
10) Warranty / Customer Service	15

1) Tuners - Stringing / tuning procedure

Tuners:

All Warwick Pro Series and Warwick Artist Series instruments come standard with high quality precision tuners (20:1 ratio). Warwick tuners feature a sealed, self-lubricating gear that warrants high tuning stability and needs no maintenance.



The tuners are installed slanted facing the player to improve ergonomics and handling.




The turning resistance of the tuners can be adjusted using a screwdriver.

Stringing / tuning procedure



Place the string's ball end on the bridge string holder. Hold the ball end down with one hand and with the other feed the string to the tuner.

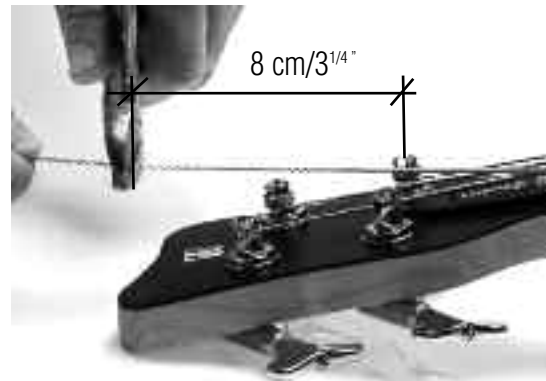

Cut the string approximately 8 cm/3 1/4" behind the tuner. You'll need this excess length for the windings around the tuner's post.



The tuner's post has a slot with a hole in the center. Put the string in that hole before you start winding. This system avoids the string poking out to the side of the tuner and stabilizes the winding, giving the bass better tuning overall.



Tighten the string while winding it around the post. This avoids string slippage and increases tuning stability.



2 - 4 windings around the post are ideal for good tuning and stability.

2) Truss rod cover / Truss rod adjustment

Truss rod cover:

The truss rod cover of a Warwick Pro Series or Warwick Artist Series instrument gives you - when needed - quick access to the truss rod. You'll need a flat screwdriver to unlock the integrated latch mechanism.



Truss rod adjustment:

A neck is set up correctly if it has a slight forward bow. You can easily verify this by pressing the lowest string at the 1st and last fret and measuring the distance between the fret and the string at the 7th fret: it should read between 0.6 and 0.02". This value is independent from the action (height) setup of each individual string.



direction A = neck backward bow



direction B = neck forward bow



Turning the truss rod key clockwise (direction A) will tighten the truss rod and give the neck a back bow. Turning the truss rod key counterclockwise (direction B) will loosen the truss rod and give the neck a forward bow. These adjustments should be done in small steps because the neck's reaction is not instantaneous. You should check the results after approximately one hour and probably check again the following day. Readjust the truss rod if needed.

A change in humidity, particularly during the changing of seasons or during strong weather fluctuations, is when one should pay attention to the neck's setup and the corresponding truss rod adjustment.

3) Nut / Bridge

Nut:

Just A Nut III is the standard on Warwick Pro Series and Warwick Artist Series bass guitars, manufactured using high-tech material with the best tonal characteristics, fine adjustability and stability.



Use the included 1.5 mm Allen wrench to adjust the string's height at the nut.

TIP:




Press down on the string at the 3rd fret.



Check the distance between the first fret and the string. It shouldn't read more than 0.3 mm / 0.01", which equals the thickness of a business card.

Bridge:

The Warwick 3-D Bridge features additional adjustments on top of the floating bridge height adjustment: Intonation, string spacing as well as individual string saddle height adjustment to accommodate the fingerboard's radius.

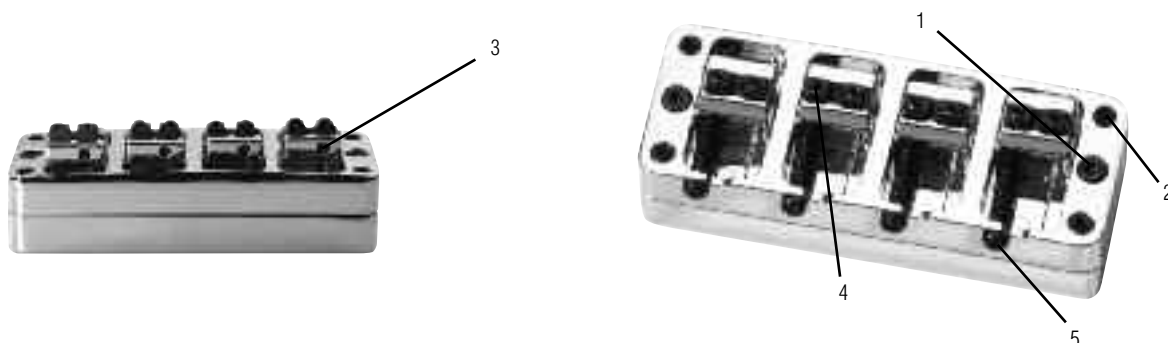

First loosen the locking screw (1) with the included 2.5 mm Allen wrench, the bridge is now unlocked and can be adjusted with the adjustment screws (2). To adjust the height of each individual string saddle as well as adjusting the string spacing, loosen the locking screws (3) with the included 1.5 mm Allen wrench and now the saddle is unlocked. The saddle can now be moved sideways to the left or right to obtain the desired string spacing. In this step you can also adjust the height of each individual string saddle, and for that take the 1.5 mm wrench and adjust the adjustment screws (4). An ideal setup is the one where the strings follow the fingerboard's radius. You can adjust the intonation screws (5) with a screwdriver. Turning the screws clockwise will increase the string's length between bridge and nut; turning them counterclockwise will decrease the string's length. Once the setup is concluded please tighten locking screws 1 and 3 to secure it.

4) Strings

Standard String Gauges for Warwick Pro Series and Warwick Artist Series Models

Warwick RED Strings, computer designed, stainless steel:

4-string: .045" .065" .085" .105" (42200M4 045/105")

5-string: .045" .065" .085" .105" .135" (42200M4 045/105" plus 42135 TC single string)

6-string: .025" .045" .065" .085" .105" .135" (42200M4 045/105" plus 42135TC plus 42025)

Attention!!!

If the string gauge is thicker than .125" we strongly recommend using tapered core strings. Otherwise the string won't fit in the ball end holder. Warwick RED strings stainless steel with tapered core are available as single strings with .130" gauge (42130 TC) or .135" gauge (42135 TC).

5) Pickups

All models are equipped with pickups from such brand name companies as MEC, Seymour Duncan and EMG. More information at: <http://www.mec-pickups.com>, <http://www.seymourduncan.com>, <http://www.emgpickups.com>.

Factory setup:


The factory setup for the pickups is such that pressing the lowest and highest string at the highest fret will create a distance of 2 mm between strings and pickup.

6) Electronics for all models

Corvette Standard active

Active pickups / 2-band active electronics


Volume(Push/Pull*) / Balance / Treble/Bass stacked

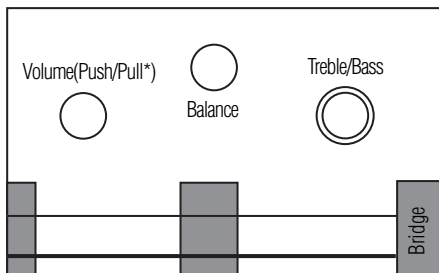

Corvette Standard passive

Passive pickups / passive electronics


Volume / Balance / Tone

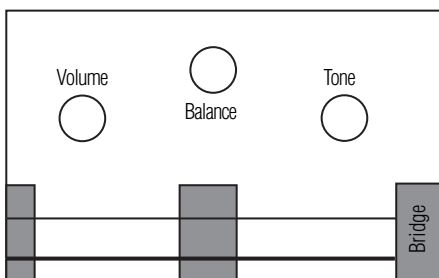

Thumb BO

Active pickups / 2-band active electronics


Volume (Push/Pull*)/ Balance / Treble/Bass stacked

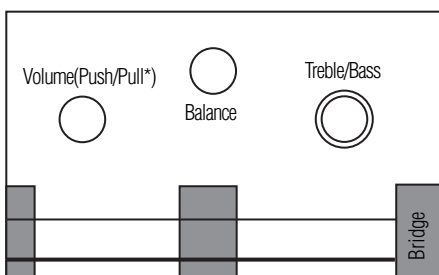

* Pulling on the volume knob bypass the onboard preamp and deactivates the tone controls.


Streamer LX

Active pickups / 2-band active electronics
Volume(Push/Pull*) / Balance / Bass / Treble

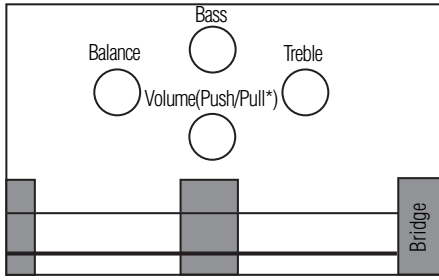


Star Bass II

Passive pickups / passive electronics
Volume neck / Volume bridge / Tone neck / Tone bridge

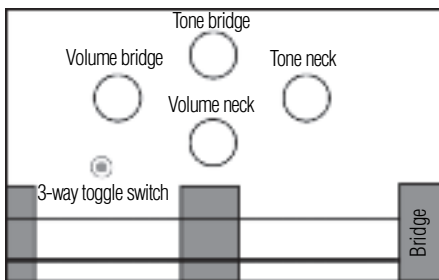


Robert Trujillo Artist

Active pickups / 3-band active electronics
Volume(Push/Pull*) / Balance / Treble/Bass stacked / Mid

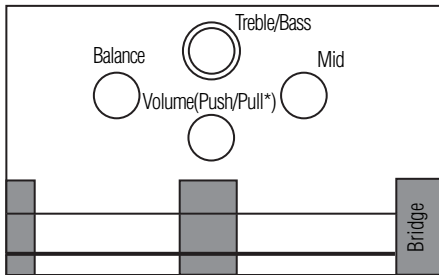

Bootsy Collins Artist


Active pickups / 2-band active electronics
Volume(Push/Pull*) / Balance / Bass / Treble

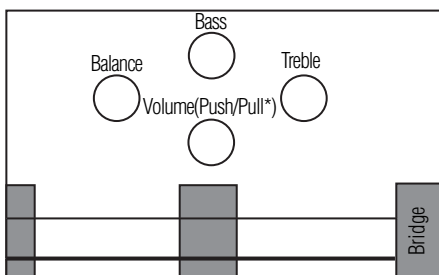

* Pulling on the volume knob bypass the onboard preamp and deactivates the tone controls.


Adam Clayton Artist

Active pickup / 2-band active electronics
Volume(Push/Pull*) / Treble / Bass

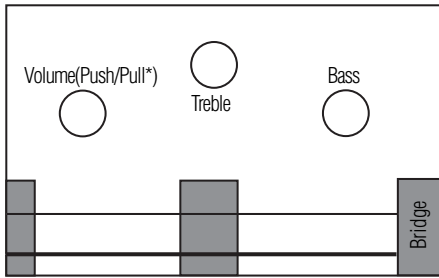


P-NUT Artist

Passive pickups / 2-band active electronics
Volume(Push/Pull*) / Balance / Bass(Push/Pull**) / Treble

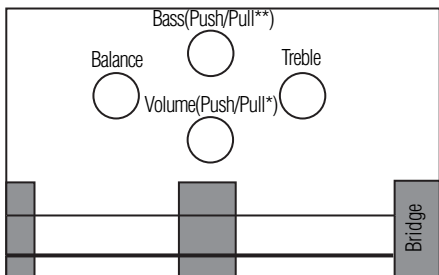


Stuart Zender Artist

Active pickups / 2-band active electronics
Volume(Push/Pull*) / Balance / Bass / Treble

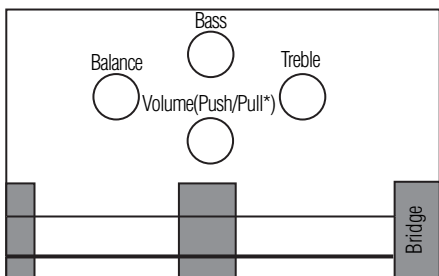

TM Stevens Artist

Active pickups / 2-band active electronics
Volume(Push/Pull*) / Balance / Bass / Treble

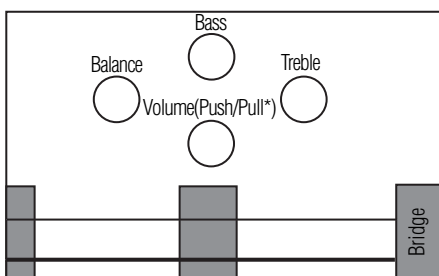

* Pulling on the volume knob bypass the onboard preamp and deactivates the tone controls.

** Push/Pull for splitting humbucker to single coil.

7) Tips for Body, Neck and Fingerboard Care

Tips for Body Care

Colored Oil Finish / Natural Satin Finish:

A matte and transparent surface with visible wood structure and accentuated grain are the essential characteristic of the Colored Oil / Natural Satin Finish. Here the surface is either color stained (Colored Oil Finish) or the wood stays natural and sealed with a thin layer of clear satin matte lacquer (Natural Satin Finish). This sealed and non-colored finish does not need special care. If the surface gets dirty it should be wiped with a damp cloth or with one of the many non-abrasive spray cleaners available in selected stores or specialty shops.



Polishing cloth (SP W 50017)

High Polish Finish:

A High Polish Finish is produced with the use of a high polish lacquer. The wood is completely sealed under the finish; the surface is as smooth as glass and without noticeable wood grain structure. As with Colored Oil/Natural Satin Finish, care is limited to the visual aspects. You can wipe the surface clean with a damp cloth or with the correspondingly suited spray cleaners, or you can use polish that reinstates the full shine of the finish and can also get rid of small scratches and typical traces of playing.

Tips for Neck Care

All Warwick Pro Series and Warwick Artist Series necks are sealed with Natural Satin Finish. The care procedure thus is the same as with Coloured Oil/Natural Satin finished bodies.

Tips for Fingerboard Care

All fingerboards that come standard with Warwick Pro Series and Warwick Artist Series basses are not lacquered and thus require a little maintenance once in a while to avoid getting rough or dull.

To clean and protect the fingerboard use products specially made for this purpose and that are available at selected stores or specialist shops. Please refer to the manufacturer's product information to achieve the desired result.

You can order our cleaning products on our webshop: www.warwick-webshop.de.

8) Easy Access Electronics Compartment

The Easy Access™ Electronics Compartment.



With your fingernails, press on both latches simultaneously to open the compartment.



Lift the upper part with both hands and remove the cover.



9) Security Locks

All Warwick Pro Series and Warwick Artist Series models ship with Warwick Security Locks.

Assembly:



Put the piece with the outside thread in the strap hole.



Put the ring on the thread from the other side of the strap.



Screw the nut on the thread. Tighten with a wrench.



Press the button of the Security Locks to unlatch it so you can remove the strap or put it on.

10) Warranty / Customer Service

Warwick's warranty for all musical instruments is normally limited to 2 years, but this condition may vary from country to country. Please, contact your local Warwick dealer for more information.

In case of a defective product please refer to your musical instruments dealer.

We wish you a lot of fun with your new Warwick Pro Series or Warwick Artist Series bass guitar.

If you have further questions about your instrument feel free to contact us.

Email: info@warwick.de or service@warwick.de

The manufacturer reserves the right to any technical modifications.

Visit our website:

www.warwick.de

Visit our distributor page:

www.warwick-distribution.de

Sign up for our Warwick Newsletter:

www.warwick.de/modules/support/newsletter_register.php?katID=17116&cl=DE

Join the Warwick Forum:

www.warwick.de/forum/

Visit our Webshop:

<http://shop.warwick.de/>

Join our social network on:

<http://www.facebook.com/warwickbasses>


<http://twitter.com/warwickofficial>

<http://www.youtube.com/warwickofficial>

<http://warwickframus.blogspot.com/>



This recycling logo informs the end user that it is forbidden to throw away the product in the trash. It has to be disposed of accordingly.



Weee-Nr.: DE93670540

**Please see the new Warwick Bass Forum on www.warwick.de
For support information please refer to support@warwick.de**

**Visite por favor el nuevo forum Warwick de bajo en www.warwick.de
Para soporte técnico e información, dirigirse por favor a support@warwick.de**

**Por favor veja o novo Fórum de Baixos da Warwick em HYPERLINK www.warwick.de
Para mais informações escreva para HYPERLINK support@warwick.de**

**Visitare il nuovo Forum Warwick Bass: www.warwick.de
Per supporto tecnico: support@warwick.de**

**Veillez consulter le nouveau forum sur les basses Warwick à l'adresse www.warwick.de
Si vous avez besoin de plus d'informations contactez support@warwick.de**

**Das neue Warwick Bass Forum finden Sie auf www.warwick.de
Bei technischen Fragen wenden Sie sich bitte an support@warwick.de**

**ワーウィック・ウェブサイトへお越しください。HYPERLINK "<http://www.warwick.de>"
リニューアルしたワーウィックベースフォーラムをご覧ください。
サポート情報などは HYPERLINK "<mailto:support@warwick.de>" へお寄せください。**

**Nové Warwick Bass Forum najdete na webových stránkách: HYPERLINK "<http://www.warwick.de> www.warwick.de
Máte-li nějaké technické dotazy, pište na: support@warwick.de**

Headquarters: Warwick GmbH & Co. Music Equipment KG • Gewerbepark 46 • 08258 Markneukirchen/Germany • E-Mail: info@warwick.de
Branch China: Warwick Music Equipment (Shanghai) Ltd., Co. • Shanghai Waigaoqiao Free Trade Zone • Shanghai 200131/P.R.China • E-Mail: info@warwick.cn
Branch Switzerland: Warwick Music Equipment Trading (Zurich) GmbH • Kriesbachstrasse 30 • 8600 Dübendorf / Switzerland • E-Mail: info@warwick.ch
Branch CZ/SK: Warwick Music Equipment Trading (Praha CZ) s.r.o. • Spálená 23/93 • 11000 Praha 1 / Czech Republic • E-Mail: info@warwick.cz
Branch Poland: Warwick Music Equipment Trading (Warsaw) Sp. z o.o. • Flory 7/18a • 00-586 Warsaw / Poland • E-Mail: info@warwick.pl
Branch UK/ Ireland: Warwick Music Equipment Trading (Hailsham UK) Ltd. • "Cortland" George Street • East Sussex BN27 1AE / Great Britain • E-Mail: info@warwickbass.co.uk
Branch USA: Warwick Music Equipment Trading (New York USA) Inc. • 76-80 East 7th Street • New York, NY 10003 USA • E-Mail: info@warwickbass.com

Visit us on the World Wide Web: <http://www.warwick.de> & join us in WARWICK BASS FORUM: www.warwick.de/forum

