

CARE AND MAINTENANCE

Your Mackie loudspeakers will provide many years of reliable service if you follow these guidelines:



Avoid exposing the loudspeakers to moisture. If they are set up outdoors, be sure they are under cover if you expect rain.

- Avoid exposure to extreme cold (below freezing temperatures). If you must operate the loudspeakers in a cold environment, warm up the voice coils slowly by sending a low-level signal through them for about 15 minutes prior to high-power operation.
- Use a slightly damp cloth with a mild soap solution to clean the cabinets. Only do this when the power is turned off. Avoid getting moisture into any of the openings of the cabinet, particularly where the drivers are located.

S215 SPECIFICATIONS

Acoustic Performance

<i>Frequency Range (-10 dB)</i>	55 Hz–20 kHz
<i>Frequency Response (-3 dB)</i>	80 Hz–18 kHz
<i>Horizontal Coverage Angle (-6 dB)</i>	90° averaged 2 kHz to 10 kHz
<i>Vertical Coverage Angle (-6 dB)</i>	40° averaged 2 kHz to 10 kHz
<i>Directivity Factor; DI (Q)</i>	12.1 (16.4) averaged 2k Hz to 10 kHz
<i>Sensitivity (1W/1m)</i>	100 dB SPL
<i>Max SPL long-term</i>	127 dB @ 1m
<i>Max SPL peak</i>	130 dB @ 1m
<i>Crossover Point</i>	1300 Hz

Input/Output

<i>Input/Output Type</i>	Neutrik Speakon™ and female 1/4-in. TS jack
<i>Input Impedance</i>	8 ohms
<i>Recommended Amplifier Power</i>	350 watts rms continuous 1400 watts peak

High-Frequency Section

<i>Voice Coil Diameter</i>	1.75 in/44 mm
<i>Horn Exit Diameter</i>	1.0 in/25 mm
<i>Phase Plug</i>	Optimized geometry
<i>Diaphragm Material</i>	Titanium
<i>Magnet Material</i>	Ferrite

Low-Frequency Section

<i>Woofer Diameter</i>	15.0 in/381 mm
<i>Voice Coil Diameter</i>	2.5 in/63 mm
<i>Diaphragm Material</i>	Epoxy-reinforced cellulose
<i>Magnet Material</i>	Ferrite

Safety Features

<i>Input Protection</i>	Dynamic protection for compression driver
-------------------------	---

Construction Features

<i>Basic Design</i>	Trapezoidal, 10° side angles
<i>Material</i>	18 mm multi-layered plywood, resin end caps
<i>Finish</i>	Wear-resistant textured black PVC vinyl
<i>Handles</i>	One on each side, one top, one bottom
<i>Grille</i>	Perforated metal with weather-resistant coating

Physical Properties

<i>Height</i>	32.0 in/81.3 cm
<i>Front Width</i>	19.1 in/48.5 cm
<i>Rear Width</i>	13.9 in/35.3 cm
<i>Depth</i>	18.1 in/46.0 cm
<i>Weight</i>	67 lb/30.4 kg
<i>Mounting Methods</i>	Floor mount only.

The S215 cabinet has no rigging points and is not suitable for flying. *Never attempt to suspend the cabinet by its handles.* The S215 is pole-mountable via the built-in socket on the bottom of the cabinet. Be sure the pole is capable of supporting the weight of the S215 cabinet.

Disclaimer

Since we are always striving to make our products better by incorporating new and improved materials, components, and manufacturing methods, we reserve the right to change these specifications at any time without notice.

“Mackie” and the “Running Man” figure are registered trademarks of LOUD Technologies Inc.

All other brand names mentioned are trademarks or registered trademarks of their respective holders, and are hereby acknowledged.

Need Help?

**You can reach a technical support representative
Monday through Friday
from 7 AM to 5 PM PST at:**


1-800-898-3211

**After hours, visit www.mackie.com and click Support,
or email us at: techmail@mackie.com**




©2004-2005 LOUD Technologies Inc.
All Rights Reserved.


S215 Frequency Response On-Axis

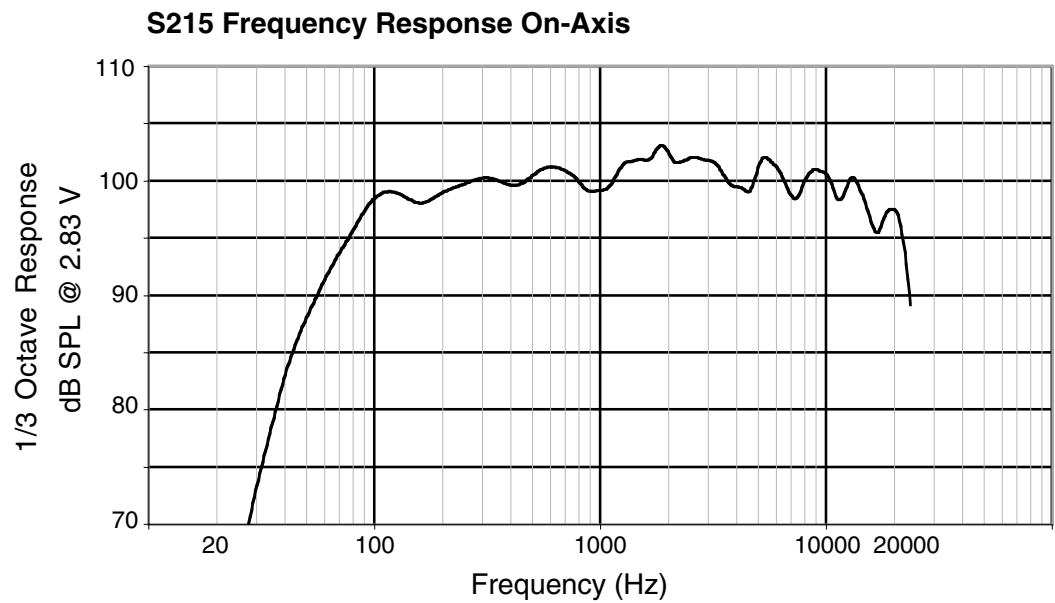

S215 Beamwidth vs. Frequency

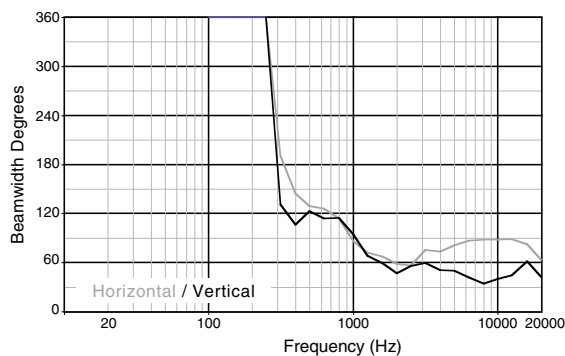

S215 Directivity vs. Frequency

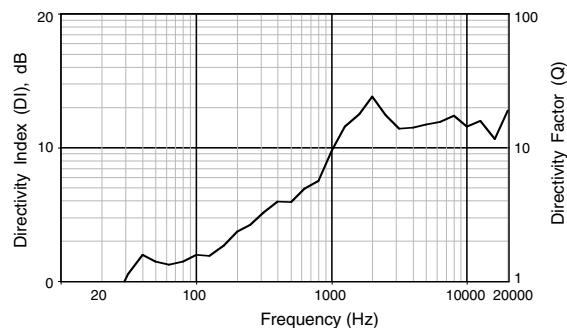

S215 Dimensions

