


Thank you for showing your confidence in us by purchasing the BEHRINGER SUPER OCTAVER SO400. This is the ultimate octaver with polyphonic input and the capability of creating octaves 1 and 2 octaves below the original tone. Take off with ultra-stable octaver sounds plus an aggressive Drive mode for fat overdrive sounds.

## 1. CONTROLS

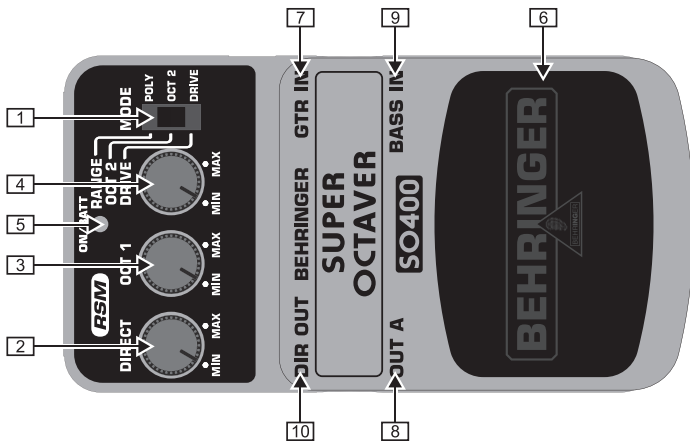

Top view

- 1** The **MODE** switch selects one of the following operation modes:

**POLY:** Single octave sound which allows to play treble tones without effect over bass tones with octave effect.

**OCT 2:** Heavy octave sound, adds a second octave to the first one.


**DRIVE:** Adds an overdrive effect to the original and the octaved signal.
  - 2** The **DIRECT** control adjusts the level of the original input signal (and the DIR OUT connector). In DRIVE mode it adjusts total volume.
  - 3** The **OCT 1** control adjusts the level of the generated signal one octave below the original signal.
  - 4** The function of this knob depends on the position of the MODE switch **1**:

**POLY>RANGE:** Defines the frequency range in which the input signal triggers the octave effect.


**OCT2>OCT 2:** Controls the volume of the second octave.

**DRIVE>DRIVE:** Controls the depth of the overdrive effect.
  - 5** The blue **ON/BATT** LED illuminates when the effect is activated. It also serves as a battery level indicator.
  - 6** Use the footswitch to activate/deactivate the effect.
  - 7** The 1/4" TS connector (**GTR IN**) is optimized for guitars. Use connector **BASS IN** **9** for optimized bass guitar performance.
  - 8** The 1/4" TS connector (**OUT A**) connects to your amp.
  - 9** The 1/4" TS connector (**BASS IN**) is optimized for bass guitars. Use connector **GTR IN** **7** for optimized guitar performance.
  - 10** The 1/4" TS connector (**DIR OUT**) passes the unaffected input signal through, as long as the effect is inactive. Thus OUT A is muted. When the effect is active, the effects signal is sent through OUT A while the DIR OUT carries the input signal. The volume of the DIR OUT signal is depending on the DIRECT control's setting. This output configuration is useful when different effects should be added to the input signal and the effect signal, after the octave pedal's output.
- 👉 If the DIR OUT connector is not in use, the unaffected input signal and the effect signal are both sent out through OUT A, depending on the effect activation.**

Use the **DC IN** connection at the front of the unit to plug in a 9 V power supply (not included). The **BATTERY COMPARTMENT** is located underneath the pedal cover. To install or replace the 9 V battery (not included), press the hinges with a ballpoint pen and remove the pedal cover. Be careful not to scratch the unit.

-  The SO400 has no On/Off switch. It is operable as soon as you insert a plug into one of the IN connectors. Disconnect the plug, if you don't use the SO400. In doing so, you can extend the life time of the battery.

The SERIAL NUMBER is located at the underside.

-  In rare cases interferences of the normal function may appear by external influence (e.g. electrostatic discharge), as for example sound disturbances or malfunctions. If this occurs, please turn down the volume on subsequent amplifiers and disconnect the input connector briefly to restart the application.

## 2. WARRANTY

For our current warranty terms, please refer to our website at <http://www.behringer.com>.

## 3. SPECIFICATIONS

|                                  |                       |   |
|----------------------------------|-----------------------|---|
| GTR IN / BASS IN                 | Connector             | 1/4" TS   |
|                                  | Impedance             | 500 kΩ  |
| DIR OUT / OUT A                  | Connector             | 1/4" TS   |
|                                  | Impedance             | 1 kΩ  |
| Power supply<br>BEHRINGER PSU-SB |                       | 9 V $\approx$ , 100 mA regulated                          |
|                                  | USA/Canada            | 120 V~, 60 Hz   |
|                                  | China/Korea           | 220 V~, 50 Hz   |
|                                  | Europe/U.K./Australia | 230 V~, 50 Hz   |
|                                  | Japan                 | 100 V~, 50 - 60 Hz  |
|                                  | Export model          | 120/230 V~, 50 - 60 Hz                                    |
| Power connector                  |                       | 2 mm DC jack, negative center                             |
| Battery                          |                       | 9 V type 6LR61  |
| Power consumption                |                       | 60 mA   |
| Dimensions (H x W x D)           |                       | approx. 54 mm (2 1/8") x 70 mm (2 3/4") x 123 mm (4 4/5") |
| Weight                           |                       | approx. 0.33 kg (0.73 lbs)                                |

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may therefore differ from those listed or shown.

## 4. SAFETY INSTRUCTIONS

Do not use near water, or install near heat sources. Use only authorized attachments/accessories. Do not service product yourself. Contact our qualified servicing personnel for servicing or repairs, **especially when power supply cord or plug is damaged.**

No utilizar cerca de agua o instalar cerca de fuentes de calor. Utilice sólo accesorios y aditamentos autorizados. No intenté reparar el producto usted mismo. Contacte a nuestro personal técnico cualificado para servicio y reparaciones, **especialmente cuando la fuente o el cable de alimentación estén dañados.**

Не эксплуатировать прибор вблизи от источников воды и тепла. Применять только авторизованные дополнительные устройства. Никогда не ремонтируйте прибор самостоятельно. Ремонт может производить только квалифицированный специализированный персонал, **особенно при повреждениях сетевого провода или сетевой вилки.**

水分の近くや、ヒーターなど熱気のある場所では使用しないでください。正式に認可された付属品のみを使用してください。製品はご自分では決して修理せず、特に電源コードもしくはプラグが損傷した場合には、必ず製品サービスおよびリペアの資格を有した当社の担当員にご相談ください。

不要在靠近水源的地方使用，或在靠近热源的地方安装。只使用经过许可的附件 / 配件。不要自己进行产品维修，**尤其是当电源线或插座损坏的时候**，请联系我们的专业服务人员有关产品维修事宜。

Die deutsche Anleitung ist erhältlich @ [www.behringer.com](http://www.behringer.com)

Manuel francophone en téléchargement sur [www.behringer.com](http://www.behringer.com)

Manual en español disponible en [www.behringer.com](http://www.behringer.com)

Manuali italiani disponibili @ [www.behringer.com](http://www.behringer.com)

Русскоязычное руководство @ [www.behringer.com](http://www.behringer.com)

Polska instrukcja dostępna jest pod adresem @ [www.behringer.com](http://www.behringer.com)

Nederlandse handleiding beschikbaar @ [www.behringer.com](http://www.behringer.com)

Suomenkielinen käyttöohje saatavilla osoitteesta [www.behringer.com](http://www.behringer.com)

Svensk manual finns tillgänglig på [www.behringer.com](http://www.behringer.com)

Dansk vejledning findes på @ [www.behringer.com](http://www.behringer.com)

Manual português disponível @ [www.behringer.com](http://www.behringer.com)

Ελληνικό εγχειρίδιο υπάρχει διαθέσιμο στη διεύθυνση [www.behringer.com](http://www.behringer.com)

日本語版マニュアル @ [www.behringer.com](http://www.behringer.com)

使用说明书可在 [www.behringer.com](http://www.behringer.com) 下载

Technical specifications and appearance are subject to change without notice. The information contained herein is correct at the time of printing. BEHRINGER accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colors and specifications may vary slightly from product. Products are sold through our authorized dealers only. Distributors and dealers are not agents of BEHRINGER and have absolutely no authority to bind BEHRINGER by any express or implied undertaking or representation. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER International GmbH. ALL RIGHTS RESERVED. © 2007 BEHRINGER International GmbH. BEHRINGER International GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Muenchheide II, Germany. Tel. +49 2154 9206 0, Fax +49 2154 9206 4903

# FEDERAL COMMUNICATIONS COMMISSION

## COMPLIANCE INFORMATION



Responsible party name: **MUSIC Group Services USA, Inc.**

Address: **18912 North Creek Parkway,  
Suite 200 Bothell, WA 98011,  
USA**

Phone/Fax No.: **Phone: +1 425 672 0816  
Fax: +1 425 673 7647**

### **SUPER OCTAVER SO400**

complies with the FCC rules as mentioned in the following paragraph:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

### **Important information:**

Changes or modifications to the equipment not expressly approved by MUSIC Group can void the user's authority to use the equipment.