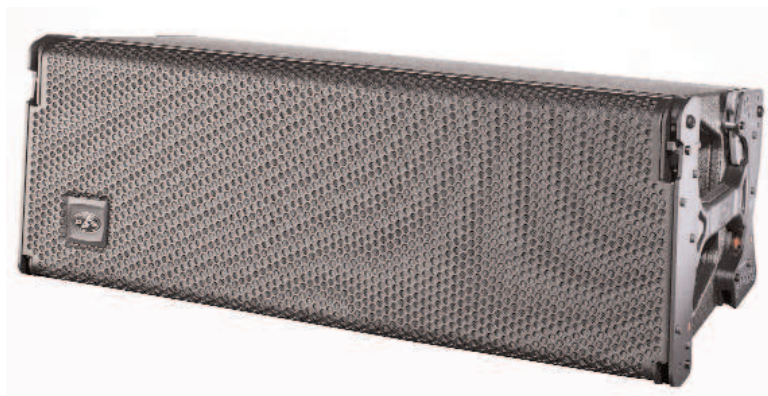


event 210A

Powered, tri-amplified
compact line array module

» Tri-amplified 3-way system

» Light-weight Class D amplifier

» Easy-DSP™ Interface

» Top grade Birch cabinet construction

» Robust “quick-rig” professional rigging hardware

The Event 210A makes use of the M-75 compression driver with 75 mm aluminum EFW voice coil and titanium diaphragm for HF reproduction. The proprietary injected aluminum HF waveguide has been designed specifically for the Event Line Arrays providing precise 90° horizontal coverage.

The Event 210A low/low-mid frequencies are reproduced by two 10" cone speakers. This section uses a "twin-band" configuration where each speaker operates in a specific frequency range. At low frequencies, the speakers work in tandem for maximum power, each driven by a dedicated amplifier channel providing 360 W_{peak} output power. Above the low frequency range, the advanced digital signal processing feeds the mid signal to only one of the two low frequency drivers, while the other is rolled off. This technique eliminates

off-axis interference between the drivers enabling the Event Line Arrays to maintain optimal polar and frequency response characteristics throughout the low and low-mid operating ranges.


Each individual enclosure for the low frequency drivers has been tuned to provide optimum response for the specific operating range of each driver. In the same fashion, the digital signal processing, limiting and protections are specific to each way, reducing intermodulation distortion.

The Easy-DSP™ Interface provides fast and easy line array configuration. The frequency response of each unit can be modified depending on the number of units in the array. A “downfill” correction is also available.

Technical Specifications


Low Frequency Power Amplifier	360 W _{peak} - 180 W _{continuous}
Mid Frequency Power Amplifier	360 W _{peak} - 180 W _{continuous}
High Frequency Power Amplifier	360 W _{peak} - 180 W _{continuous}
Input Type	Balanced Differential Line
Input Impedance	Line: 20 kohms
Sensitivity	Line: 6.2 V (+18 dBu)
On-axis Frequency Range (-10 dB)	70 Hz - 20 kHz
Maximum Peak SPL at 1 meter	134 dB
Nominal -6 dB Beamwidths	90° Horizontal - Splay Dependent Vertical
Enclosure Material	Birch Plywood
Finish	Black/ISO-Flex Paint
Transducers/Replacement Parts	LF: 1 x 10Mi4/GM 10Mi4 MF: 1 x 10Mi4/GM 10Mi4 HF: 1 x M-75/GM 75
Connectors	INPUT: Female XLR LOOP THRU: Male XLR AC INPUT: powerCON FCA AC OUTPUT: powerCON FCB
AC Power Requirements	115 V, 3 A, 50 Hz/60 Hz 230 V, 1.5 A, 50 Hz/60 Hz
Dimensions (H x W x D)	27 x 73 x 36.6 cm - 10.6 x 28.7 x 14.4 in
Weight	34 kg (74.8 lb)
Accessories (optional)	AX-event 210 / Pick-Up AX-event 210 / AXS-event 210 / PL-event210S / FUN-4-event210

Dimensions

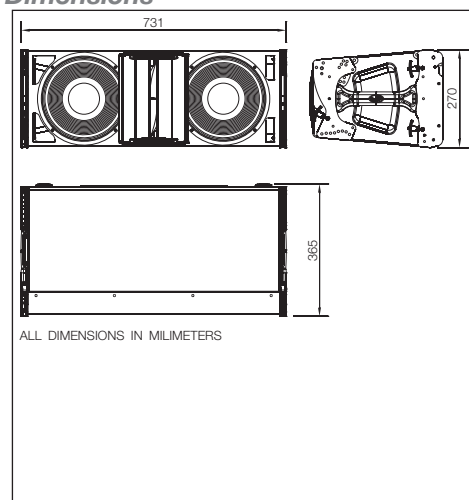


Frequency Response

Shows the frequency response at 1 m of a unit radiating to an anechoic environment and driven by a swept sine wave signal (-10 dBSu input - 1 unit pre-set).

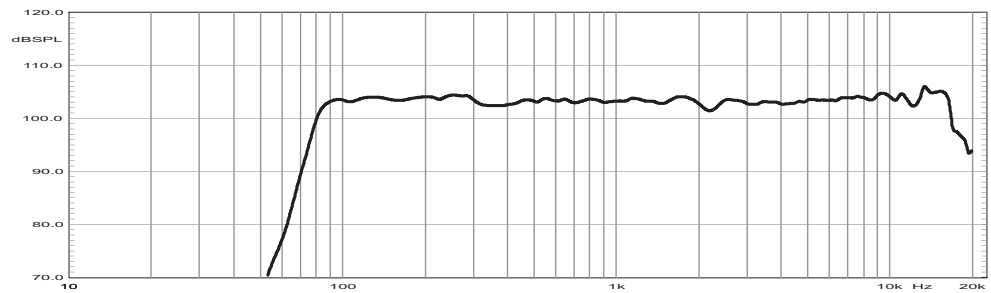


Distortion

Shows the Second Harmonic Distortion (grey) and Third Harmonic Distortion (dotted) curves for a unit driven by a swept sine wave signal (0 dBSu input).

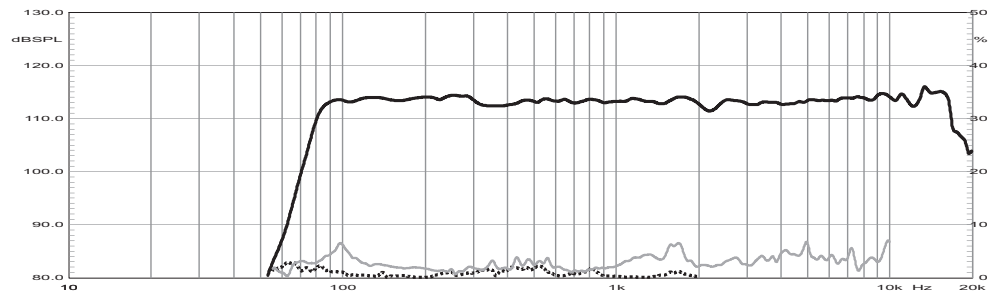


Horizontal Directivity

Shows normalized horizontal isobar plot.

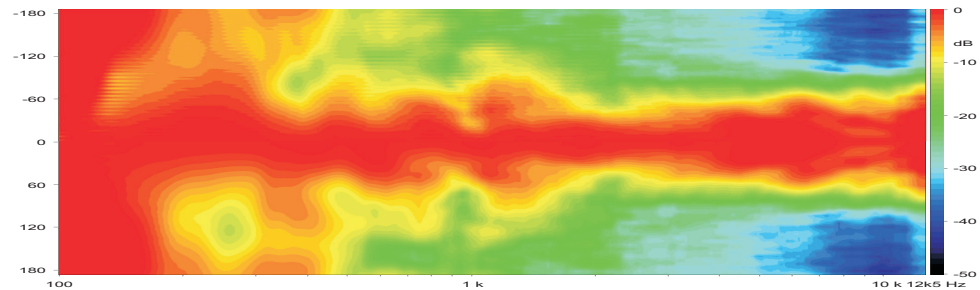


Vertical Directivity

Shows normalized vertical isobar plot.

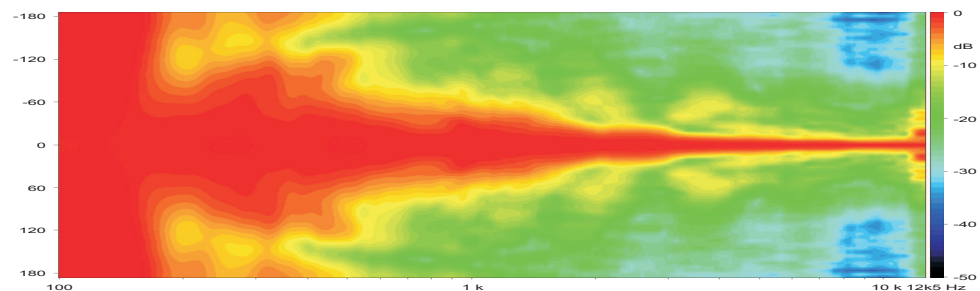

Polar Response

Shows the 1/3 octave band horizontal (left) and vertical (right) polars for the indicated frequencies. Full scale is 30 dB, 6 dB per division.

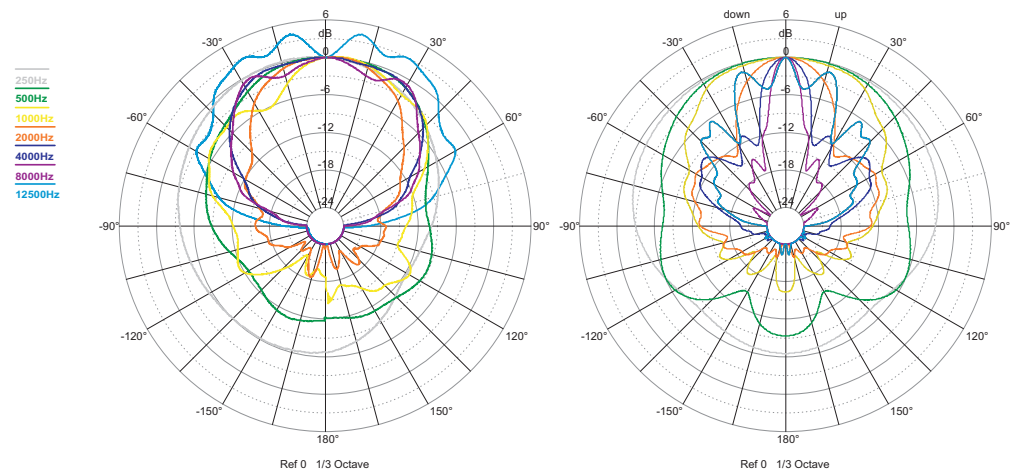

NOTES. 1.Frequency response: referred to 1 m; low end obtained through the use of near field techniques; one-third octave smoothed for correlation with human hearing. 5.Polars were acquired by placing the unit on a computer controlled turntable inside our anechoic chamber. Measurement distance was 4 m.

Product improvement through research and development is a continuous process at D.A.S. Audio. All specifications subject to change without notice.



D.A.S. Audio S.A.
C/ Islas Baleares, 24
46988 Fuente del Jarro
Valencia - SPAIN
Tel. 961 340 525 - Tel. Intl. +34 961 340 860
Fax 961 340 607 - Fax Intl. +34 961 340 607

D.A.S. Audio of America Inc.
Sunset Palmetto Park - 6816 NW 77th Court
Miami, FL 33166 U.S.A.
Tel. 305 436 0521 - Fax. 305 436 0528
Toll Free: 1 888 DAS 4 USA

D.A.S. Audio Asia Pte. Ltd.
25 Kaki Bukit Crescent # 01-00/ 02-00
Kaki Bukit Techpark I - Singapore 416256
Co. Reg. No. 200704134E
Tel. +65 6742 0151 - Fax. +65 6742 0157

www.dasaudio.com