

POWER360™

Ultimate Power Protection and USB Charging



P360-Dock
Charges 2 mobile phones or one tablet



P360-6

P360-8

Charges 2 mobile phones or one tablet per module.



Protect-or-Disconnect
Keeps electronics safe from power spikes.



SmartGuard
Protects against brownouts and other dangerous voltage conditions.



Circle of Protection
LED indicator monitors wiring, voltage, and protection status



USB Chargers
2.1A capacity and can charge up to two devices simultaneously (two mobile devices or one tablet)



AC Outlets
Outlets allow flexible cord and plug placement.



Powerful Warranty
Lifetime product warranty plus \$75,000 connected equipment warranty P360-Dock, P360-6 \$250,000, & P360-8 \$500,000

Best in class protection with our over/under voltage protection technology - the best protection ever available at this price point!

Convenient & innovative USB charging with a spot to rest a phone and/or tablet directly on the wall tap model and removable USB chargers that can be tethered to your desktop on the floor models.

Circle of Protection indicator offers peace of mind at a glance with protection, voltage and wiring status lights.


3 Models: P360-Dock - ideal for general use. P360-6 ideal for home office. P360-8 ideal for home entertainment.

POWER360™ Ultimate Power Protection and USB Charging

P360-Dock


- Best in class protection with Protect-Or-Disconnect + SmartGuard active over/under voltage protection with auto reset.
- Charging cradle accommodates two mobile phone devices or one tablet for convenient charging
- “Circle Of Protection” displays protection, wiring, and voltage status. May be switched off.
- 2 high capacity USB ports
- 6 AC outlets (3 front, 3 bottom)

P360-Dock

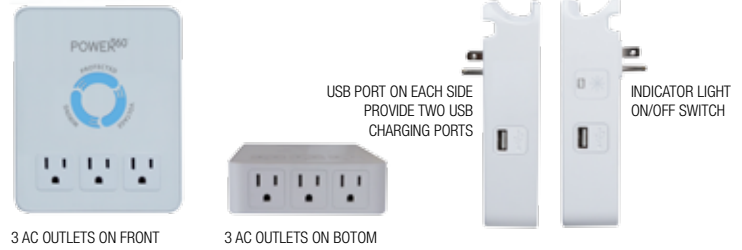


P360-6

- Best in class protection with Protect-Or-Disconnect + SmartGuard active over/under voltage monitoring
- Detachable USB module tethers to P360-6 for convenient USB charging on table or desktop (6' cable included)
- “Circle Of Protection” displays protection, wiring, and voltage status
- 2 high capacity USB ports
- 6 AC outlets
- Coax and Telco surge protection

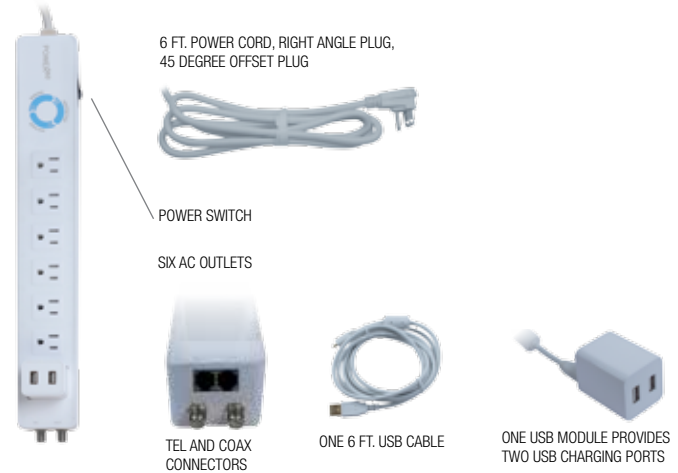

P360-8

- Best in class protection with Protect-Or-Disconnect + SmartGuard active over/under voltage monitoring
- Detachable USB module tethers to P360-6 for convenient USB charging on table or desktop (6' cable included)
- “Circle Of Protection” displays protection, wiring, and voltage status
- RFI/EMI AC filtering
- 4 high capacity USB ports
- 8 AC outlets
- Coax+Telco/LAN surge protection

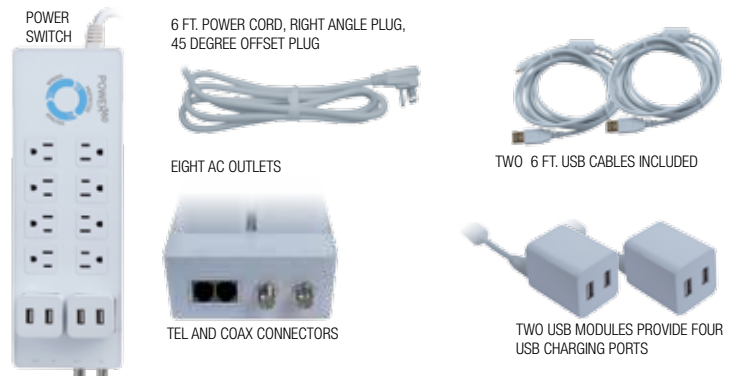

| AC SURGE PROTECTION, Common for all 3 models except for Joules rating* | | | | TELEPHONE PROTECTION For P360-6 and P360-8 only | | MODEL | BAR CODES | QUANTITIES |
|--|-------------------|-------------------|-------------------|---|--|-----------|---|--|
| Voltage..... 120 Vac | | | | Connectors.....RJ-11 (6P2C) | | P360-Dock | 050616-009973 30050616009974 50050616009978 | Single Unit Inner Pack = 10 Master Pack = 20 |
| Current..... 15 A | | | | Clamping Voltage.....300V | | | | |
| UL 1449 VPR (pending UL)..... 500 V | | | | COAXIAL PROTECTION For P360-6 and P360-8 only | | P360-6 | 050616-009980 30050616009981 50050616009985 | Single Unit Inner Pack = 5 Master Pack = 10 |
| Nominal Discharge Current.....3 kA | | | | Connectors.....Type-F | | | | |
| Energy Dissipation.....1080 J | | | | Clamping Voltage.....75VDC | | P360-8 | 050616-009997 30050616009998 50050616009992 | Single Unit Inner pack = 5 Master pack = 10 |
| 1620 J for P360-8* | | | | Insertion Loss.....<0.5dB @ 300kHz-2.4GHz | | | | |
| Overvoltage Shutoff.....140 Vac +/- 7Vac | | | |  <p>SPECIFICATIONS SUBJECT TO CHANGE DUE TO PRODUCT UPGRADES AND IMPROVEMENTS.</p> | | | | |
| Undervoltage Shutoff.....95 Vac +/- 5Vac | | | | | | | | |
| USB CHARGING | P360-Dock, | P360-6 | P360-8 | | | | | |
| Ports | 2 USB Type A | 2 USB Type-A | 4 USB Type-A | | | | | |
| Removable Modules | No | 1 module | 2 modules | | | | | |
| Output Voltage | 5.0VDC +/- 0.5VDC | 5.0VDC +/- 0.5VDC | 5.0VDC +/- 0.5VDC | | | | | |
| Output Current, per port | 1 A max | 1 A max | 1 A max | | | | | |
| Output Current, total | 2 A max | 2 A max | 4 A max | | | | | |

