

1. Hold the STANDBACK with the logo right-side-up and facing you. Slip turning peg into slot - do not turn the peg yet.



2. Fasten the black strap over the peg and turn the peg 90° until it locks.

(Tip: When assembling for the 1st time use the end eyelet.)





3. Making sure the red straps are not twisted, snap them into place. (Tip: When assembling for the 1st time use the end snaps.)




4. Lean your amp forward and position the foam block centered just underneath the amp bottom.

foam block

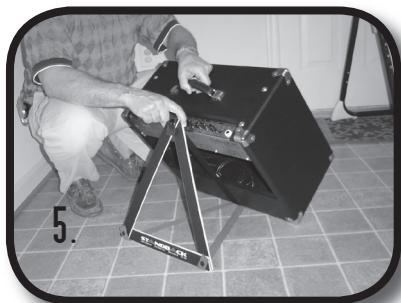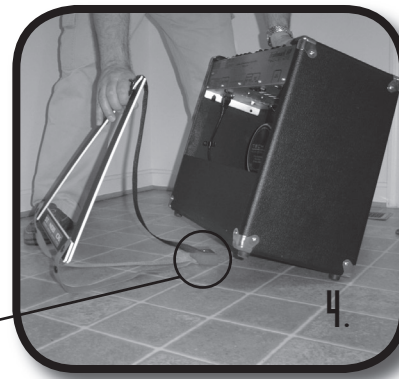

5. Making sure the straps are taut, lean the amp back until it rests on the black strap and is supported by the STANDBACK.

6. Pull the bottom of the STANDBACK away from the amp to ensure stability.

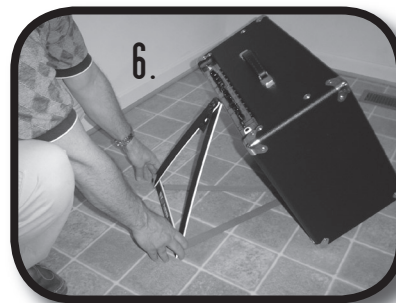

7. Plug in guitar and Rock and Roll!  
To store - turn peg, remove straps and fold.

To see assembly  
video go to:  
[standback.net](http://standback.net)



The STANDBACK is adjustable for your preferred amp angle and is suitable for most amp sizes. Please call our support line for any questions or feedback.

Toll free: 1-866-786-3225