


AUDIO REPAIR AND ENHANCEMENT

2014
EDITION

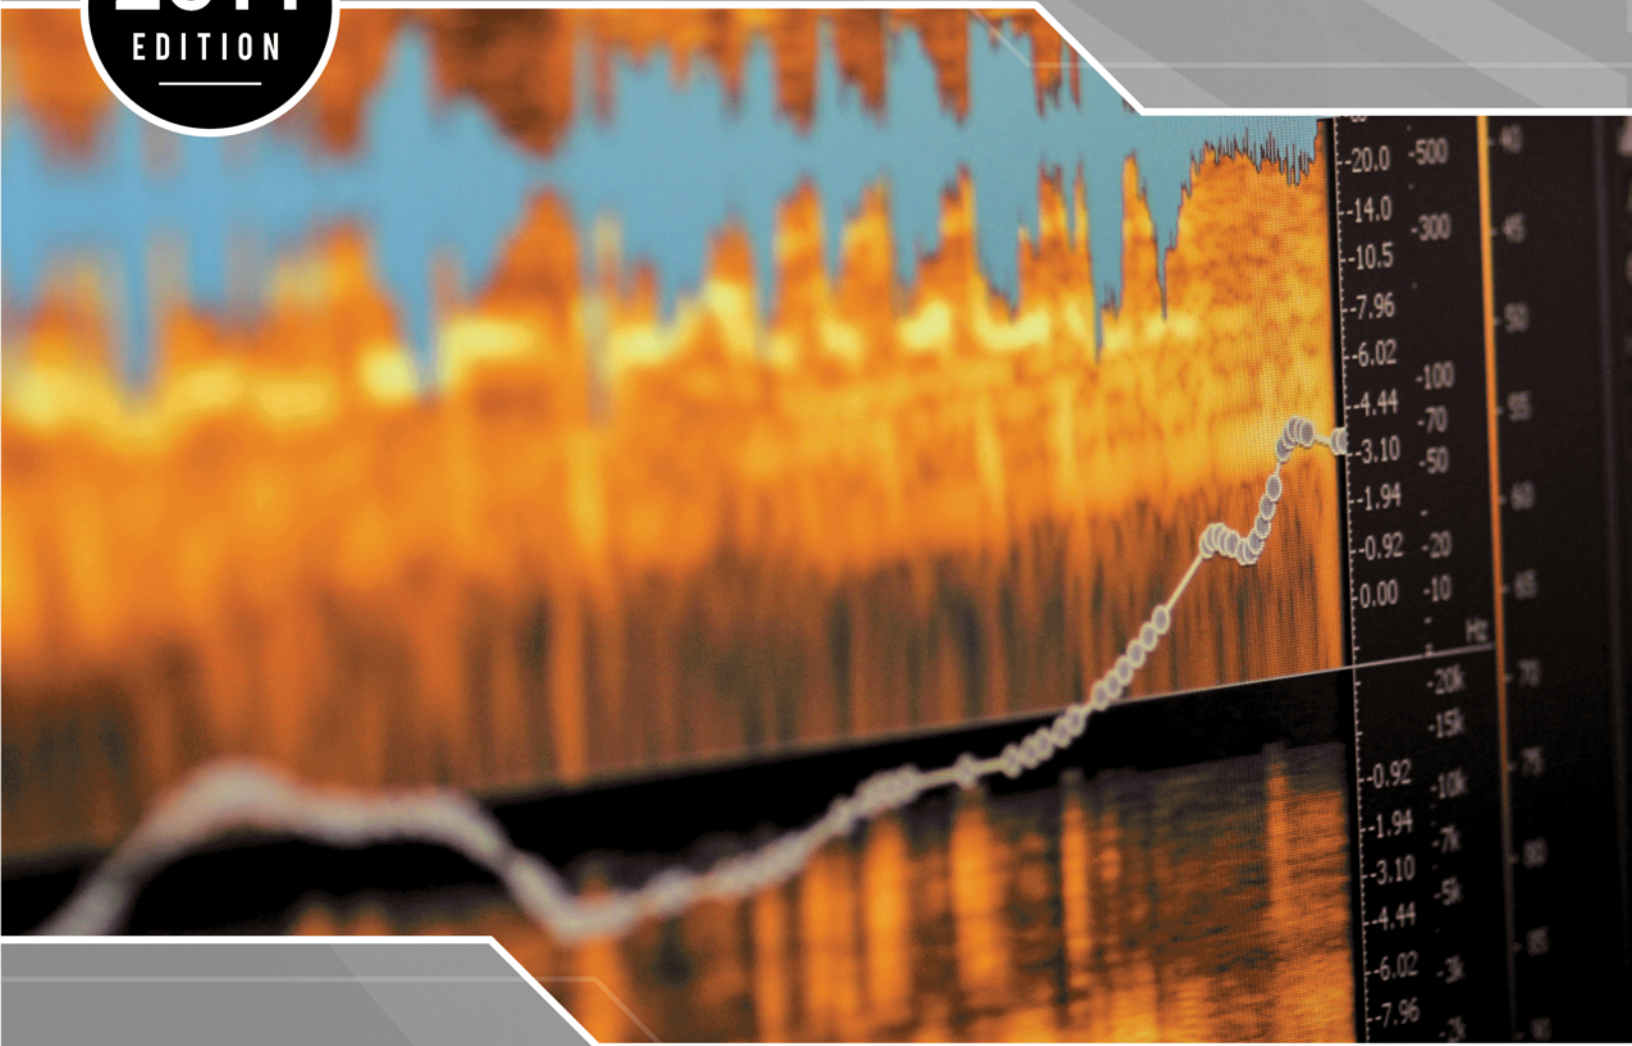

TOOLS, TIPS,
and TECHNIQUES



TABLE OF CONTENTS

1: INTRODUCTION	5
Intended Audience for this Guide	5
About the 2014 Edition.....	6
Additional Resources	6
About iZotope	6
2: WHAT IS AUDIO REPAIR AND RESTORATION?	7
3: AUDIO REPAIR AND RESTORATION BASICS	8
Defining the Outcome.....	8
Repair and Restoration Tools	8
General Recommendations when Repairing or Restoring Audio.....	10
Restoration Quick Tips	10
The Tools of the Trade	11
4: UNDERSTANDING SPECTROGRAMS / IDENTIFYING AUDIO PROBLEMS	12
What's the Goal of Using a Spectrogram?	12
Principles of Spectrogram Displays.....	13
Spectrogram Types.....	16
Using a Spectrogram to Identify Audio Problems	18
5: WHAT IS RX 4?	24
What Can RX 4 Do?.....	24
Where Can I Use RX 4?	24
6: DENOISING	25
What's the Goal of Denoising?.....	25
Principles of Denoising	25
Using the Denoiser and Hum Removal in RX 4.....	27
7: TIPS AND TRICKS FOR EDITING DIALOGUE	28
What's the Goal of Dialogue Editing?.....	28
Tips for Tackling Distortion	28
Tips for Tackling Background Noise (Steady State).....	35
Tips for Tackling Plosives and Mouth Sounds	41
Plosives	42
Mouth Noises.....	47
Tips for Tackling Matching	49

8: BROADBAND NOISE REDUCTION	57
Hum and Tonal Noise Reduction.....	62
Tonal Noise	70
Dialogue Denoising	73
General Denoising Tips	77
9: REMOVING INTERMITTENT NOISES AND GAPS	78
What's the Goal of Audio Repair?	78
Principles of Audio Repair.....	78
Using Spectral Repair in RX 4	83
Intermittent Noises.....	86
Audio Dropouts.....	90
General Audio Repair Tips.....	94
10: REMOVING CLICKS AND POPS	95
What's the Goal of Removing Clicks and Pops?.....	95
Principles of Removing Clicks and Pops.....	96
Using Declick in Rx 4.....	97
Analog Clicks.....	99
Digital Clicks	100
General Tips for Removing Clicks and Pops.....	101
11: REMOVING CLIPPING	102
What's the Goal of Removing Clipping?.....	102
Principles of Removing Clipping.....	102
Using Declip in RX 4	104
General Tips for Removing Clipping	107
12: REMOVING REVERB	108
What's the Goal of Removing Reverb?.....	108
Principles of Removing Reverb.....	109
Using Dereverb in RX 4	110
General Tips for Removing Reverb.....	112
13: EXPORTING AND DELIVERING AUDIO	113
What's the Goal of Exporting and Delivering Audio?.....	113
Principles of Exporting and Delivering Audio	113
Exporting and Delivering Audio in RX 4.....	113
General Tips for Exporting and Delivering Audio.....	115
14: SUMMARY	119
15: ABOUT THE AUTHORS	120

APPENDIX A: GETTING SET UP TO REPAIR AND RESTORE AUDIO	121
Equipment	121
Monitoring Audio	122
Transferring Media to the Computer	123
Recording from Analog Formats	123
APPENDIX B: GENERAL RX 4 TOOLS	126
Comparing Settings	126
Batch Processing.....	127
Waveform Statistics.....	128
EQ	128
Presets.....	129
Keyboard Shortcuts	129
APPENDIX C: REPAIRING THE INCLUDED AUDIO FILES.....	130
Example 1: Removing Broadband Noise from a Concert Recording	130
Example 2: Restoring an Historical Speech: Making Voice More Intelligible	132
Example 3: Cleaning up a Phone Interview with Declick and Spectral Repair	134
Example 4: Removing Clicks and Pops from a Concert on Record	137
Example 5: Removing Clipping from a Phone Interview	139
Example 6: Removing Guitar String Squeaks with Spectral Repair	140
APPENDIX D: TIPS FROM THE PROS.....	141
Bill Jackson	141
Steve Levine	141
Chris Shaw	142
Mike Thornton	142
Jason Graves.....	143
Adam Ayan.....	143
Bob Bronow	143

1: INTRODUCTION

In today's world, audio and video recordings can be made by almost anyone. From smartphones to sophisticated studios and sound stages, large amounts of media content are created daily. And as our world becomes increasingly and audibly congested, the rate of ruined recordings is rising in tandem. Human error, unexpected electrical or mechanical interference, and unwelcome intrusions from aircraft, cell phones, pets, people, and Mother Nature regularly impact even the most seasoned professional. Many times, it just isn't possible to record that "perfect take" over again, particularly when editing coverage of a live event, or working to meet budgets and deadlines.

Whether you're a professional or just getting started, you've probably ran into difficult audio situations like those mentioned above, and wished you could correct what seemed like an impossible dilemma. We hope this guide will help you understand the basics (and beyond) of audio repair and restoration and enable you to fix previously unusable audio.

INTENDED AUDIENCE FOR THIS GUIDE

If you don't know anything about audio repair and restoration, this guide is a great place to start. It will help you develop practical and effective methods to remove noise and fix audio problems.

Sure, we think you should use iZotope RX[®] 4 (www.izotope.com/rx) to repair and/or restore your audio. But we've learned so much from the audio community throughout the past 10+ years that we're happy to give something back in return: a guide that's useful for anyone that wants to learn more about audio repair and restoration. As a result, this guide can be freely copied or distributed for non-commercial purposes.

If you own RX 4 but don't fully understand audio repair and restoration, this guide will help you better understand the powerful tools at your disposal. Each chapter demonstrates many useful concepts that you can apply to your next piece of problematic audio.

If you own RX 4 and already know the basics of audio repair and restoration, this guide will show you new tricks and techniques that are possible in RX 4's modules.

For the most comprehensive learning experience, download a free 10-day trial of RX 4 at www.izotope.com/rx.

ABOUT THE 2014 EDITION

The 2014 edition of this guide has been revised and updated by the experts at iZotope HQ, based on years of research and consultation.

ADDITIONAL RESOURCES

If you're interested in exploring audio repair and restoration in greater depth, there are plenty of resources available. The iZotope YouTube channel (www.youtube.com/izotopeinc) has a number of audio repair and restoration tutorial videos aimed at anyone from the beginner to the advanced audio expert. Additionally, third-party training is available via the iZotope website. Learn more at <https://www.izotope.com/en/store>.

ABOUT IZOTOPE

iZotope is a research-driven audio technology company based in Cambridge, Massachusetts. Our award-winning products are used in more than 50 million countries by millions of people, from consumers to musicians to major film, TV, and radio studios. Learn more at www.izotope.com.

2: WHAT IS AUDIO REPAIR AND RESTORATION?

When you hear the words “repair” and “restoration,” you might be inclined to think of dusty vaults filled with aging master tapes and records. Some audio repair and restoration projects may indeed involve taking old recordings and reviving them, but the methods used are useful for a wider range of scenarios. Every time you record audio—whether at home, in the studio, or on location—there’s always the chance of encountering unexpected and unwelcome audio “guests.”

“Audio repair and restoration” is a phrase used to describe the various processes and techniques one can use to remove noise and other imperfections from sound recordings. When used correctly, these techniques can alleviate problems including:

- Ambient background noise
- Tape hiss
- Electronic interference such as hum and buzz
- Sudden background noises (coughs, ringing cell phones, etc.)
- Clicks and pops from older vinyl, shellac, or phonograph recordings
- Clipping in both the analog and digital domain

3: AUDIO REPAIR AND RESTORATION BASICS

DEFINING THE OUTCOME

The goal of good audio repair and restoration is to render the best possible sonic result with the least audible human intrusion. In essence, your intervention in the original recording should be transparent and not introduce new artifacts that distract the listener. Sometimes it's possible to solve an audio problem entirely, and other times it's about finding the right balance between reducing the problem and preserving the original audio.

It's useful to remember that no recording is truly perfect, and any statement as such is purely subjective.

In the early 1980s, for instance, when CD players became readily available and affordable, commercial tape vaults and archives turned into gold mines. But strangely, during the early days of CD restoration, whole armies of purists became outraged when record companies sought to change the character of certain revered recordings (no matter how old) from their original boxy quality and dull, woolly ambience. Today, we have fresher ears that seem to be more objective.

Whatever your tastes, and even as times and nostalgic aesthetics change, the basic intention of restoration should remain the same: render the best possible sound with the least obvious interference.

REPAIR AND RESTORATION TOOLS

Repairing and restoring audio typically involves working with the following types of processors:

- Denoisers are used to reduce and remove steady state background noise. “Steady state” means noise that is not changing. It might include constant ambient noise or tape hiss (referred to as “broadband” or “noisy” noise), or electrical buzz and hum (referred to as “tonal” noise because it typically exhibits recognizable pitches or harmonics). Denoisers can be based on FFT with thousands of bands, or a simple crossover with just a few bands, and are sometimes designed for a specific use case, such as vocals.

RX TIP • RX 4 includes a Denoiser that has adjustable thresholds in several bands with independent control for both tonal and noisy problems (it includes an envelope that may be used to shape the noise reduction curve). RX 4 also includes a Dialogue Denoiser, which is more suited for real-time noise reduction on spoken word or sung vocals within a mix.

- Declickers are used to reduce and remove intrusive clicks and pops. These can be caused by anything from dust and scratches on an old record, a CD skipping on playback, or even mouth clicks and lip smacks from a voiceover.
- Decracklers are closely related to Declickers, but are optimized to help reduce and remove a more continuous, quieter stream of clicks that blend together to cause what the human ear perceives as a general crackle.

TIP • Using a Decrackler before using a Denoiser is often a very effective way of dealing with surface noise recorded from vinyl or shellac records.

- Declippers are used to repair digital and analog clipping artifacts. These artifacts occur when overloading an A/D converter or over-saturating magnetic tape.
- Visual editing tools vary by manufacturer, but the basic premise combines visual representations of audio, via a waveform or a spectrogram, with tools allowing you to select and edit certain audio events rather than the entire file.

TIP • The “Understanding Spectrograms/Identifying Audio Problems” chapter will help outline the fundamentals of working with audio in this new, visual way, before we dive into the various tools in depth.

- Dereverbs, or dereverberation processors, are a new, cutting-edge technology, and are designed to remove or reduce reverberations from audio. They are particularly useful for dialogue editing and ADR matching, and allow the engineer to remove unwanted or distracting reverberations from dialogue recordings.

RX TIP • RX 4 Advanced Dereverb is one of several proprietary tools developed by iZotope.

With all of these tools available, you might wonder where to begin. There isn't a single “correct” order in which to use them—it all depends on the audio material you're restoring. Always begin with the most obvious or obnoxious audio problem that you can hear and identify. Then, depending on the audio, it may make sense to perform some processing tasks before others. For example, a loud hum, a heavy crackle, or severe clipping might at first prevent you from hearing and dealing with additional audio problems. Peeling away that first layer may make the next step more obvious to you. Don't be afraid to try out different combinations of the tools to get the result you want.

GENERAL RECOMMENDATIONS WHEN REPAIRING OR RESTORING AUDIO

We highly recommend that you educate yourself about the function of individual tools in your toolbox. Dedicated audio repair and restoration tools can do a fantastic and fairly autonomous job, but learning when, where, and to what degree of strength to use a specific tool can yield better, faster, and more transparent results.

It's also beneficial to establish your aim before setting out. Do you want to treat each file with individual care and attention, or would you rather define the most appropriate settings with which to batch process hundreds of files quickly?

RESTORATION QUICK TIPS

1. Back up your work. Always make a backup of the original audio file before you begin attempting to restore it. Depending on the tool, some edits become permanent once the file is saved, so it's always advisable to maintain a prior backup.

RX TIP • RX 4 allows you to save your work and unlimited undo history as an RX 4 document, which can prevent losing or overwriting work.

2. Keep the ears rested and the mind open. While doing audio restoration work, you'll likely spend a lot of time focusing on subtle details. Taking breaks will help you return with a fresh mind and see and hear the bigger picture.
3. Make multiple versions. Sometimes it helps to try doing the same audio repair more than once with different settings and then compare the results.

RX TIP • RX 4 has a great Compare Settings tool that helps A/B results as you go. Also, you may come back to a version you tried a few days earlier when you were tired, and now find it sounding worse than ever. This happens to all of us! See suggestion #2.

4. Keep detailed notes. This is invaluable, particularly when there are so many different methods for dealing with different audio problems. For forensics work, documentation is often a required deliverable.

RX TIP • Using RX 4 document files and saving module-specific presets can save you the trouble of writing out all of the parameters on a recall sheet as you would in the analog domain.

5. Back up your work—the first and last rule of any audio editing project! You never know when a hard drive, backup device, or original master might fail. Again, always back up your work!

THE TOOLS OF THE TRADE

In the following chapters, we'll briefly examine some of the essential audio repair and restoration tools. This isn't meant to be a comprehensive guide, but will hopefully give you some focused thoughts about the tools and their uses.

Every noise is different, so a certain element of trial and error will always remain. As you continue to learn by experimenting with different tools and processes, you'll be able to refine and optimize your techniques over time.

4: UNDERSTANDING SPECTROGRAMS / IDENTIFYING AUDIO PROBLEMS


As with medical diagnostics, the key to successful audio restoration lies in your ability to correctly analyze the subject's condition. This can be a life-long, never-ending quest—constantly honing the ear to distinguish the noises and audio events that need to be corrected.

To get started, it's important to identify the problems with your file and identify which tool(s) will give you the results you want. Let's briefly look at how to examine your audio using the spectrogram and waveform display tools, then consider how to identify audio problems using these displays.

WHAT'S THE GOAL OF USING A SPECTROGRAM?


The aim of any good visualization tool for audio repair and restoration is to provide you with more information about an audible problem. This not only helps inform your editing decisions, but, in the case of a spectrogram display, can provide new, exciting ways to edit audio—especially when used in tandem with a waveform display.

RX TIP • Use this special slider in RX 4 to blend between detailed spectrogram and waveform views.

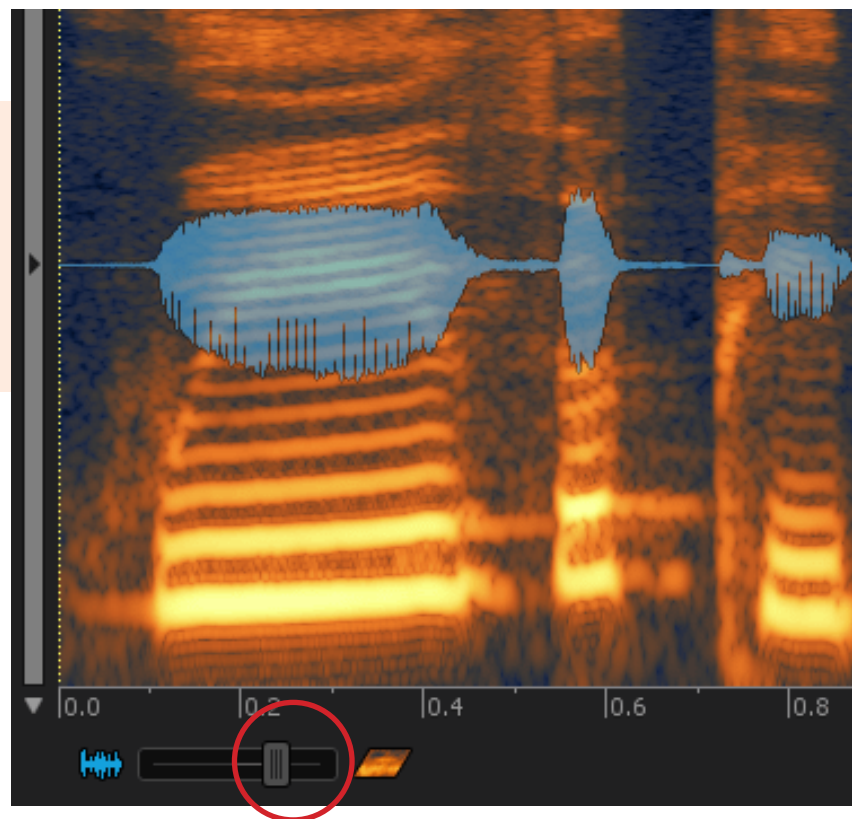


PRINCIPLES OF SPECTROGRAM DISPLAYS

So what is a spectrogram? A spectrogram is a very detailed, accurate image of your audio, displayed in either 2D or 3D. Audio is shown on a graph according to time and frequency, with brightness or height (3D) indicating amplitude. Whereas a waveform shows how your signal's amplitude changes over time, the spectrogram shows this change for every frequency component in the signal.

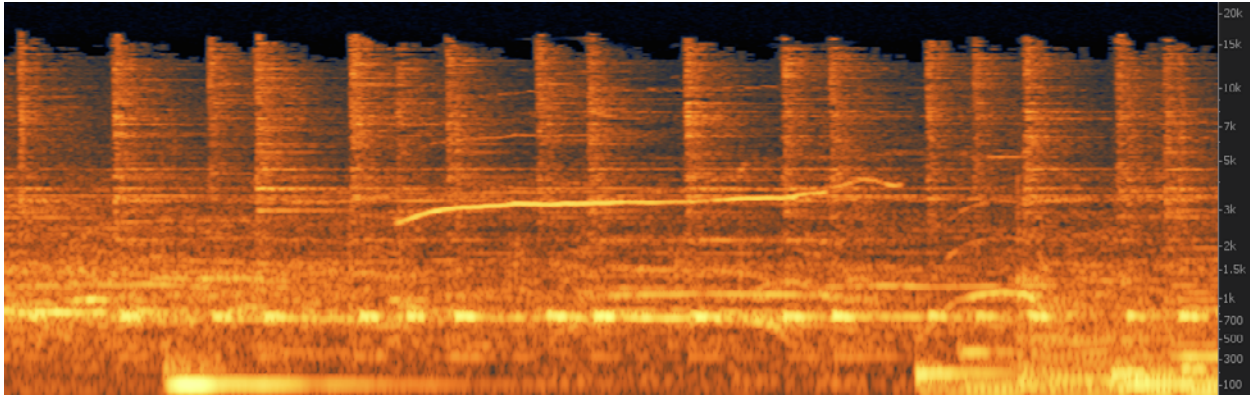


If you're used to using the waveform display, it may take a while to get your head around this unique way to "see" the audio. As a start, let's look at a few simple pieces of audio.

Here is a picture of a sine wave moving up in pitch from 60 to 12,000 Hz as seen using a waveform view.

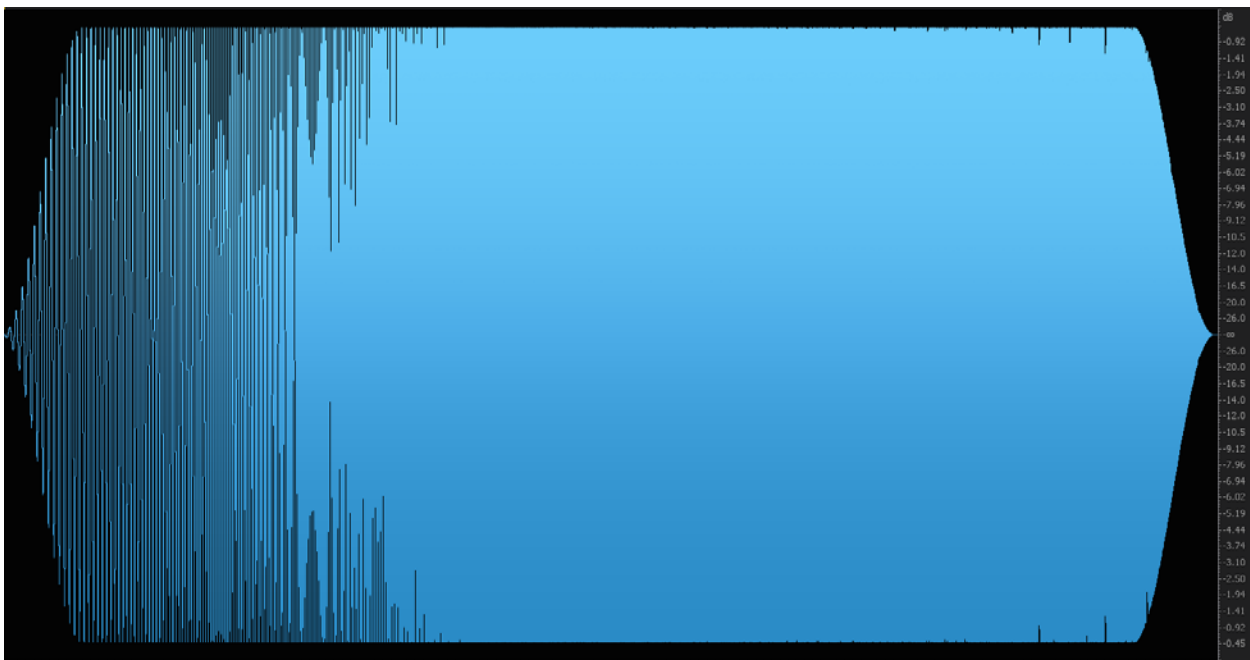


One thing you'll notice when looking at the waveform display is that it's good at showing audio amplitude, but less effective at showing what's happening at different frequencies. For example, we can easily see here that the sine wave is the same level for the entire duration of the file. However, we can't tell much about how the pitch or frequency changes over time. Now let's look at this same audio file using a spectrogram.

Now it's very obvious that the pitch of the audio is moving up! The horizontal axis shows time, just like the waveform display. But now, the vertical axis shows us frequency in Hz—the pitch of the event that's happening. We can see how loud events are by how bright the image is. The black background is silence, while the bright orange curve is the sine wave moving up in pitch.

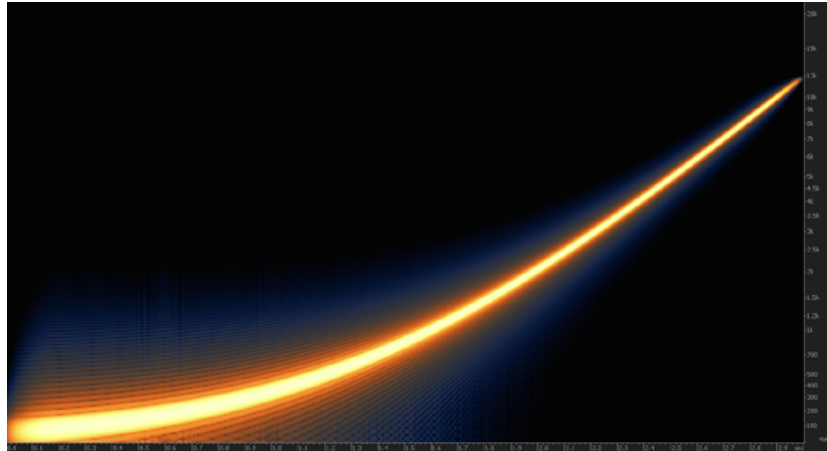


RX TIP • The blue/orange color map is optimized for easy sound identification, and is the default spectrogram color map in RX 4. In the spectrogram settings, you may change the color map based on personal preference.

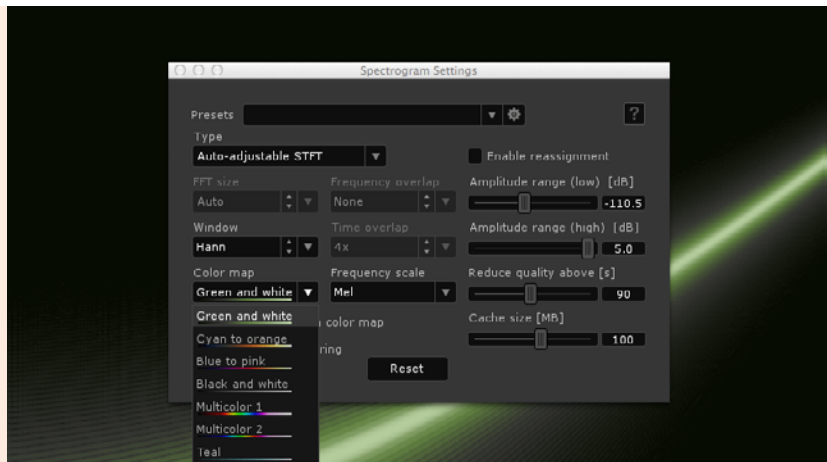


RX TIP • Using this color map slider, you can increase the brightness of the Spectrogram to make certain things easier to see.

Now let's look at something more complex: the human voice. Here's a short, spoken phrase as seen through a waveform display:

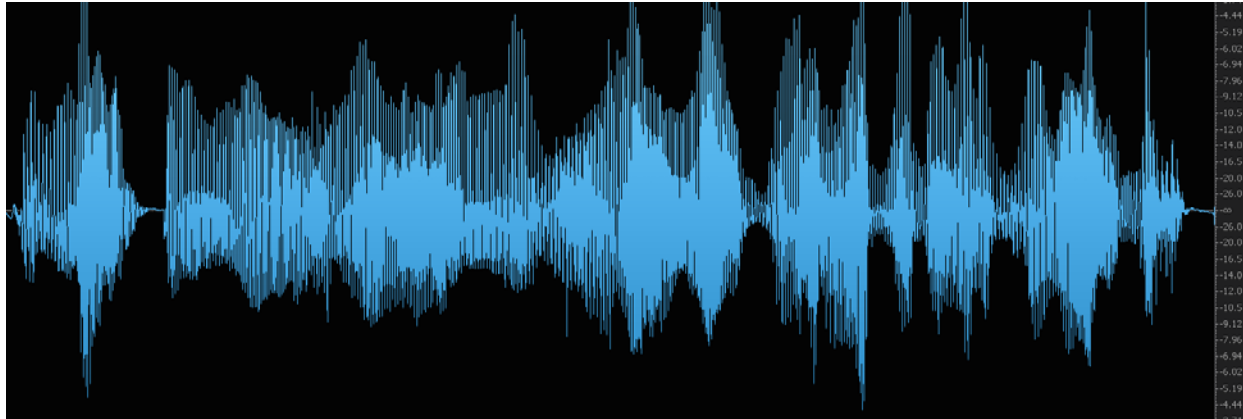

What we're seeing here is the amplitude of the spoken words over time. If we switch to the spectrogram view, we'll see many things we can't see in the waveform view:

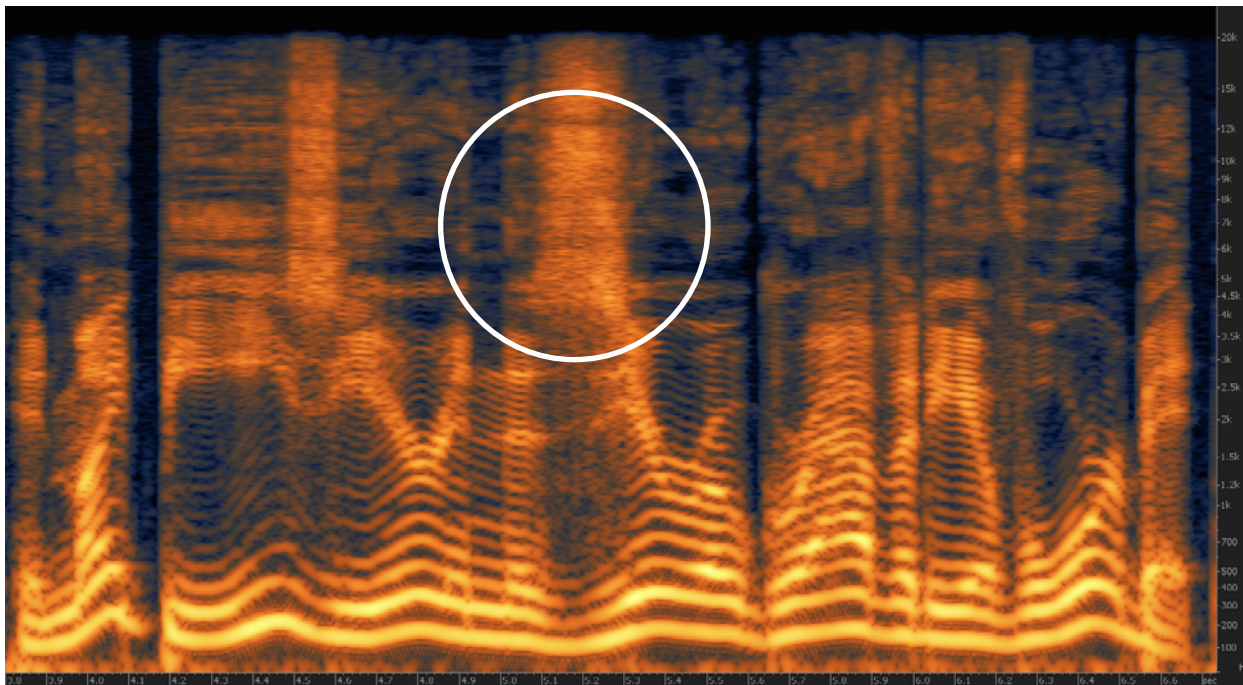


The human voice is much more complex than it might seem from looking at the waveform view. Each word is made up of a fundamental frequency (at the bottom of the spectrogram), harmonics that extend above that frequency, sibilance ("S" sounds) that begin or end words, and more. And of course, you can now see more clearly the noise that is surrounding the voice.

This is why having a detailed spectrogram display is so important to doing audio restoration. It helps you clearly see the problems that you're trying to fix.

SPECTROGRAM TYPES


Not all spectrograms are created equal. An algorithm known as the “Fast Fourier Transform,” or FFT for short, is used to compute this visual display. Many products that feature a spectrogram display allow you to adjust the size of the FFT, but what does this mean for audio repair and restoration? Changing the FFT size will change the way the algorithm computes the spectrogram, causing it to look different. Depending on the type of audio you're working with and visualizing, this may help. As a rule, higher FFT sizes give you more detail in frequencies (frequency resolution), while lower FFT sizes give you more detail in time (time resolution).

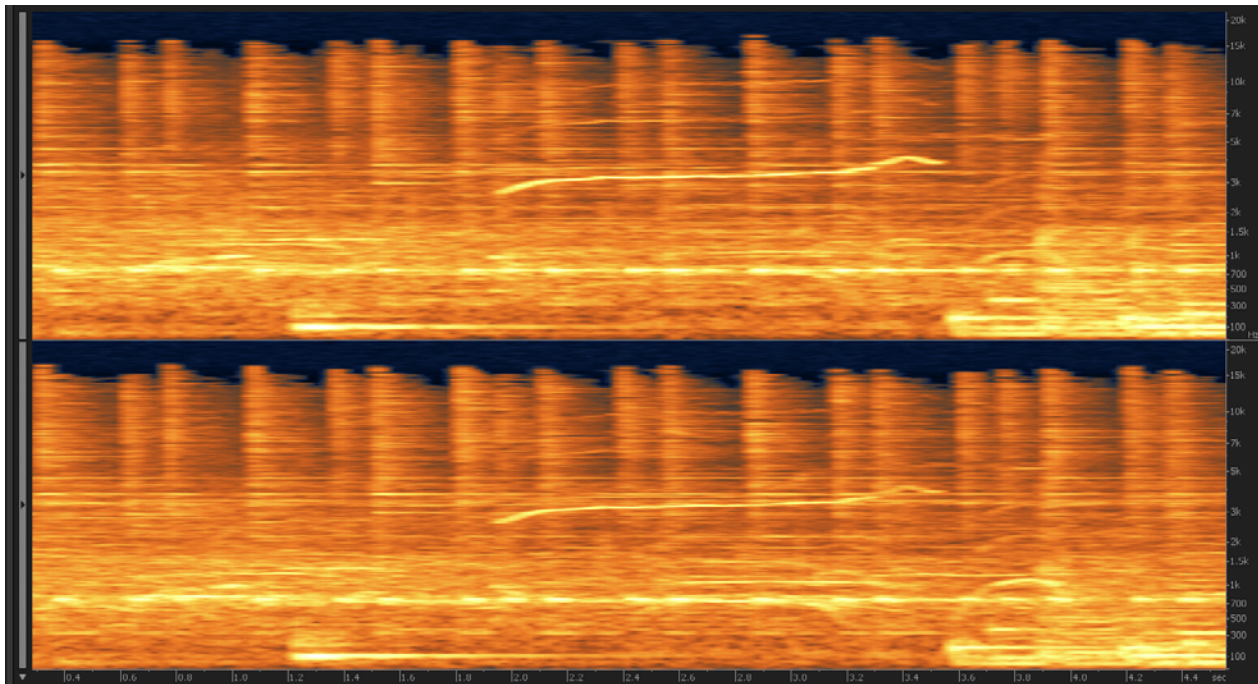

If you're trying to identify a plosive, mic handling noise, or other muddy low-frequency information, a higher FFT size in your spectrogram settings will help. If you're trying to identify a high frequency event, or working with a transient signal (such as a percussion or drum loop), choose a lower FFT size.

The following image is of a drum loop in a live concert setting, with a member of the audience whistling. You can see how the different FFT sizes affect the way we see high vs. low frequencies, as well as transients vs. sustained notes.

RX TIP • RX 4 has an Auto Adjustable mode that automatically combines different FFT sizes on different areas of the frequency spectrum, so it's always easy to see everything that's going on.

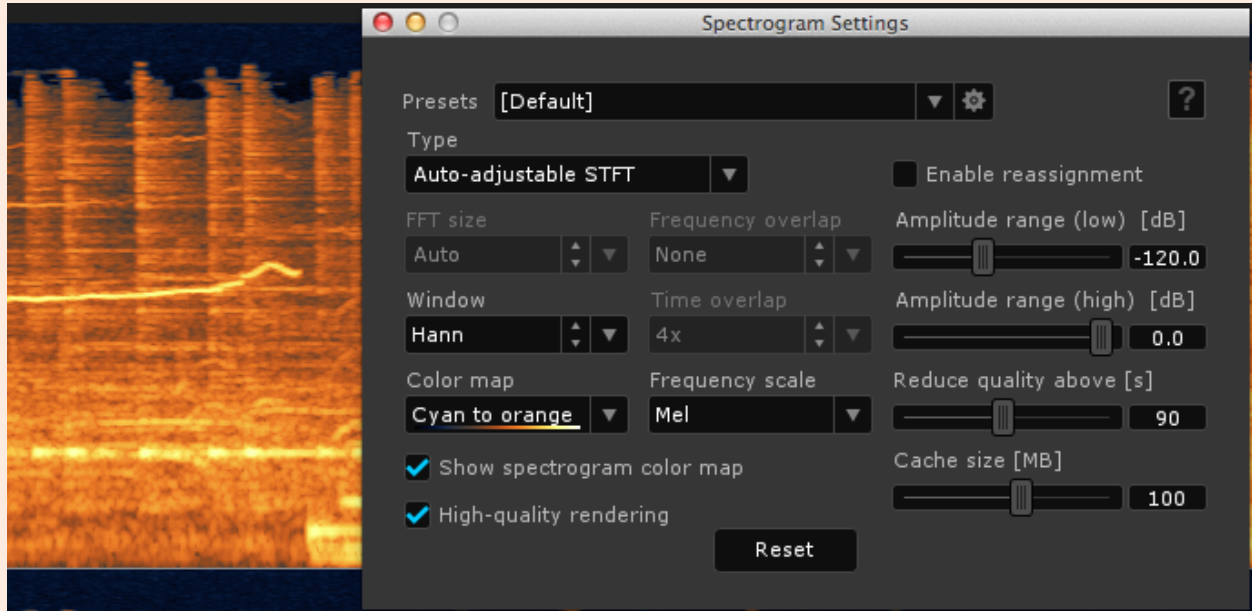


Now we'll move on to some specific examples of how to visually identify noise and other audio problems. Learning to identify these problems by sight will greatly help you—it means you'll be able to use any software that includes spectrogram technology.


USING A SPECTROGRAM TO IDENTIFY AUDIO PROBLEMS

Hum

Hum is usually the result of electrical noise somewhere in the recorded signal chain. It's normally heard as a low-frequency tone based at either 50 Hz or 60 Hz depending on whether the recording was made in North America or Europe. If you zoom in to the low frequencies, you'll be able to see hum as a series of horizontal lines, usually with a bright line at 50 Hz or 60 Hz and several less intense lines above it at harmonics. See the example below:

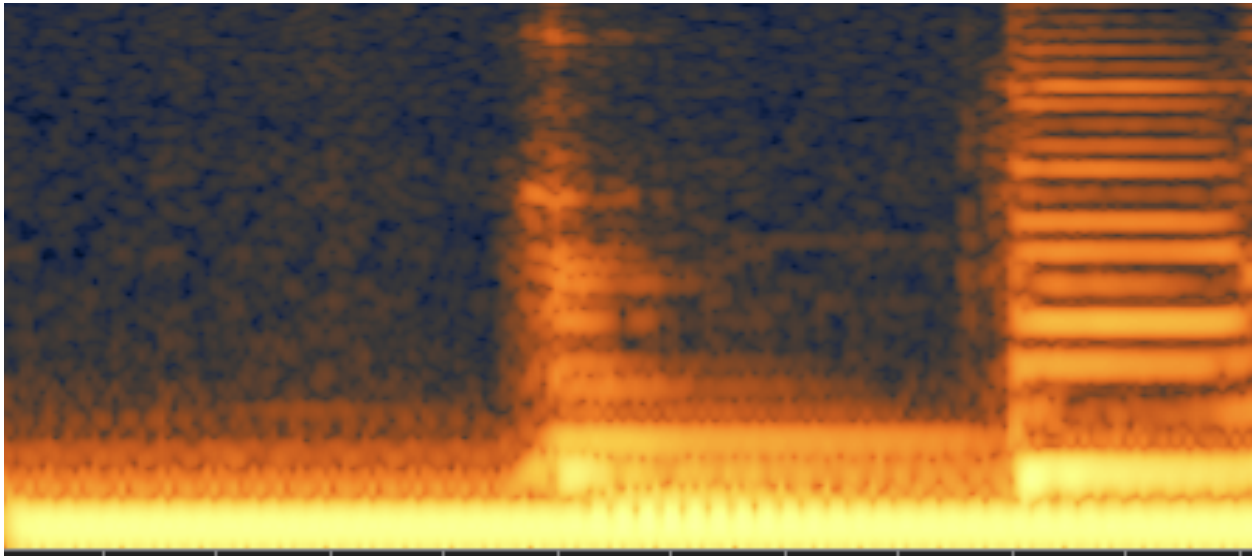


RX TIP • To zoom in on the spectrogram with RX 4, you can scroll the mouse wheel, or use the magnifying glass tool.

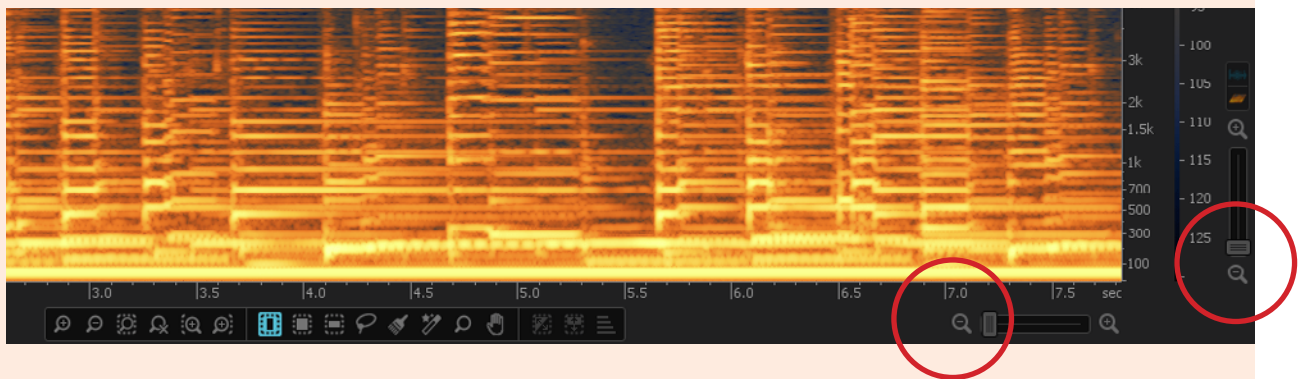

TIP • Hum Removal is ideal when frequencies of hum do not overlap with any transient useful signal.

Buzz


In some cases, electrical noise will extend up to higher frequencies and manifest itself as a background buzz. See the example below:

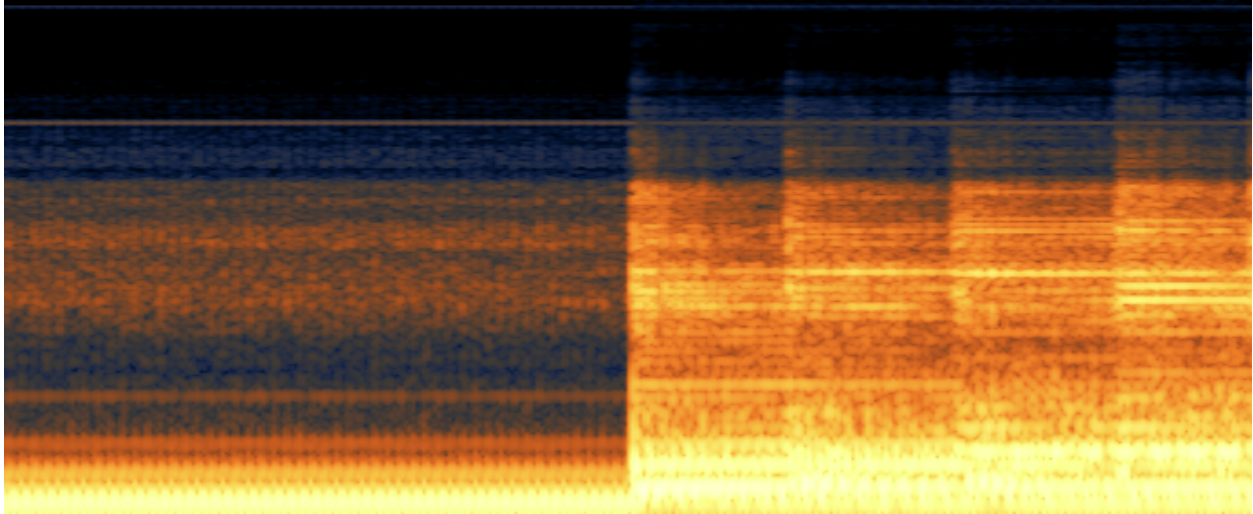

TIP • Hum-removal tools usually focus on low-end hum, so when the harmonics extend to higher frequencies, a denoiser is more effective at removing the problem.

Hiss and other Broadband Noise


Unlike hum and buzz, broadband noise is spread throughout the frequency spectrum and isn't concentrated at specific frequencies. Tape hiss and noise from fans and air conditioners are good examples of broadband noise. In a spectrogram display, broadband noise usually appears as speckles that surround the program material. See the example below:

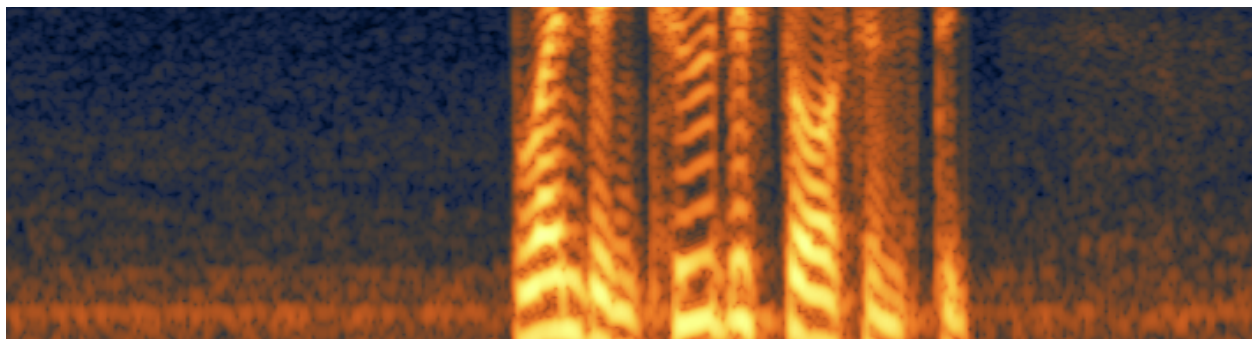

TIP • Denoisers are very effective at dealing with this type of broadband noise.

Clicks, Pops, and Other Short Impulse Noises

Clicks and pops are common on recordings made from vinyl—but can also be introduced by digital errors, including recording into a DAW with improper buffer settings, or making a bad audio edit that missed a zero crossing. Even mouth noises such as tongue clicks and lip smacks fall into the clicks category. These short impulse noises appear in a spectrogram as vertical lines. The louder the click or pop, the brighter the line will appear. The example below shows clicks and pops appearing in an audio recording transferred from vinyl:

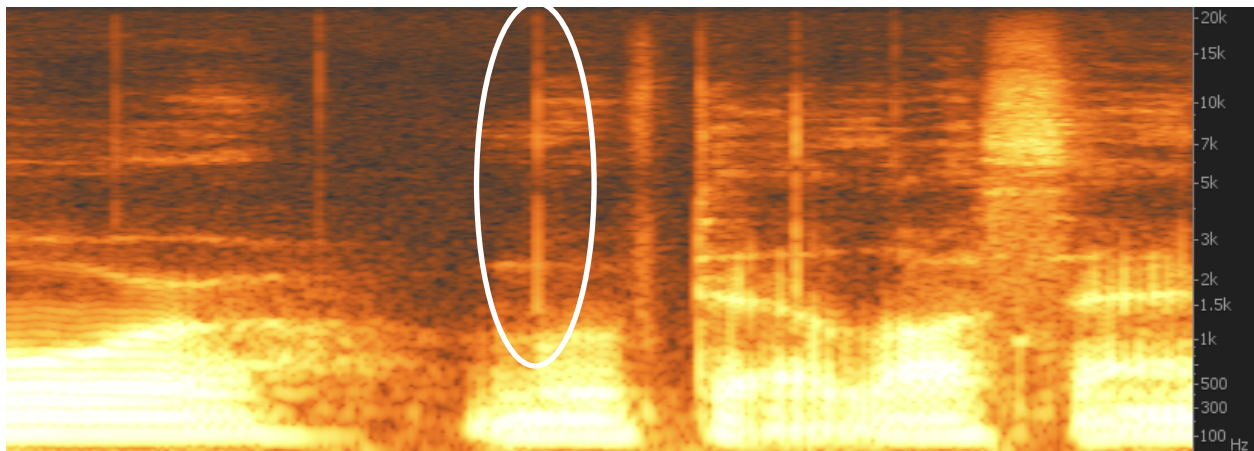


TIP • Declicking tools can recognize, isolate, then reduce and remove clicks such as these.

Clipping


Clipping is an all-too-common problem. It can occur when a loud signal distorts on input to a sound card/ converter, mixing console, field recorder, or other sound capture device. A spectrogram is not particularly useful for identifying clipped audio—for this you'll want to work with a waveform display.

RX TIP • Move the slider below the spectrogram to the left to superimpose the waveform display.

As you'll see in the image below, the clipping appears as “squared-off” sections of the waveform.

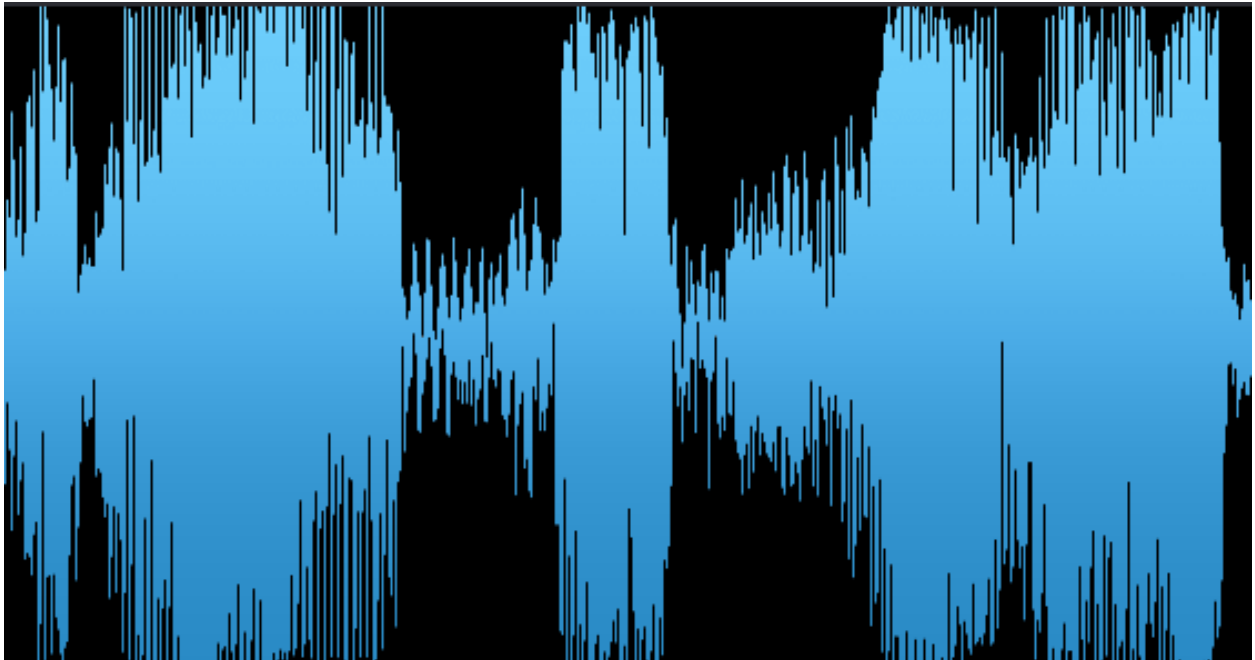

Many software programs allow you to zoom in on a waveform and see in detail where the waveform has been truncated.


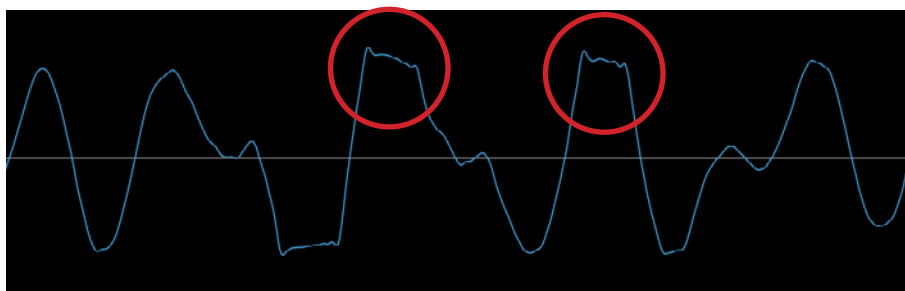


TIP • Declicking tools can intelligently redraw the waveform to where it might naturally have been if the signal hadn't clipped.

TIP • Sometimes, heavily limited audio will also appear “squared off” when zoomed out, but this doesn't necessarily mean it will sound as heavily distorted. You can zoom in to see if individual waveform tops are clipped.


Intermittent Noises

Intermittent noises are different than hiss and hum—they may appear infrequently and may not be consistent in pitch or duration. Common examples include coughs, sneezes, footsteps, car horns, ringing cell phones, etc. The images below represent two different examples of these noises:

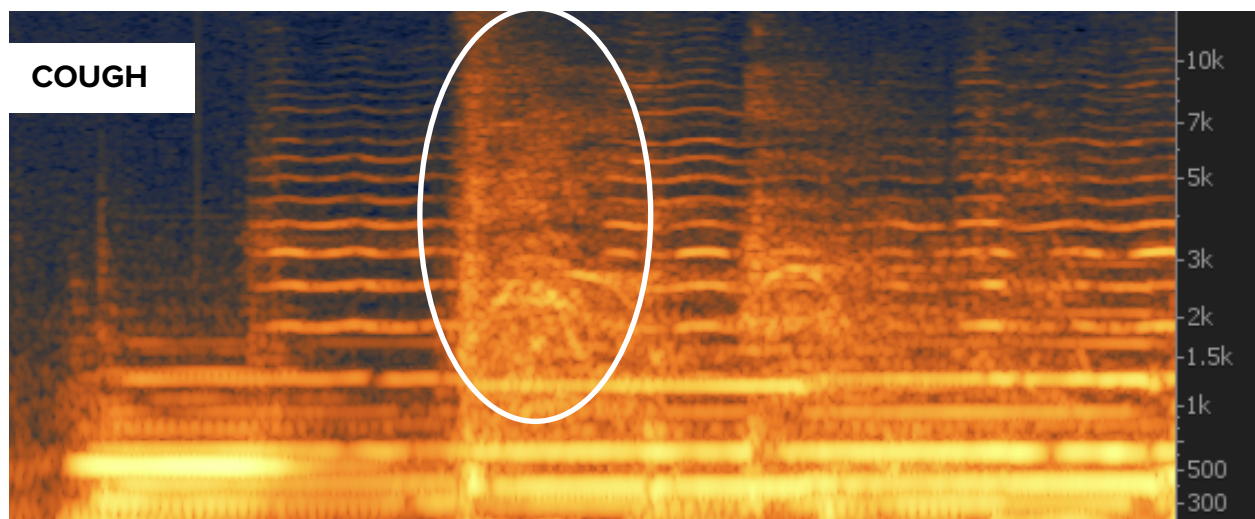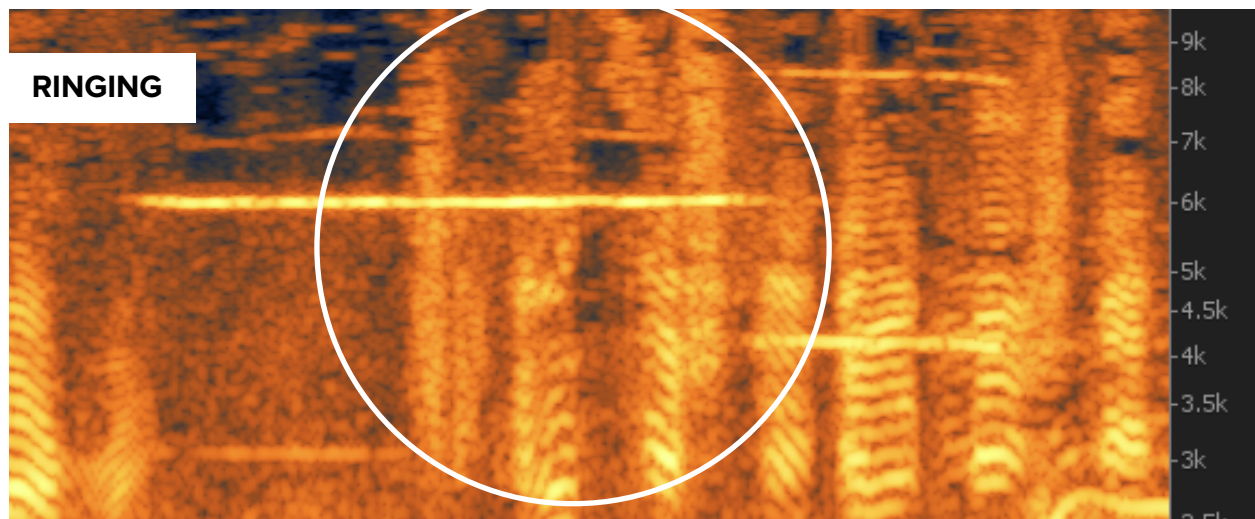

Gaps and Drop Outs

Sometimes a recording may have short sections of missing or corrupted audio. These are usually very obvious to both the eye and the ear! See the example below:

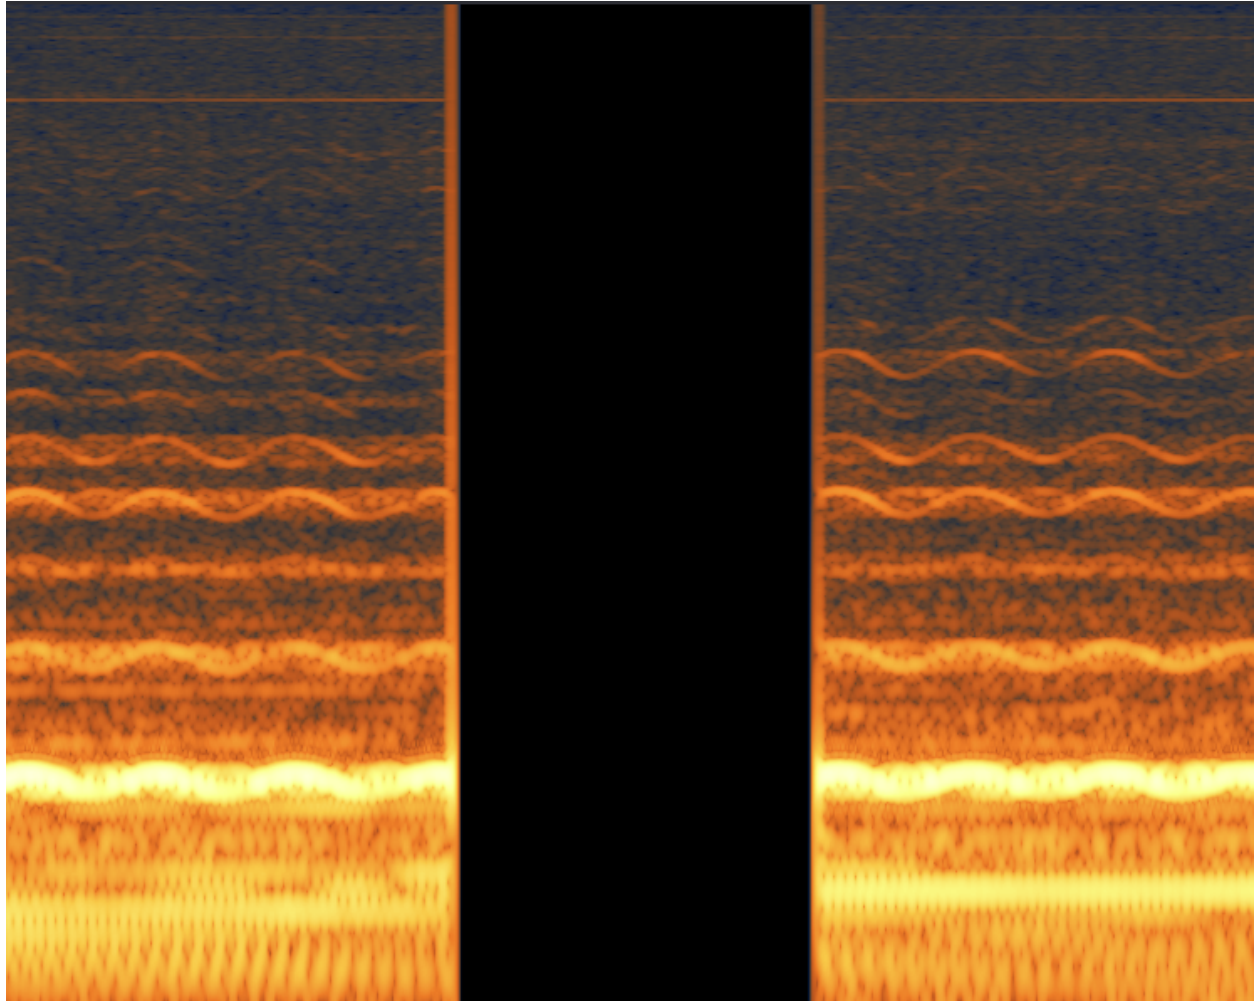

TIP • Noises and dropouts like the example above are often unpredictable, and usually need to be removed or patched manually using a visual/spectral editing tool.

5: WHAT IS RX 4?

As we explore the various ways one can approach audio repair and restoration, we'll be using iZotope RX 4 to demonstrate key concepts and showcase some unique tips and tricks.

RX 4 is a complete audio repair and restoration suite, consisting of both a standalone audio editor and software plug-ins for use within a DAW. RX 4 offers advanced visual representations of your audio and innovative new processing technology that removes noise and repairs audio. Its unique workflow features are designed to help you get great-sounding, efficient results even when working on challenging projects.

WHAT CAN RX 4 DO?

RX 4 combines familiar visual selection tools with a visual spectrogram display and advanced audio processing, enabling you to perform powerful audio edits. For example:

- Reduce both ambient and signal-based background noises such as hiss, hum, and buzz—without sacrificing the fidelity and clarity of the original audio.
- Isolate and then reduce or accentuate specific audio events, such as sudden background noises.
- Replace damaged or missing sections of an audio file with seamless, natural-sounding patches.
- Eliminate pops, clicks, and mouth noises without audible artifacts.
- Repair audible analog and digital clipping with perfect precision.

WHERE CAN I USE RX 4?

As a standalone software editor and plug-in suite, RX 4 is ideal for performing both real-time processing and offline editing in various audio workflow situations. Such use cases include post-production mixing for broadcast (TV, radio, web), audio mixing and mastering, audio restoration and archiving, digital audio forensics, and any other scenario that demands flawless audio delivered in a timely manner.

6: DENOISING

“Denoising” in the context of audio typically refers to the reduction or removal of steady-state background noise. As explained in an earlier chapter, steady-state noise might include constant ambient noise, tape hiss, or electrical buzz and hum.

WHAT’S THE GOAL OF DENOISING?

There are many situations where removing steady-state background noise can greatly improve the quality of the material.

Removing steady-state noise can improve the overall listening experience, increase intelligibility in dialogue tracks, remove interferences like electrical hum from a musical performance, and make it easier to combine different audio files into one scenario when mixing sound for picture.

However, there are other considerations, too. If the noise carries a lot of low frequency information (often described as rumble, hum etc.), reducing this can improve headroom and open up a musical or post-production mix to greater dynamic range and mixing possibilities.

PRINCIPLES OF DENOISING

Denoisers are one of the most commonly used tools in audio repair and restoration. They work by first taking a sample of the noise’s frequency spectrum, either manually or automatically, referred to as a “noise profile.” This noise profile is then used to distinguish between the desirable (and usually much more variable) audio, and the steady, undesirable background noise. As the algorithm identifies and separates the noise from the desired signal, the level of the noise is then intelligently suppressed. The user is able to control the level of noise reduction applied, as well as certain parameters affecting how the noise reduction works.

TIP • These additional parameters will vary by product and by manufacturer. Try downloading a trial or listening to demonstrations online to find the best fit for you! For instance, more information on iZotope RX 4 can be found at www.izotope.com/rx, or via our YouTube channel, www.youtube.com/izotopeinc.

There are a number of denoising tools available, both software (such as iZotope RX 4’s Denoiser and Dialogue Denoiser) and hardware.

When denoising, there are some universal truths that apply regardless of the type of background noise or the tool you’re using:

1. Reduce > Remove. Often, if the goal is to improve the listening experience or increase headroom, the best result isn't necessarily obtained by attempting to remove the noise entirely. Rather, reducing the noise to an acceptable or indistinguishable level often yields better results.
2. Doing multiple, gentle processes will often yield a more natural result than one harsh process of denoising. Though you do need to relearn the new noise before each processing pass, this softly-softly approach allows the Denoising tool to more easily reduce noise without affecting the desirable signal.
3. You can often reduce tonal noise more heavily, and with fewer artifacts, than you can reduce broadband noise. Identify the type of noise(s) present in your signal, and keep this in mind when treating them.

RX TIP • The iZotope RX 4 Denoiser provides separate control over the tonal and noisy components in your noise profile. They are linked by default, which usually delivers the best results. There are use cases for delinking, however—like when trying to remove low-end amp buzz without reducing the high-end noisy shine the amp gives the guitar signal.



4. Applying different levels of noise reduction to different areas of the frequency spectrum can help reduce artifacts. For example, try applying more gentle processing to the high-mids than you would to the low-end, which usually contains less important audio information.

TIP • Denoisers with per-band parameter adjustments are designed to accommodate this workflow. RX 4 Advanced makes this available should you need it.

USING THE DENOISER AND HUM REMOVAL IN RX 4

There are some slight differences in the tools you may use to treat tonal versus broadband noise, which we'll investigate in a later chapter.

7: TIPS AND TRICKS FOR EDITING DIALOGUE

The process of recording, editing, and mixing dialogue for mediums such as radio, TV, and film is often challenging.

From news reports to reality TV, the current emphasis on field recording (made possible by advances in portable recording technology) also introduces audio problems such as distortion and background/ambient noise, to name a few.

These problems are by no means reserved for location-recorded dialogue. Automated dialogue replacement (ADR) is sometimes difficult to seamlessly blend into a scene, due to the lack of ambience or room sound, making it sound as if it doesn't fit. This issue is more pronounced with visual mediums, like TV and film, where we expect to hear certain elements that we see, in particular the ambience of a room.

This chapter lays out common audio problems specific to dialogue, and both conventional and unconventional ways RX can be used to solve these problems.

WHAT'S THE GOAL OF DIALOGUE EDITING?

For audio engineers and videographers alike, the goal is typically to focus on presenting the story in question by removing any distractions for the viewer.

An inconsistent dialogue mix can harm the immersive experience, as the audience suddenly pays attention to issues like mismatched volume, a sudden change in sound quality, or perhaps a big jump in the noise floor.

Maintaining a consistent viewing or listening experience can be particularly difficult when the dialogue transitions between different sources... such as a studio quality voiceover juxtaposed with audio from a camera microphone on a busy street for example.

TIPS FOR TACKLING DISTORTION


Distortion in dialogue recordings is often a consequence of a lack of headroom in the recording equipment.

Declicking tools (such as RX 4's Declip module) are usually the first tool to reach for, and can help treat both analog and digital clipping or overload distortion.

TIP • Read the “Removing Clipping” chapter for a more in-depth explanation of how Declicking tools work, and specific instructions on using Declip in RX 4.


Removing clipping may not remove the audible distortion entirely. For more serious issues, Decrackle and Deconstruct can help mitigate harmonic distortion, as demonstrated in Steps 2 and 3.

Step 1:

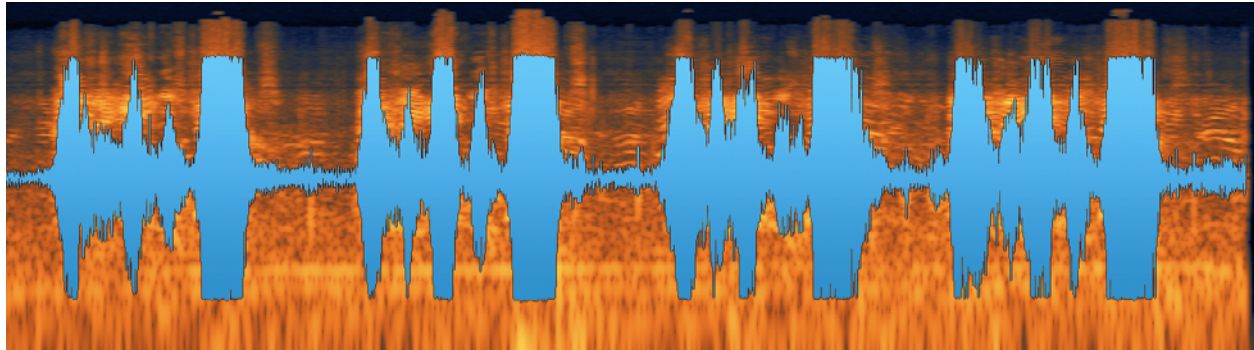


As seen above, the waveform is truncated.

Open Declip, and click Suggest. This sets the Threshold(s) just below the point of clipping.

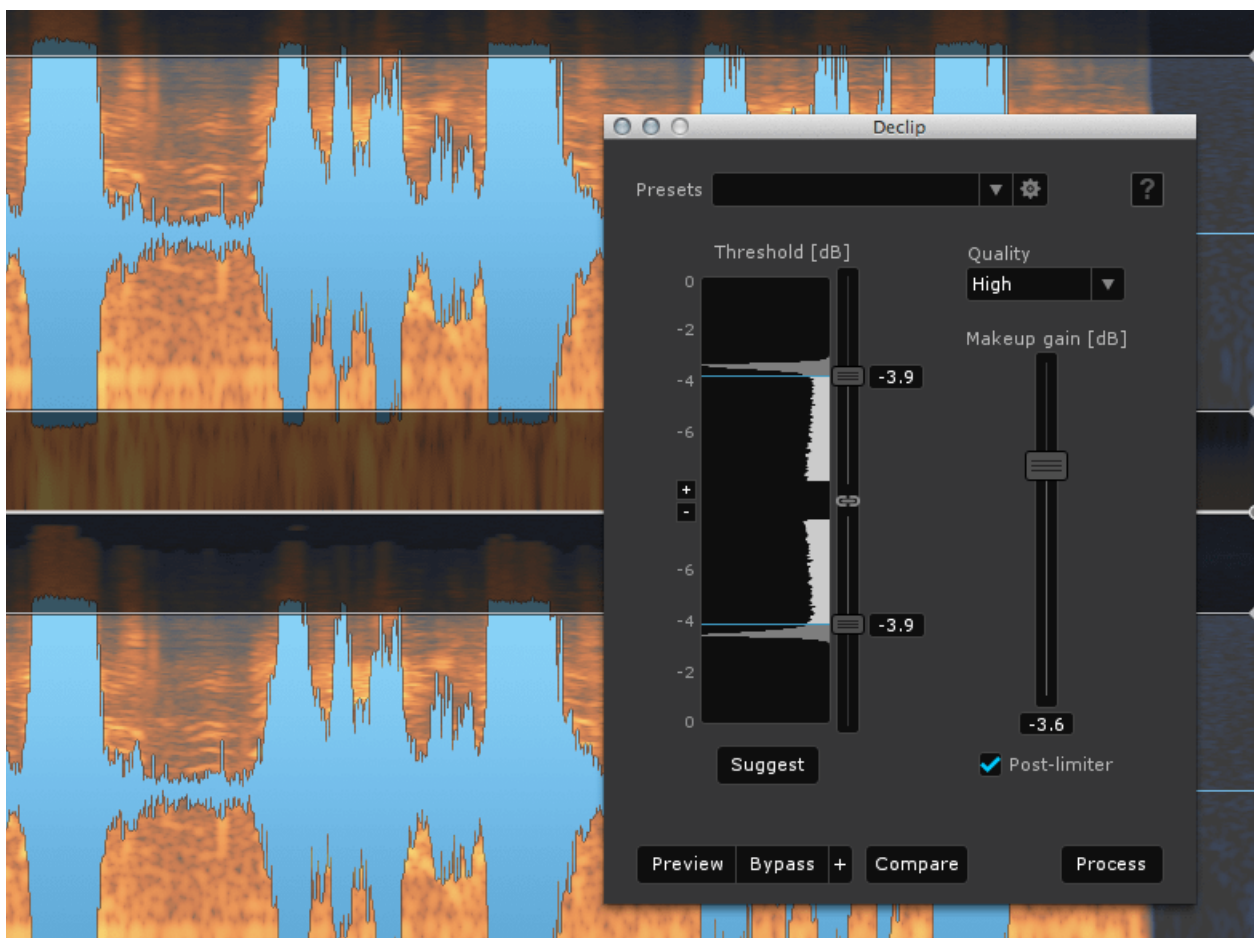


If the clipping occurs only on one side of the waveform, or perhaps is more serious on one side than the other, RX 4 Advanced can de-link the Threshold sliders. This helps obtain a better sound, by avoiding over-processing the side of the waveform with less clipping.

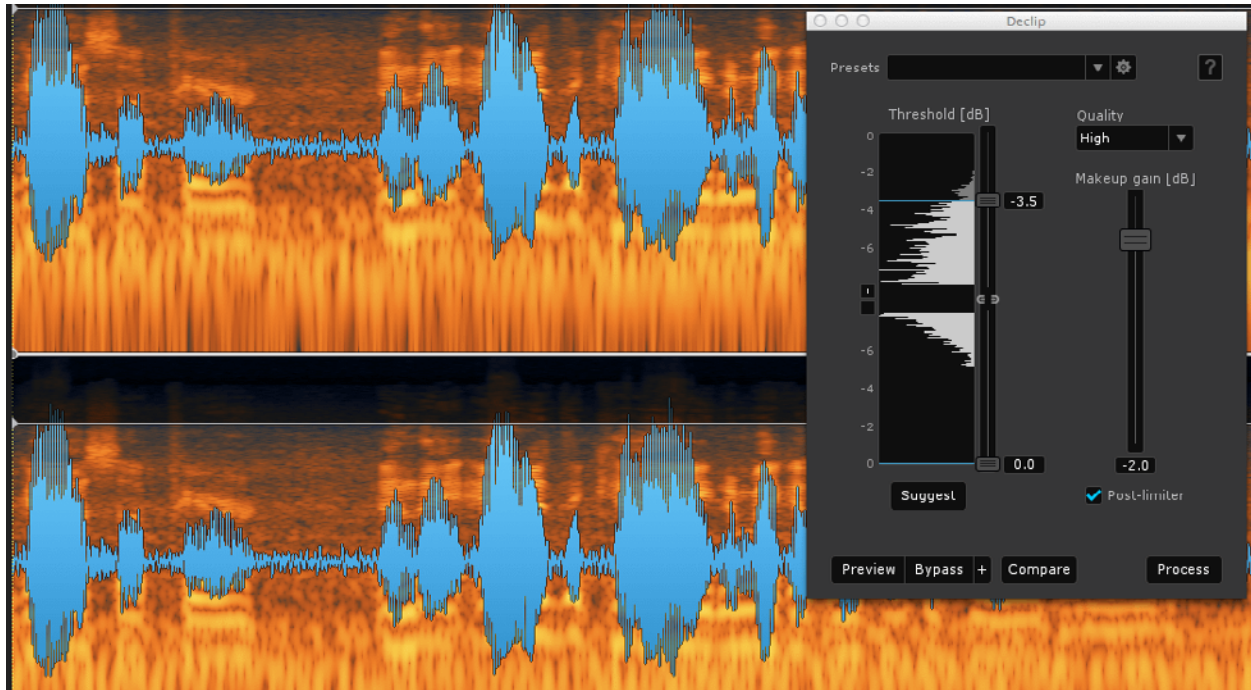


The negative Makeup gain and the Post-limiter assist in preventing the redrawn waveform from clipping again, which it otherwise is likely to do.

Click Process. The repaired audio now looks and sounds more natural.

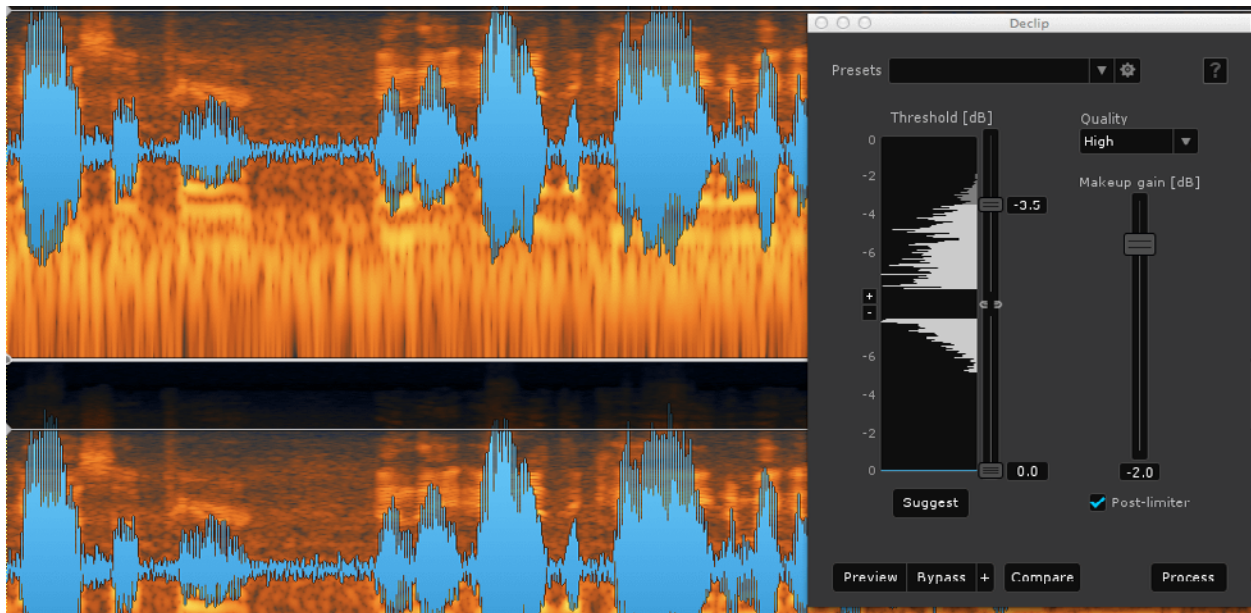


If distortion artifacts are still audible, and adjusting the Declip parameters doesn't achieve the desired result, move on to Step 2:

Step 2:

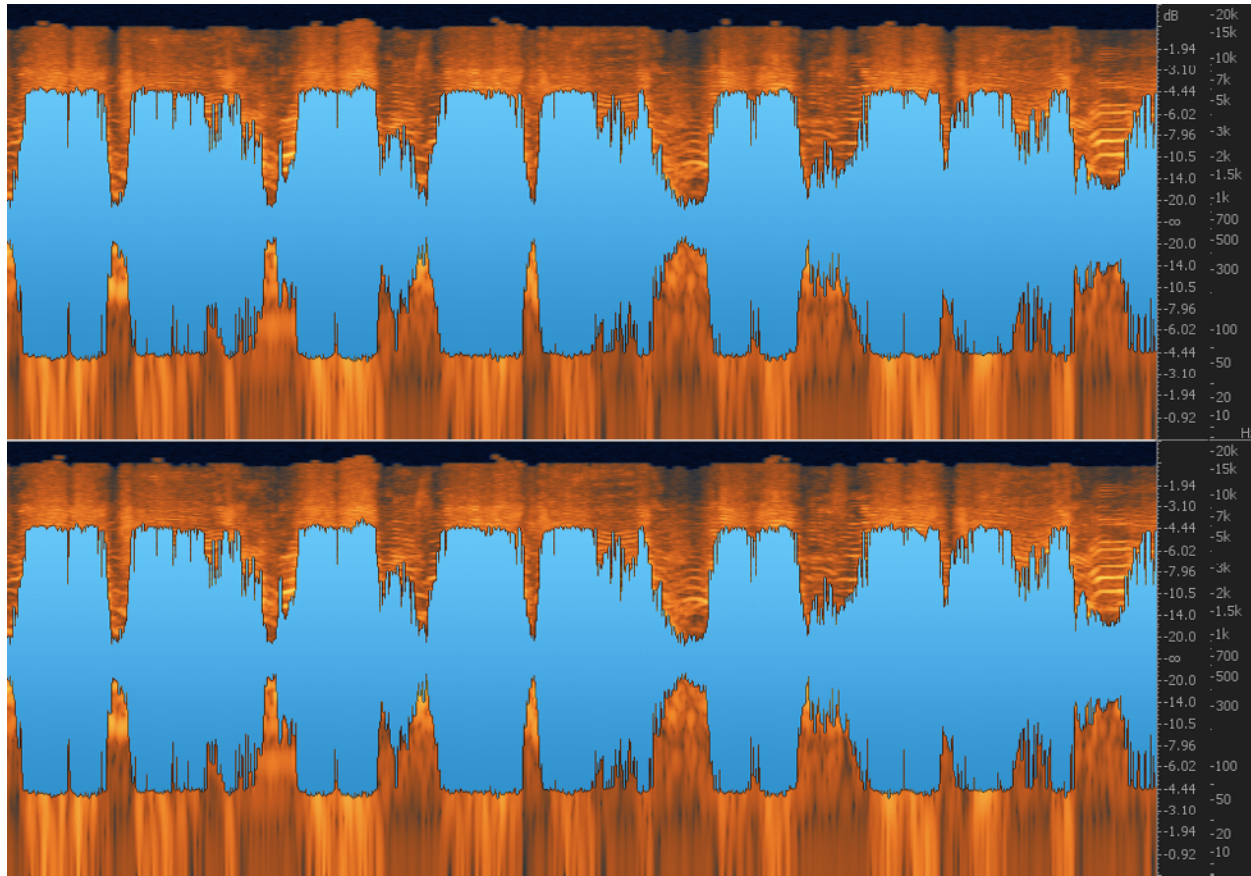


The above waveform was heavily clipped. Declip can repair the truncation, but will not fix the harmonic distortion that occurred in the high frequencies. The problem is hard to see visually, but easy to locate manually using the next step.

Use the Frequency selection tool combined with the Play frequency selection tool to sweep around until it's clearly audible where the problem is located.

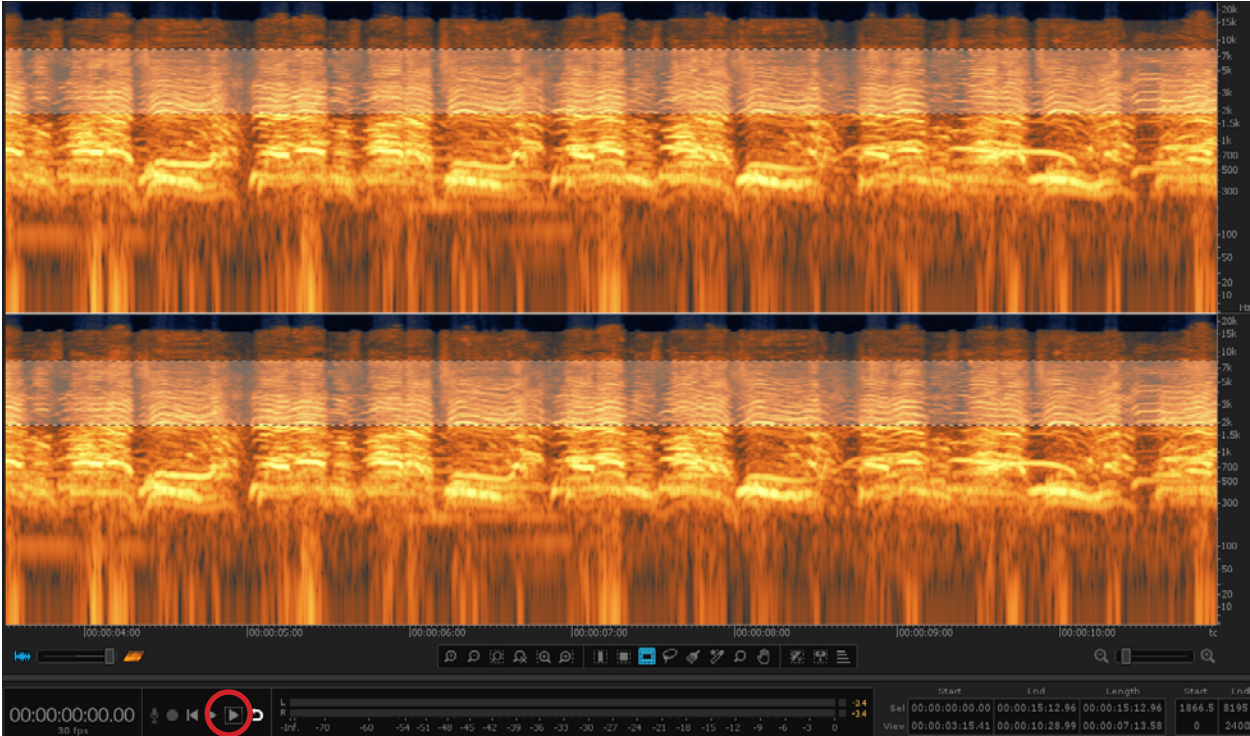

Open the Declick module, and select the Decrackle tab. Decrackle is designed to handle a more continuous stream of irregularities in audio that become blended together at lower amplitude levels, resulting in what we hear as crackle. This helps clean up the additional distortion artifacts.

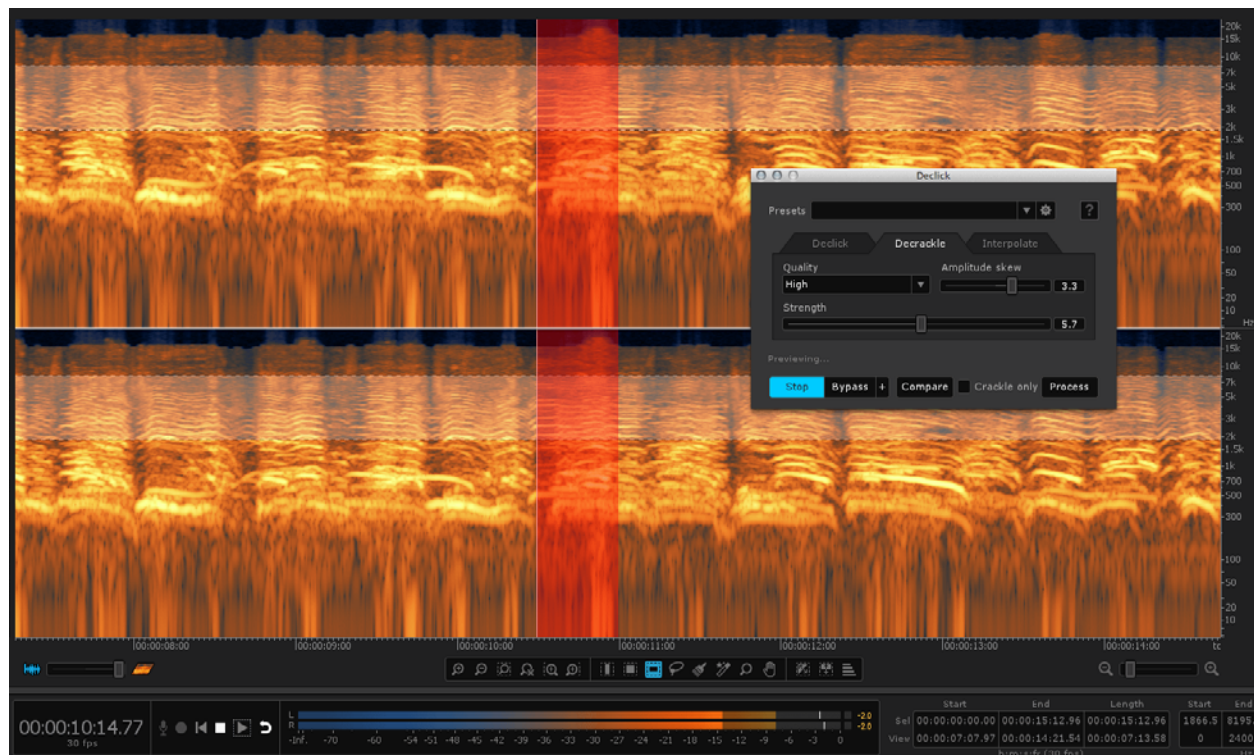

Make sure you still only have the specific frequency range selected, then click the Play button to audition the overall net sonic result.



Use an Amplitude skew greater than zero, and adjust the Strength parameter until you hear the problem diminish.

If the distortion is still audible, move on to Step 3.

Step 3:

Make the same or a similar frequency specific selection, and open the Deconstruct module (RX 4 Advanced only).

Deconstruct can adjust the levels of tones and noise independently. Since bad harmonic distortion in dialogue often manifests as noise in the high end, using Deconstruct to attenuate the noise in a frequency specific selection is the last step in helping reduce distortion.

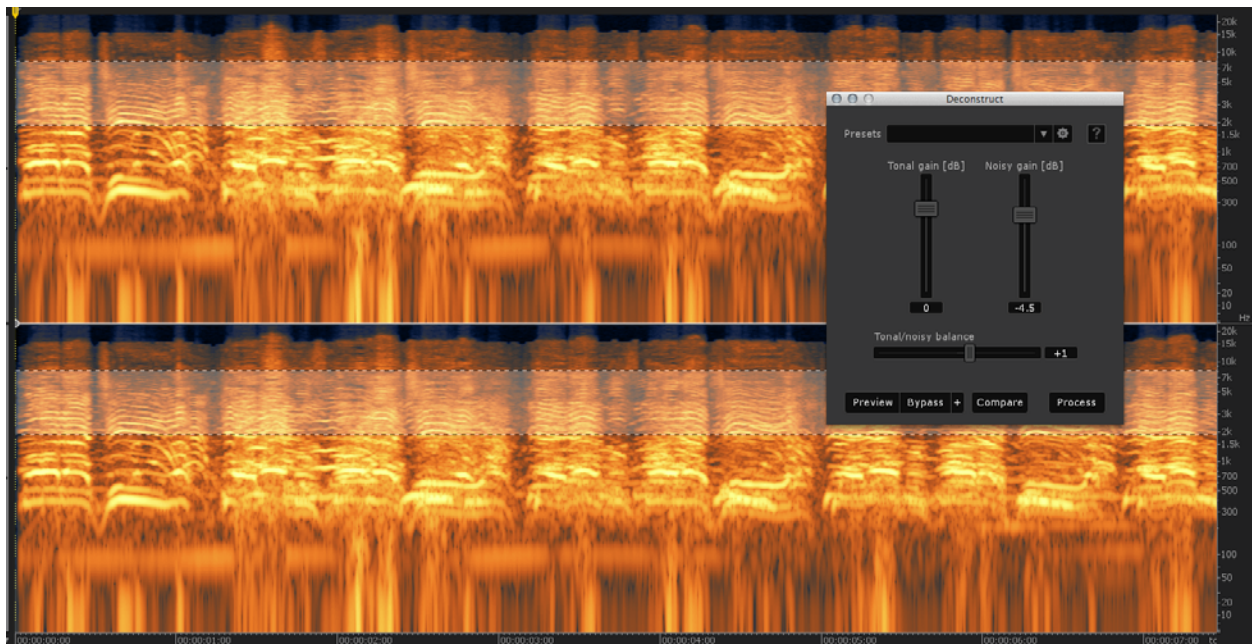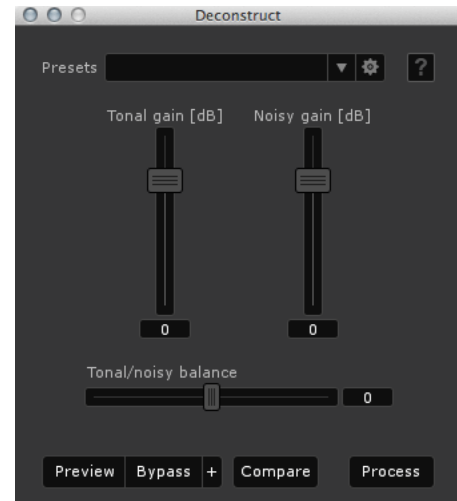

These three techniques are key to reducing distortion in dialogue recordings. They shouldn't necessarily all be done every time; rather, they should be used one after the other, if the preceding step didn't produce satisfactory results.


TIPS FOR TACKLING BACKGROUND NOISE (STEADY STATE)

Steady background noise in dialogue, if left untreated, is likely to create problems down the road when EQ and Compression are applied. Frequency boosts or cuts, and dynamic range adjustments can make the noise more noticeable.

Most types of interference, especially those that happen on dialogue recordings, can usually be tackled with RX 4's Dialogue Denoiser in Auto mode, which is the most efficient way to reduce noise.


TIP • Read the denoising chapter for a more in depth explanation of how Denoising tools work, and specific instructions on using Denoise in RX 4.

Step 1:

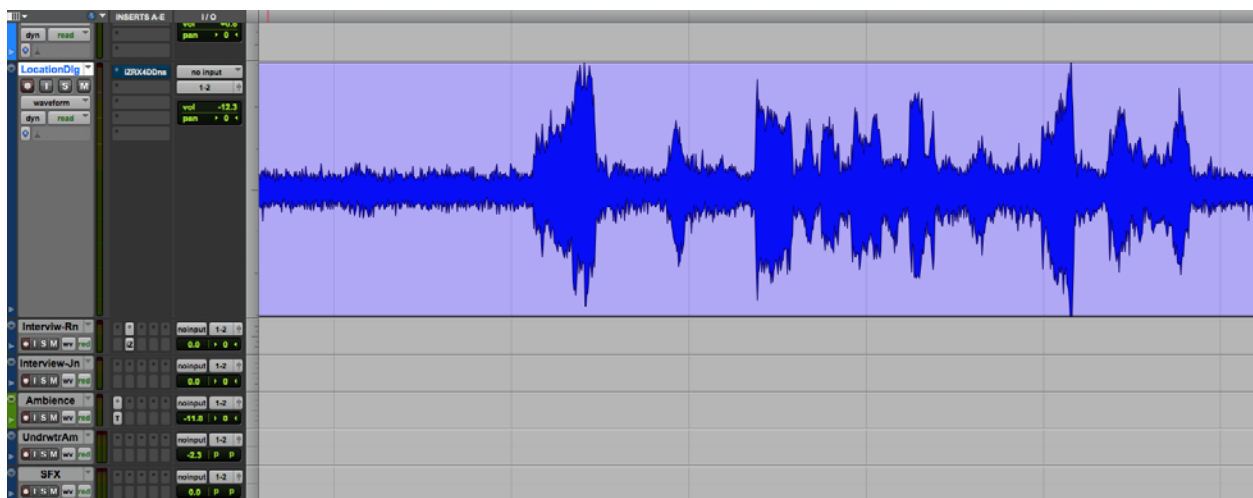


The above audio file contains a lot of background noise, which can be seen in the waveform in-between the vocal transients.

RX TIP • In the spectrogram, this type of background noise appears as the steady image in-between the speech fragments.

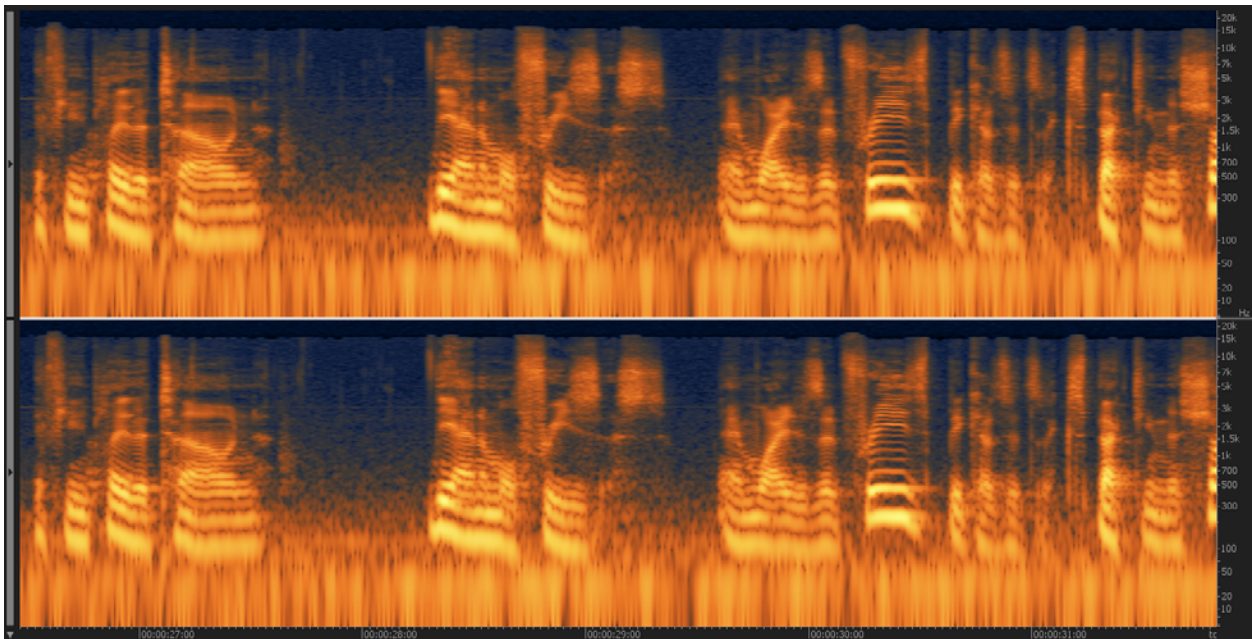


The quickest way to reduce this noise in the dialogue mix is to simply insert RX 4's Dialogue Denoiser as the first plug-in insert on the dialogue track.

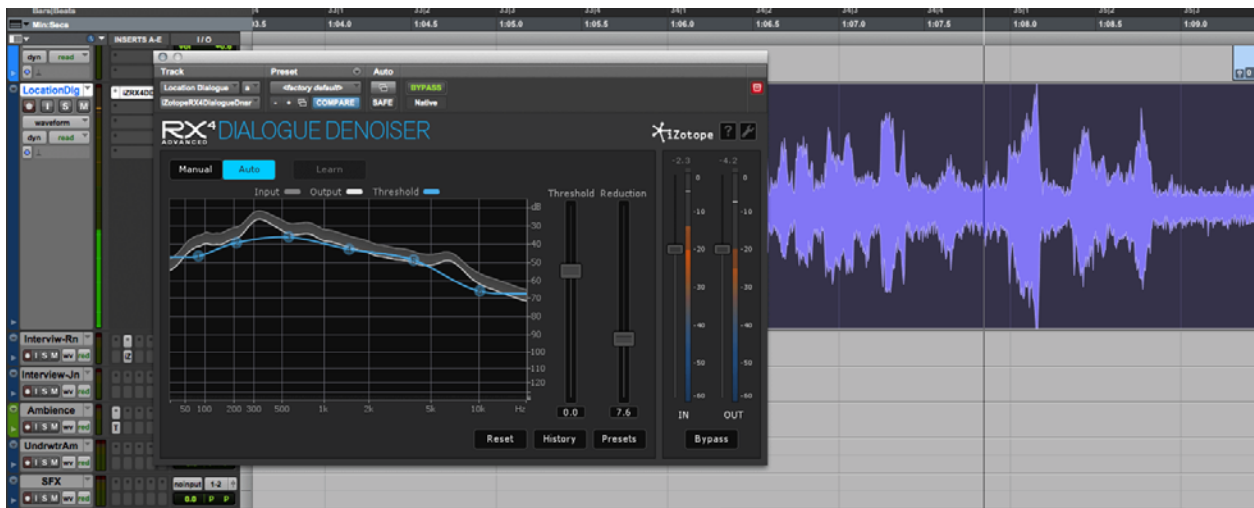

By default, this works in Auto mode and will instantly reduce the noise. As well as saving time, Auto mode also allows the Denoiser to react to changing noise profiles, which are common in audio recorded outside.

Setting it to Manual mode allows you to teach it a specific noise profile, and automate the strength of processing in different frequency areas, which may achieve a better sounding result.

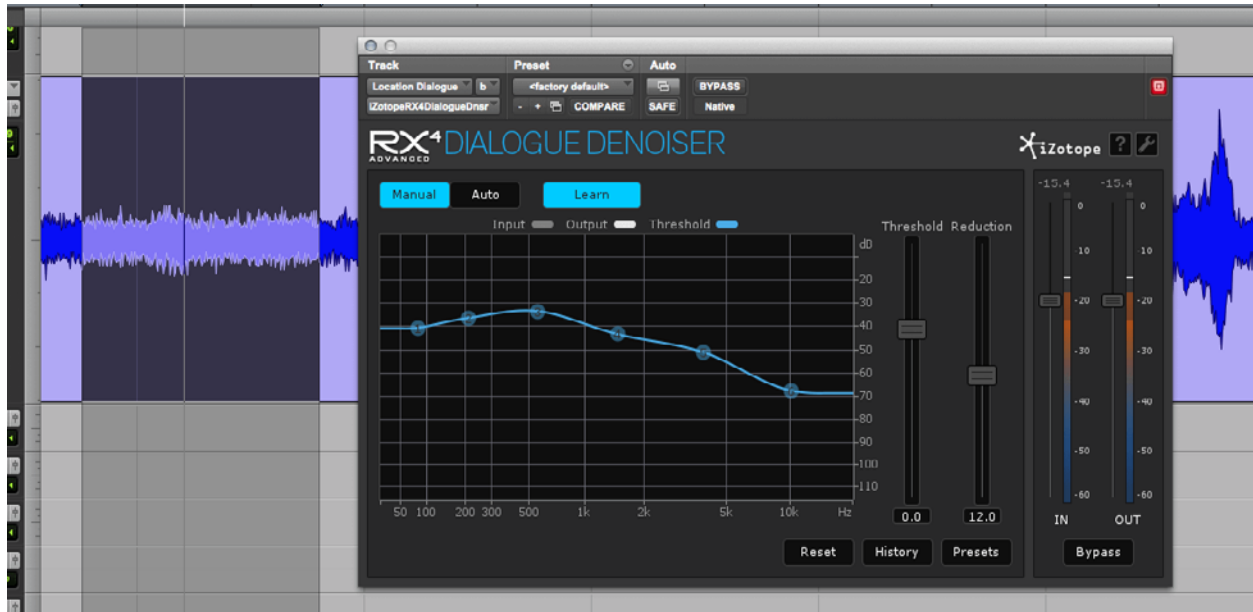


The advantage to reducing noise in this way is that it's non-destructive, so you can always go back and adjust the amount of noise reduction if you so choose later in the mix, rather than committing before you've had a chance to get any further in the mixing process.

RX TIP • For audio files with a lot of background noise, inserting two to three instances of Dialogue Denoiser with a gentle noise reduction setting of between 2 - 4 dB can sound more transparent than one instance set to 12 dB, for example.

If the background noise is severe, or contains strong tonal elements, such as hum and buzz, move on to Step 2.


Step 2:

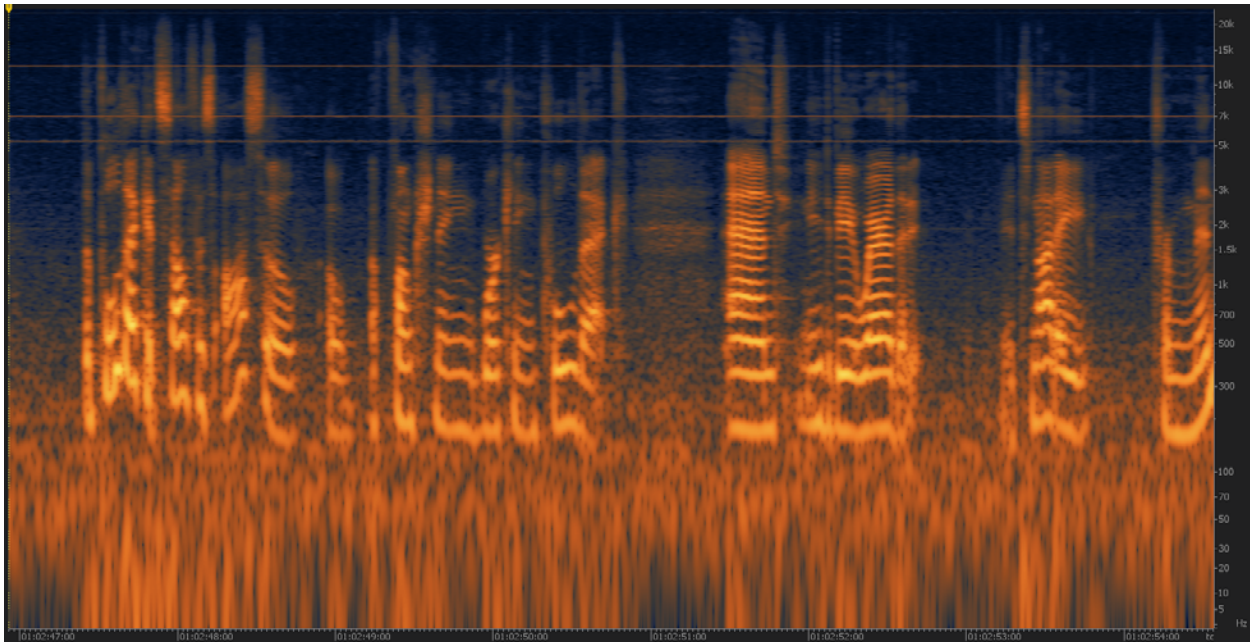


In this audio file, the background noise contains a lot of tonal elements that can be recognized as pitches or high-frequency buzz. This often comes from HVAC units and fluorescent lighting.

RX 4's Spectral Denoiser is well equipped to tackle these problems, which you should do inside RX 4 before re-importing the audio into your session.

RX TIP • RX includes a plug-in called RX Connect that can send and receive audio directly from your timeline to the RX standalone application for processing.

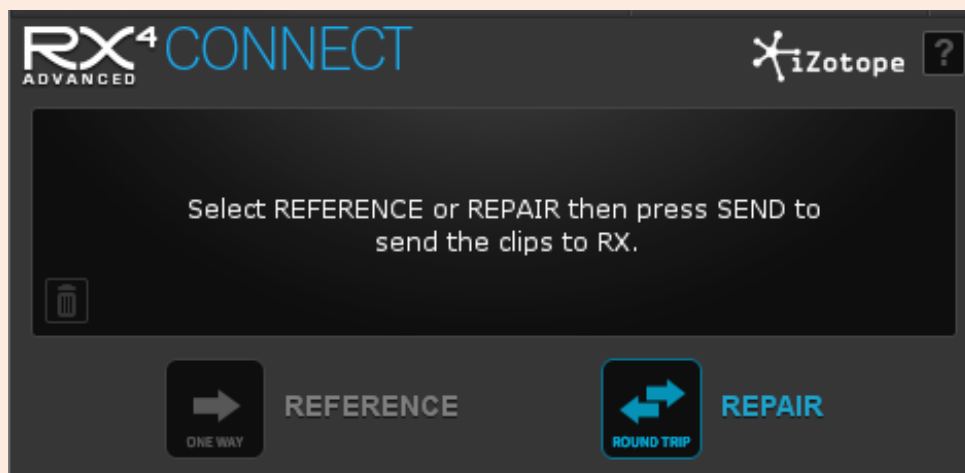

Open the Denoise module, and select the Spectral tab. In Manual mode, use the Learn feature to teach RX the noise profile. Adjust the amount of noise reduction as needed, and click Process.

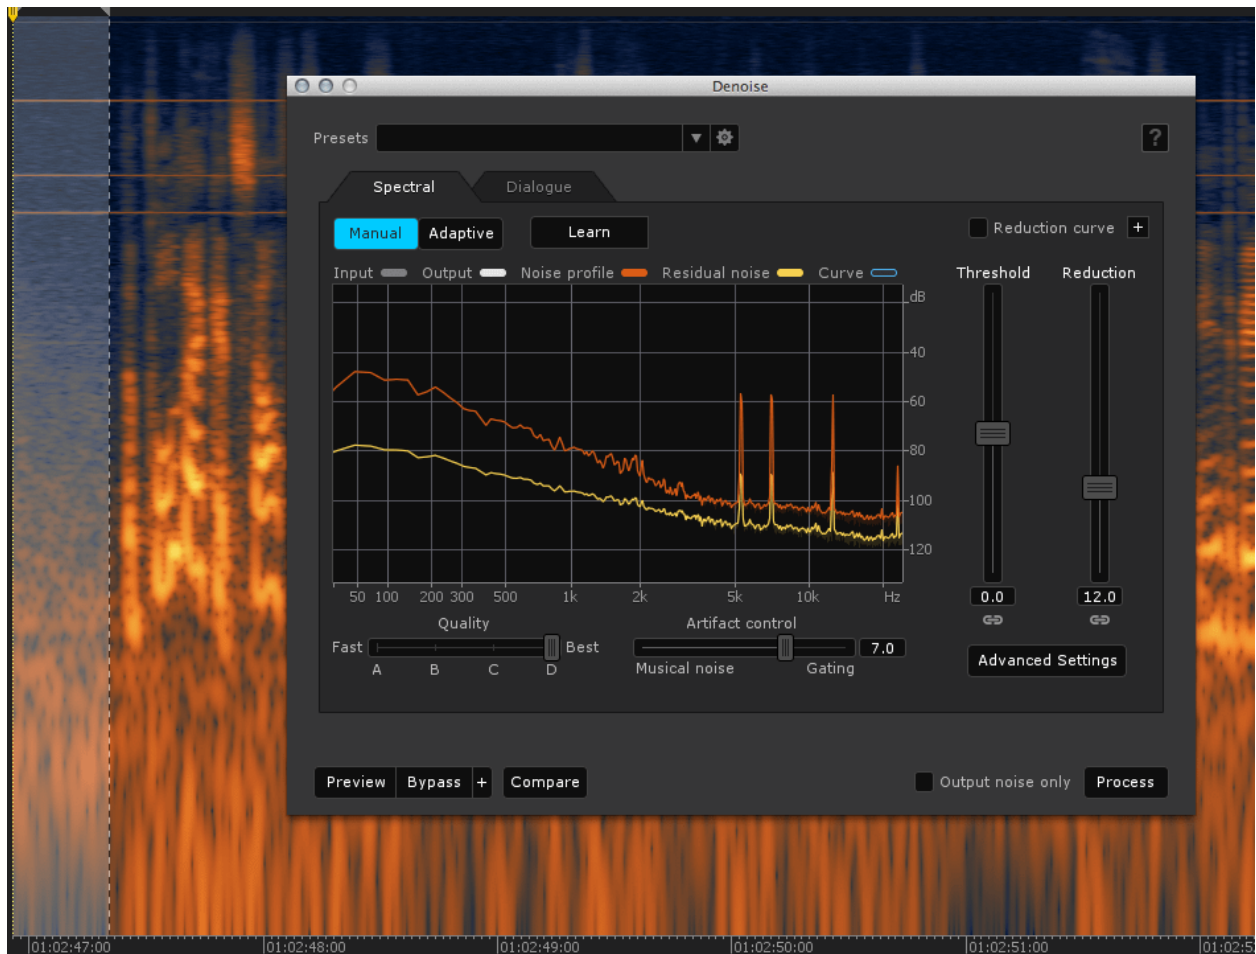


Before you click Process, there are a few key features that will assist in achieving transparent noise reduction on a dialogue track, particularly if the noise is from HVAC, lighting, or other electrical interference:

- **Reduction curve:** Use this feature to adjust the strength of processing in different frequency areas. Backing off the processing around 5 kHz, where the dialogue’s sibilance is most pronounced, helps avoid artifacts.




- **Tonal vs. Noisy reduction:** Delinking these sliders allows independent control over the tonal and noisy elements in a noise profile. This is particularly useful for heavily reducing hum and buzz in a dialogue track, as the Tonal slider can be pushed hard without causing artifacts in the dialogue.

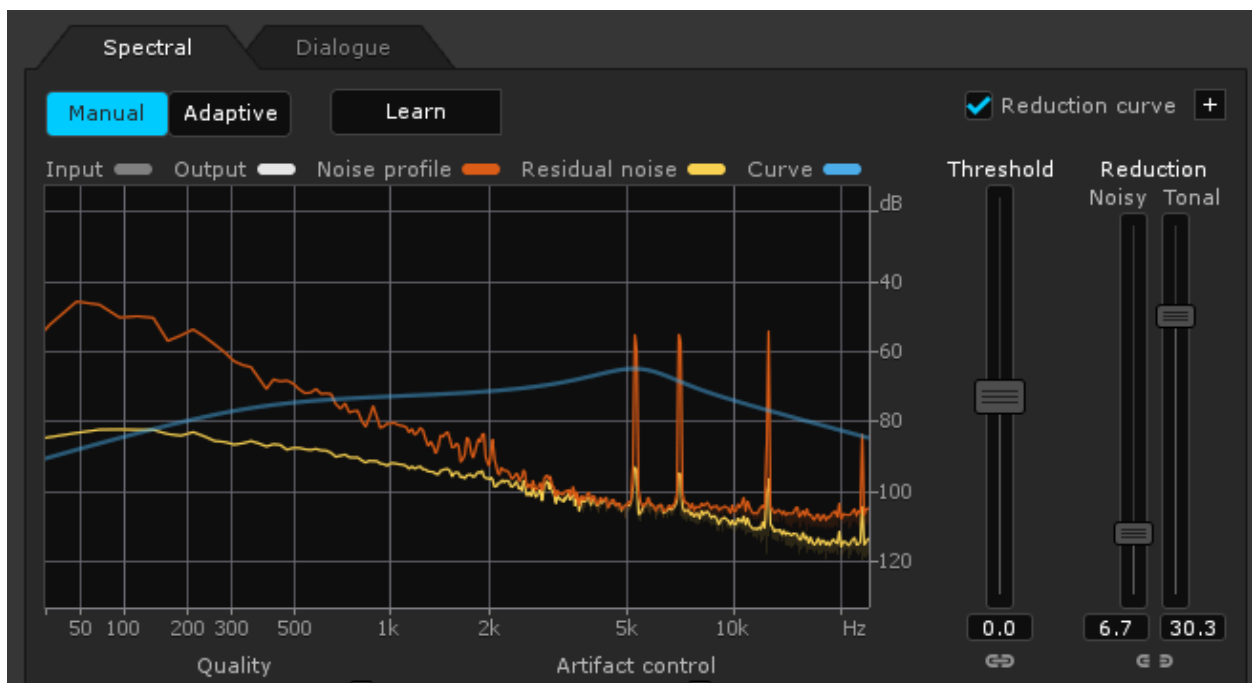


TIPS FOR TACKLING PLOSIVES AND MOUTH SOUNDS

Plosives are often unavoidable, especially when microphones are in close proximity to the presenter or voiceover artist. These pesky bursts of low-frequency information are usually found between 0 - 150 Hz, but can extend as high as 300 Hz, and appear as bright, momentary bumps on the spectrogram.

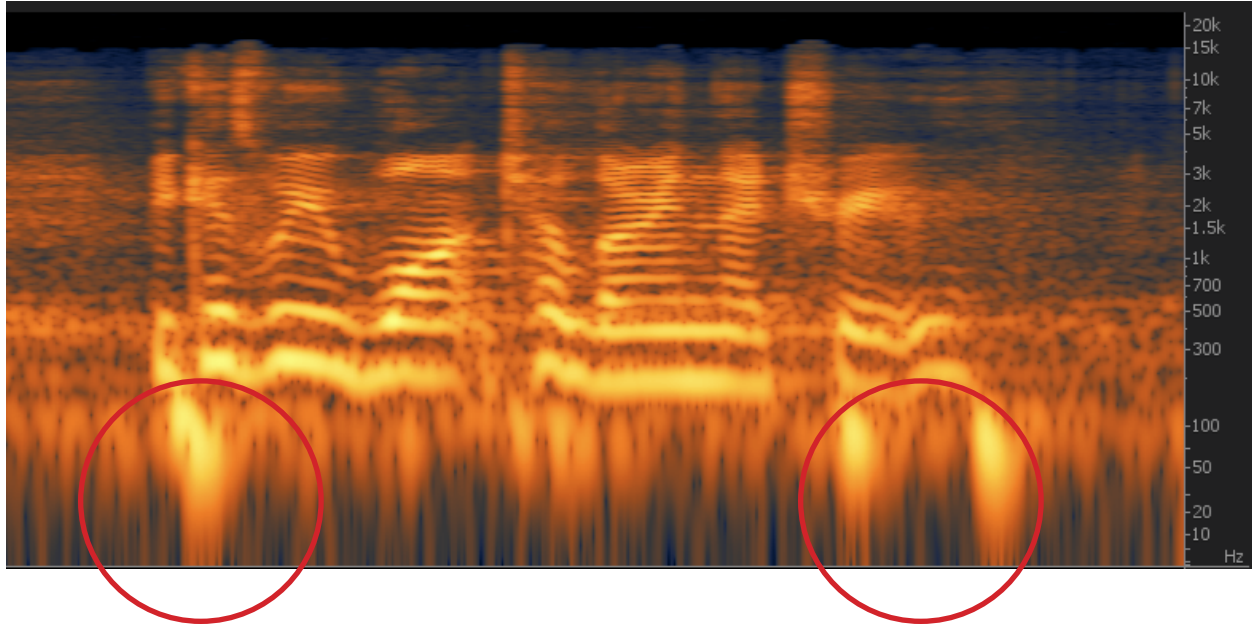



Mouth noises, otherwise known as lip smacks, or other watery sounds are largely avoidable via effective hydration and by avoiding certain thicker liquids such as milk or soup. But they often creep in regardless, and even a good recording by a seasoned voiceover veteran may have some mouth noise issues. These typically appear as short, bright areas that cover the high end and a lot of the low end of the spectrogram.

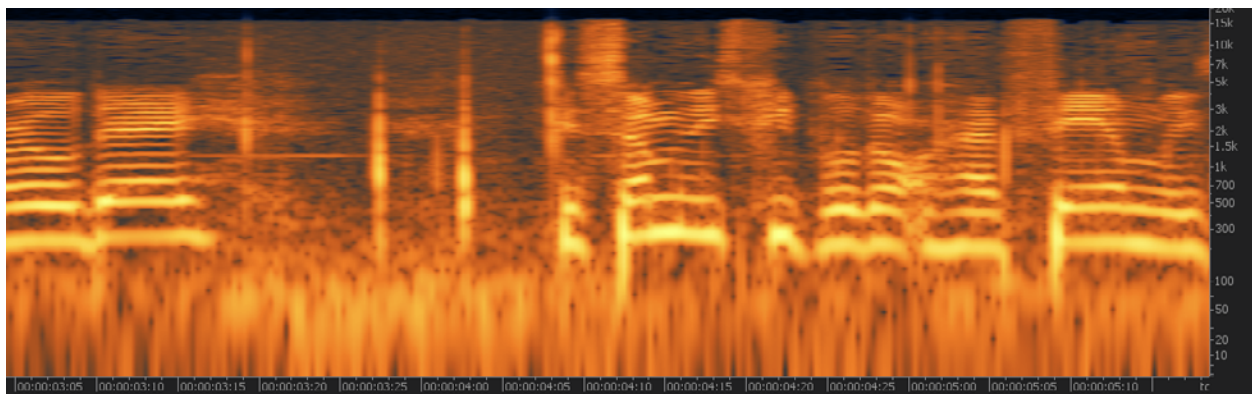

PLOSIVES


Step 1:

Right click on the Frequency scale to the right of the Spectrogram and select Extended Log. This display mode shows more information in the lower frequencies, so you may clearly see the plosives.

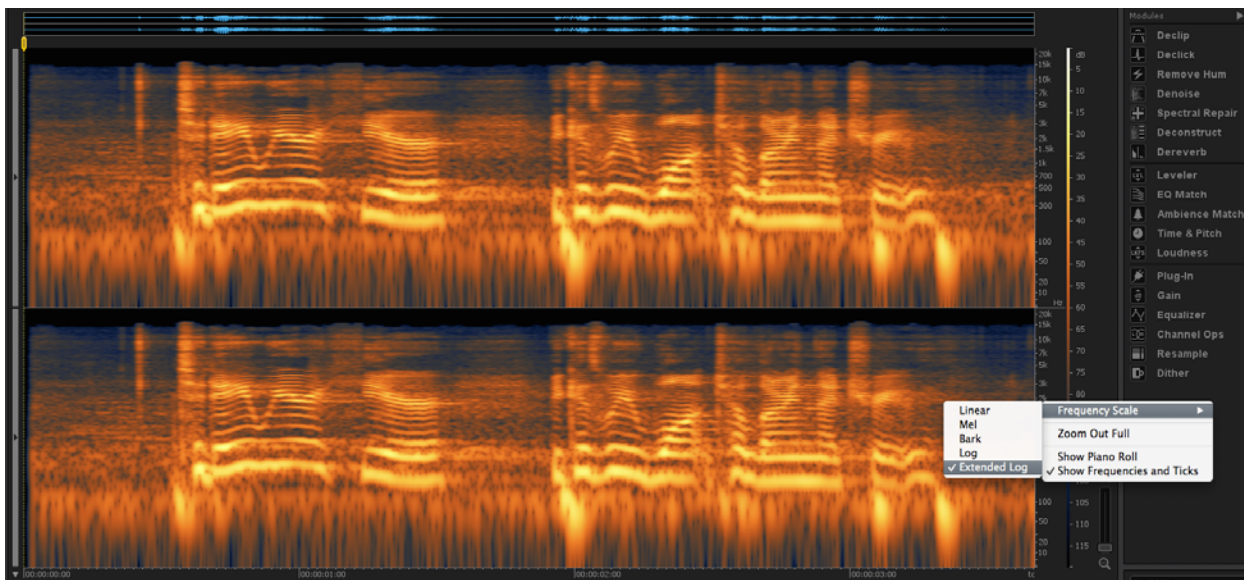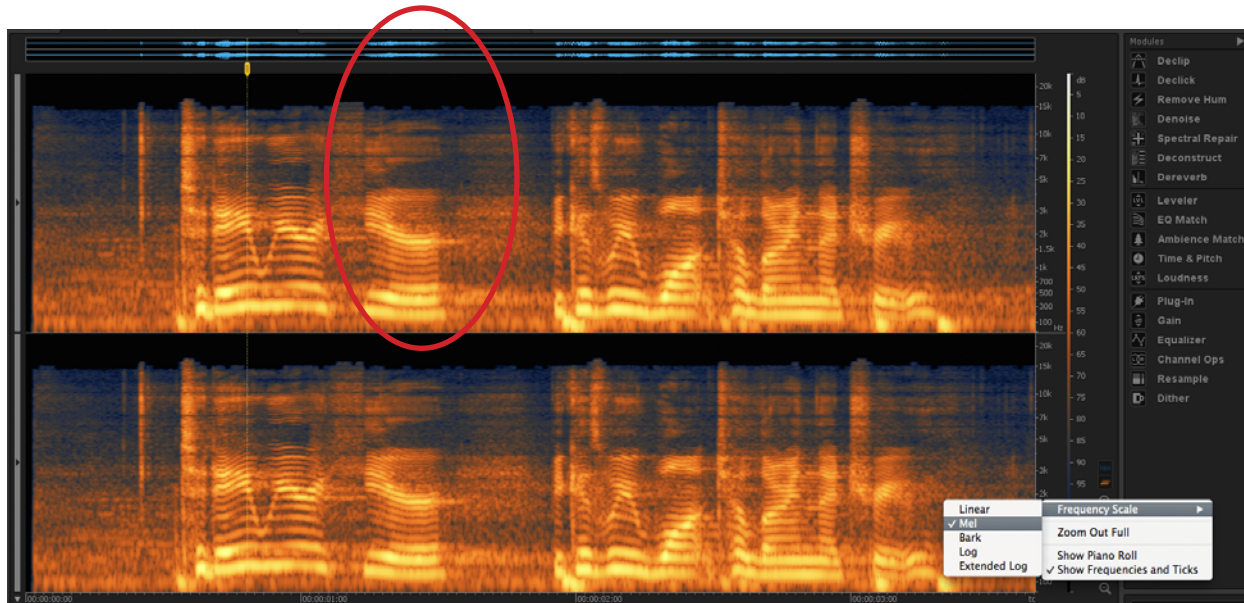


Step 2:

Using the Brush Tool, draw around the plosive(s). Open Spectral Repair, and use the default Attenuate settings to process the selection. If the plosive is still audible, step back and try processing with a higher Strength value.

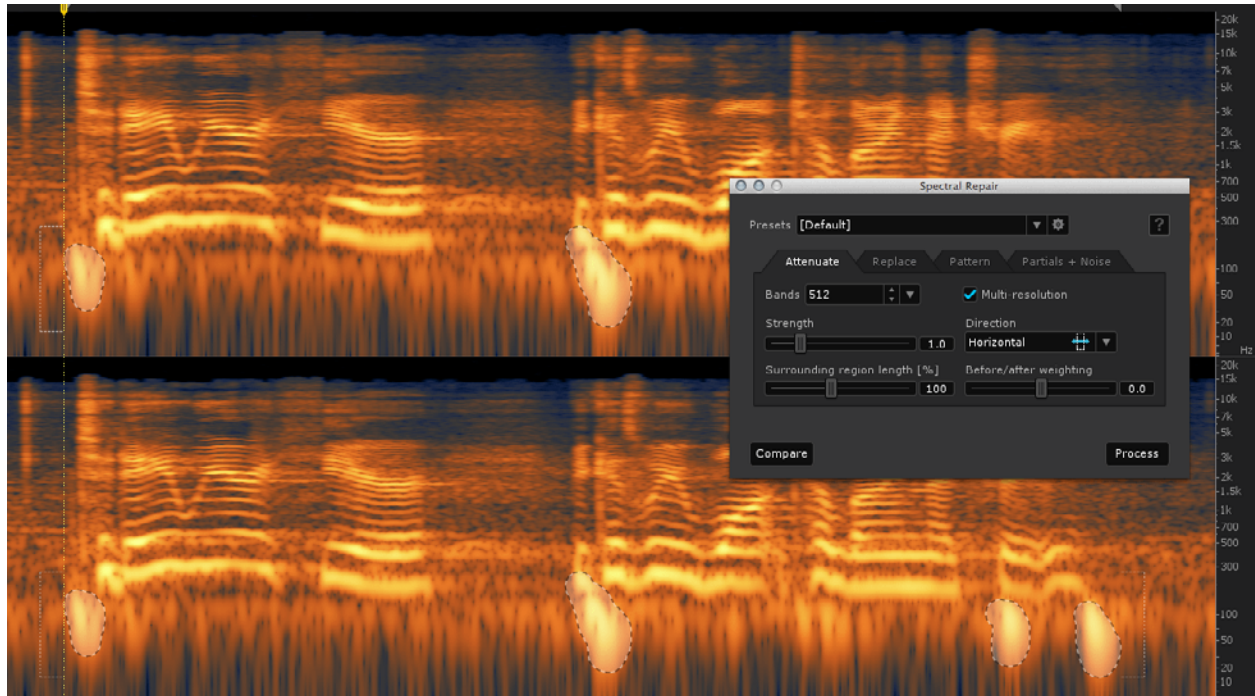


TIP • If your file is long, and drawing out each individual plosive would take some time, try using the Frequency selection tool to make a blanket selection between 30 Hz to just under where the dialogue sits, and process this selection with Spectral Repair's Attenuate in Vertical mode and a weighting of After.

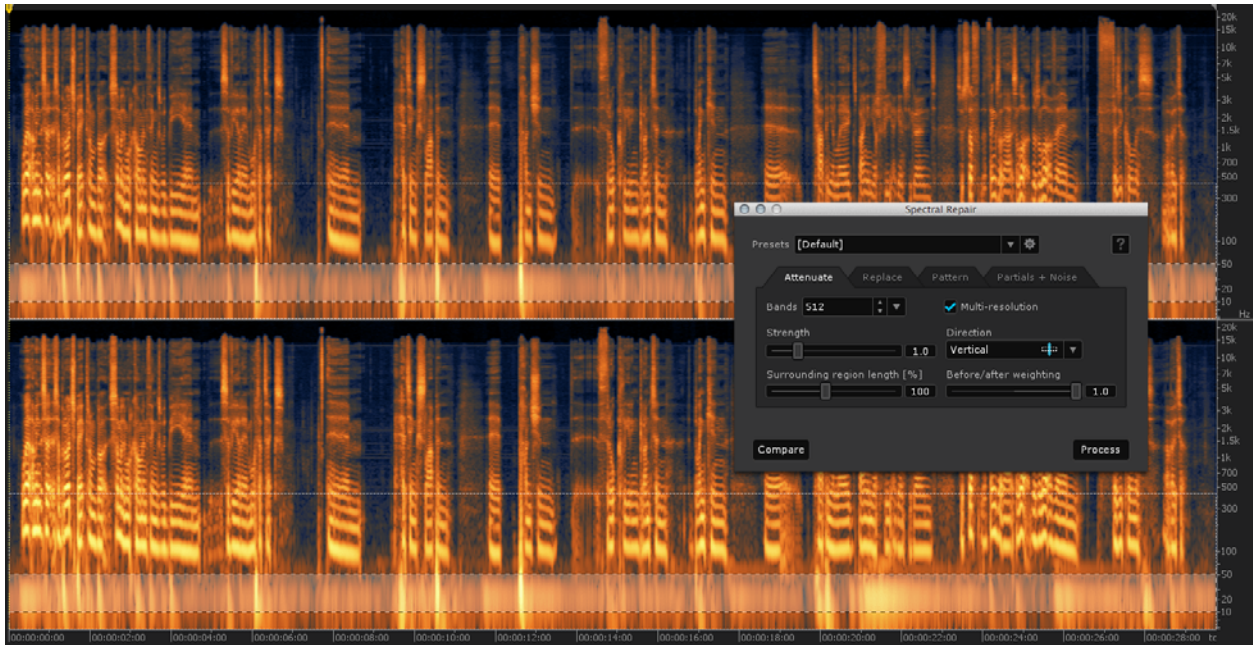


Step 3:

If the plosive is reduced, but still impactful and audible, try further reducing the impact with Clip Gain. Right-click on the Spectrogram, and select View Clip Gain.

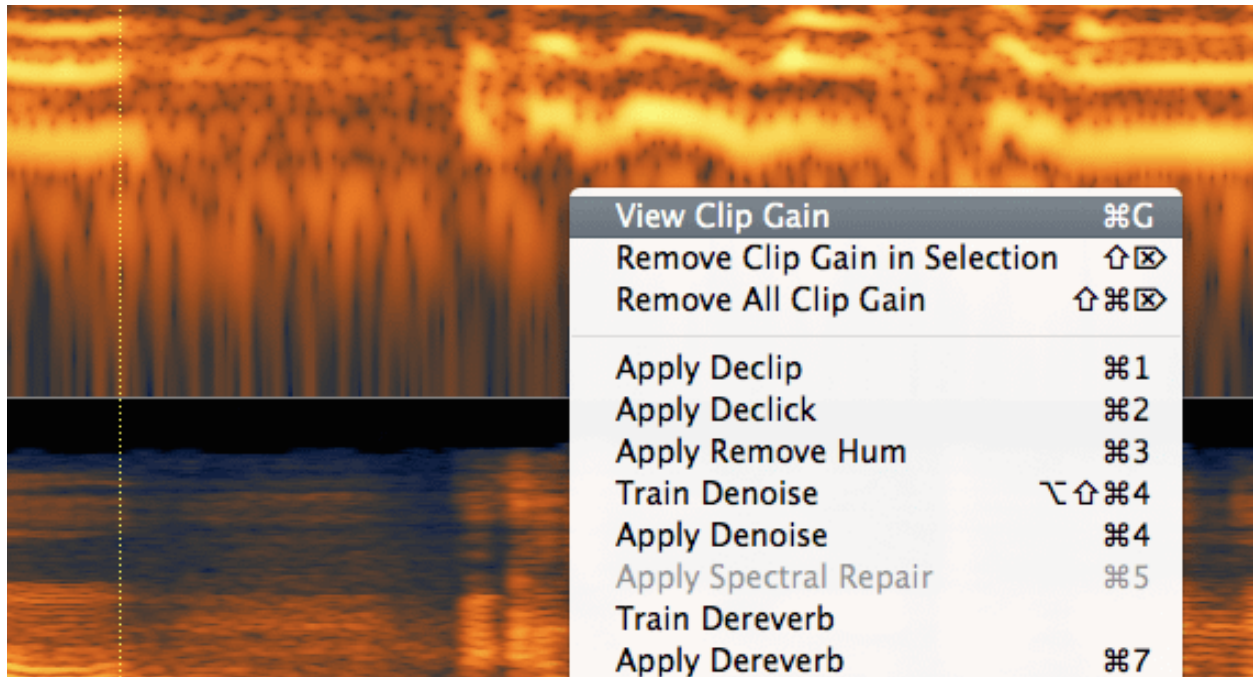


Left-clicking adds nodes, and drawing in a slight, momentary volume reduction can help reduce the impact of the plosive.

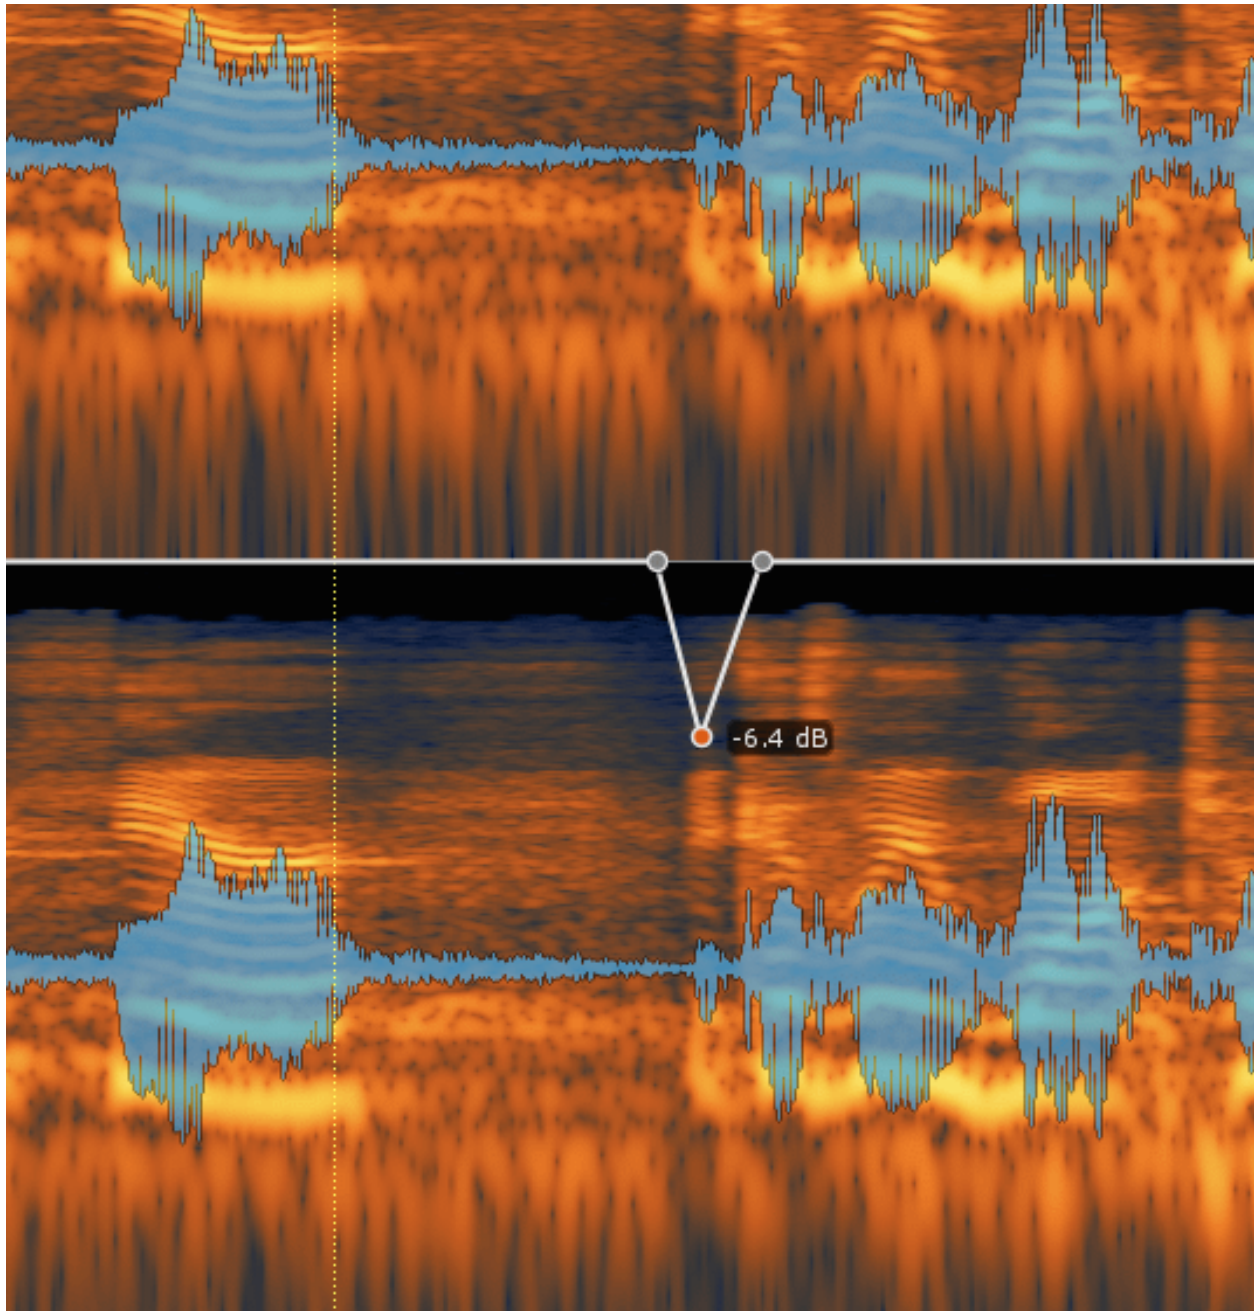

MOUTH NOISES

Step 1:

Open the Declick module and select the M-band (random clicks) algorithm as well as the Click type “Click”.

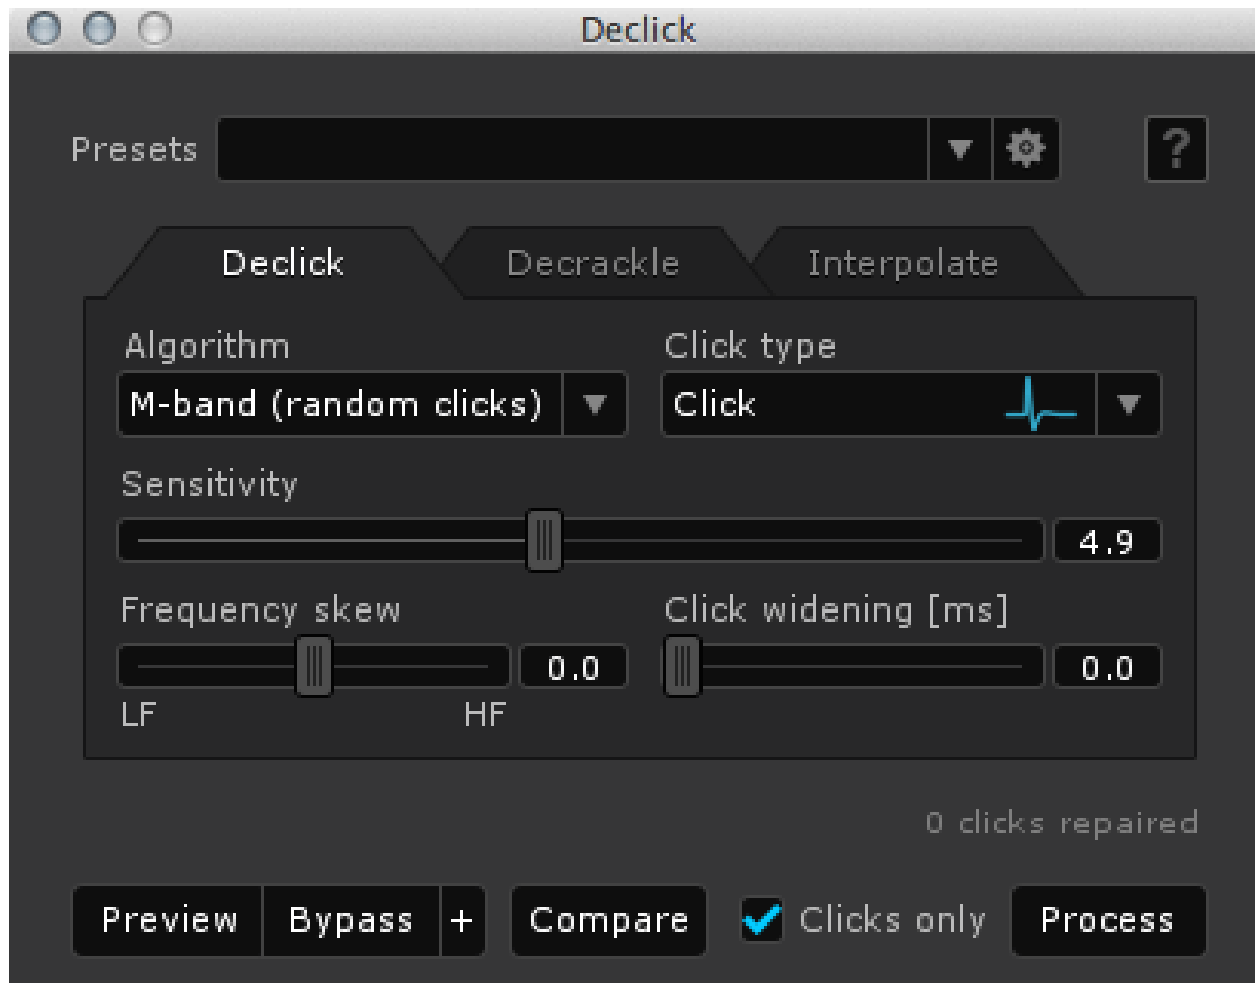


Step 2:


With Clicks only selected, click Preview, and adjust the Sensitivity slider up until you start to hear bits and pieces of words and phrases. Since you are currently auditioning only the clicks RX will be removing, this means you've gone too far; so dial back the processing, uncheck Clicks only, and click Process.

Step 3:

If the mouth noises persist, it is possible Decrackle may also be able to attenuate them. Open Declick, and select the Decrackle tab.

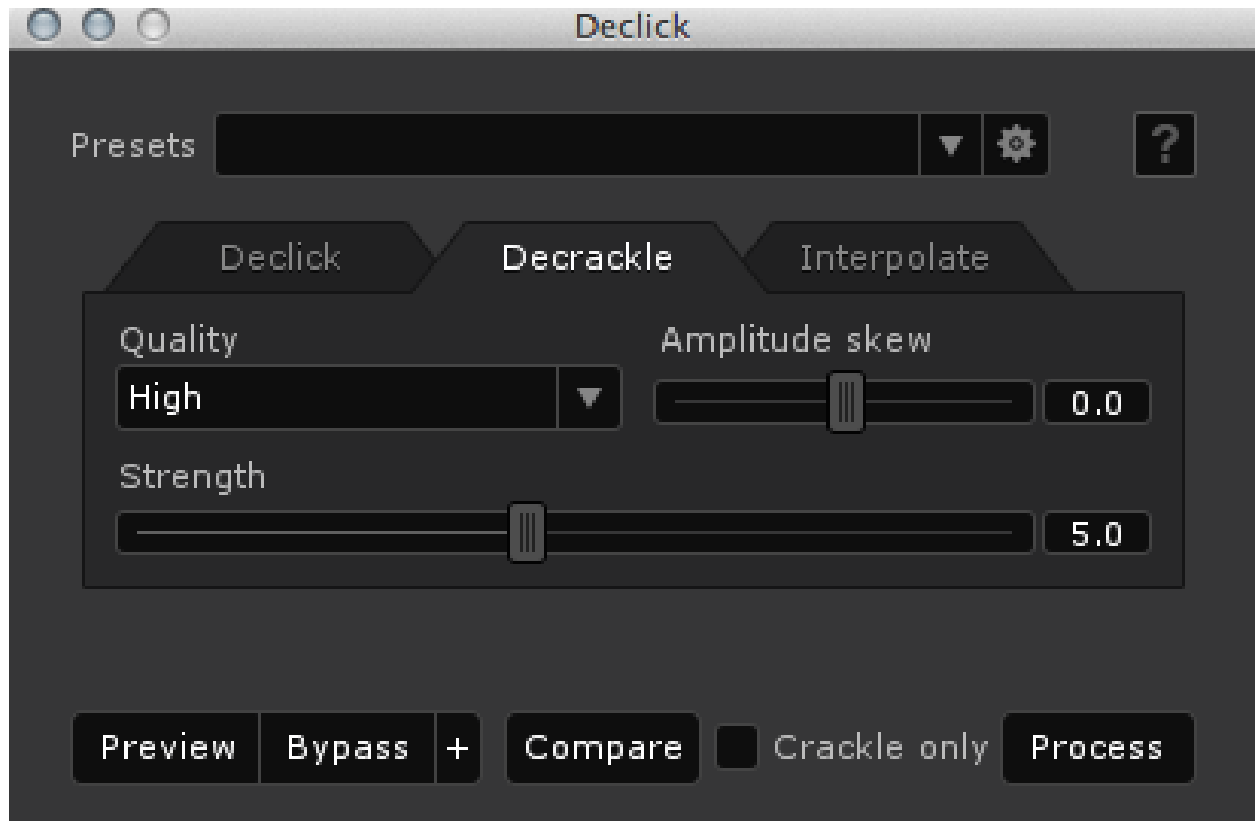

Use the Frequency selection tool to select the area where the mouth noises are most commonly heard, usually between 3 - 20 kHz. Click Preview in Decrackle and adjust the Strength slider until you hear the mouth noises start to disappear. Click Process to reduce the mouth noises within your selected area.

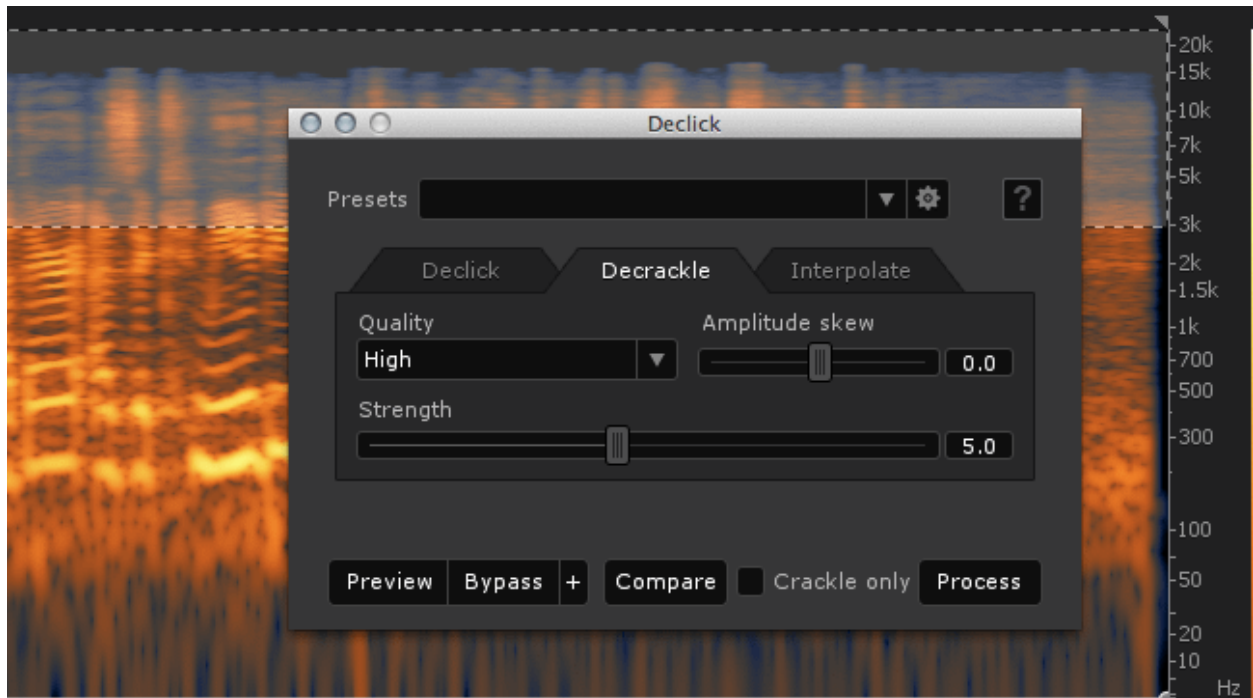

TIPS FOR TACKLING MATCHING

Matching different pieces of recorded dialogue together can be a challenge for the dialogue editor.

The plethora of microphone sources that accompany a typical shoot/recording not only have different-sounding frequency responses, but also sound different based on their proximity to the speaker. These different-sounding and inconsistent EQ profiles can harm the immersive experience the dialogue editor wants to maintain for the audience. The process of using an EQ to try and match the EQ profile of one audio recording to another can be time consuming.


Another matching issue results from the fact that audio is often cut to picture, leaving holes in the ambient sound of a scene, perhaps during the transition between two shots. This challenge, and the juxtaposition of ADR with location-recorded dialogue, can result in a disjointed listening experience as the natural ambience of a scene drops in and out.

A common solution is to copy, paste, and crossfade ambiences, which is again fairly time consuming.

Matching EQ profiles

Step 1:


Open both the audio source that sounds good, and the audio source that requires matching in RX.

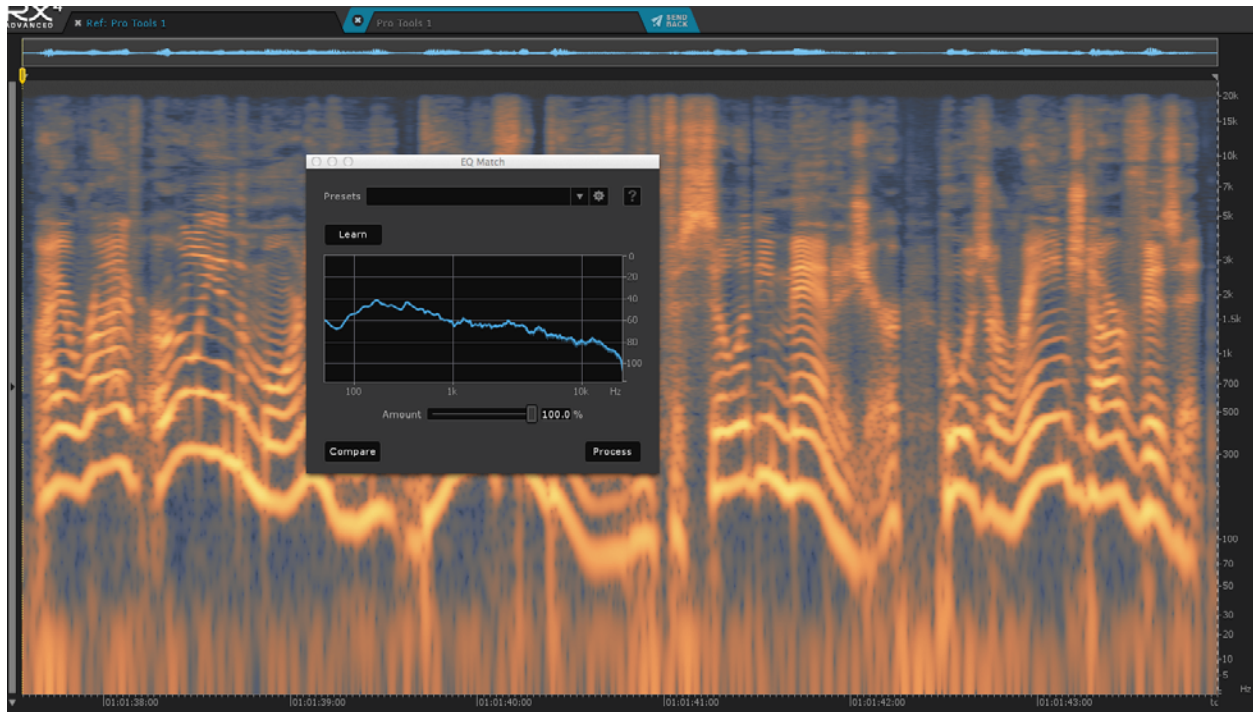

Open EQ Match, and navigate to the tab that holds the good-sounding audio source. Click Learn to teach RX the EQ profile of this sound.

Step 2:

Navigate to the tab with the audio source that requires fixing, and click Process. This will automatically recognize the sonic signature of the audio, and conform it to fit that of the source audio, thus matching the two different sounds together.

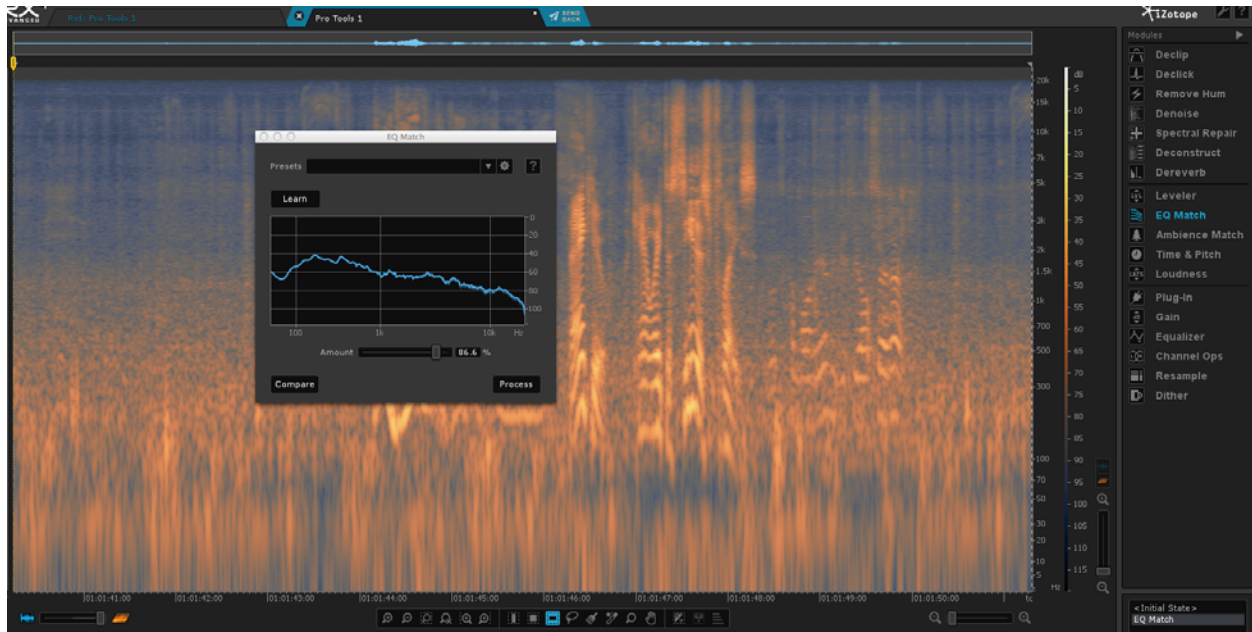

Step 3:

If the result isn't perfect, you may wish to adjust the Amount slider. Typically an amount of between 85 - 100% is good. 100% is the maximum amount of matching, and may sometimes be too much.

Matching Ambiences / Filling Ambient Holes

There are two approaches that the dialogue editor might take in order to seamlessly create room tone.

To fill holes within a file, try the following:


Step 1:

If working within a host, select the area in your audio track containing the clips that need fixing, and use RX Connect to send it to RX 4. Or, render out an audio file containing these regions and load it in RX.




Step 2:

Open Ambient Match and click Learn. You do not need to select what ambience is present in the file, as Ambient Match automatically identifies this for you.

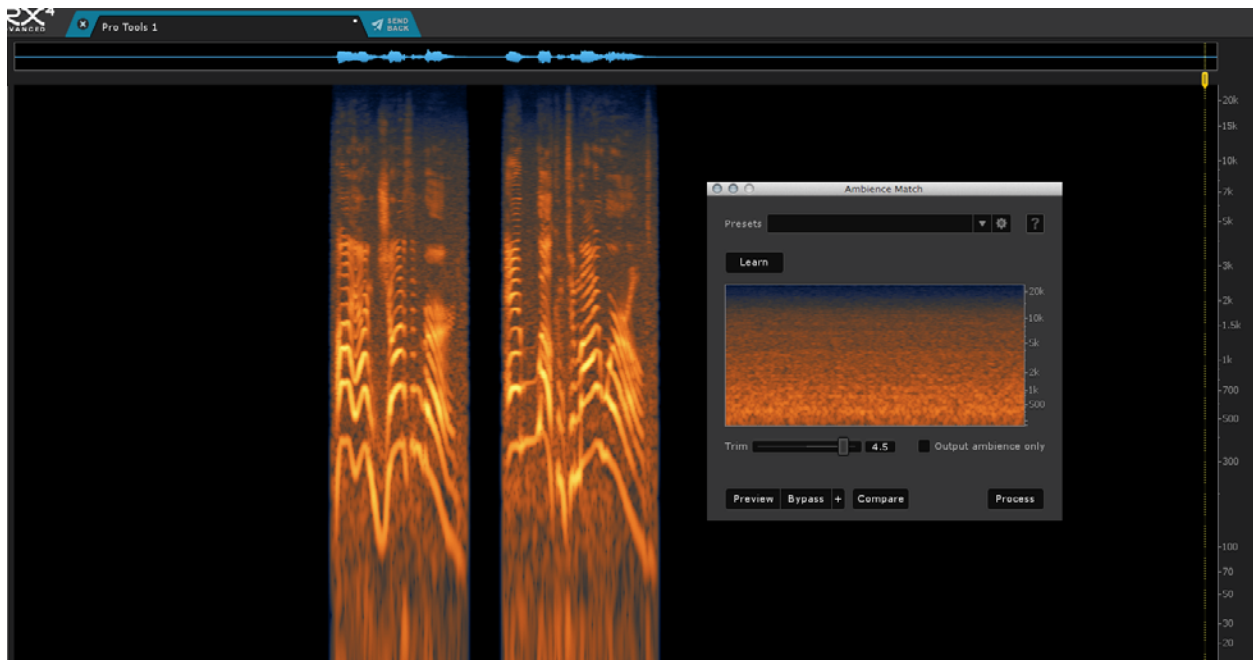

Step 3:

Click Process to apply the Ambient throughout the audio file, filling the holes.

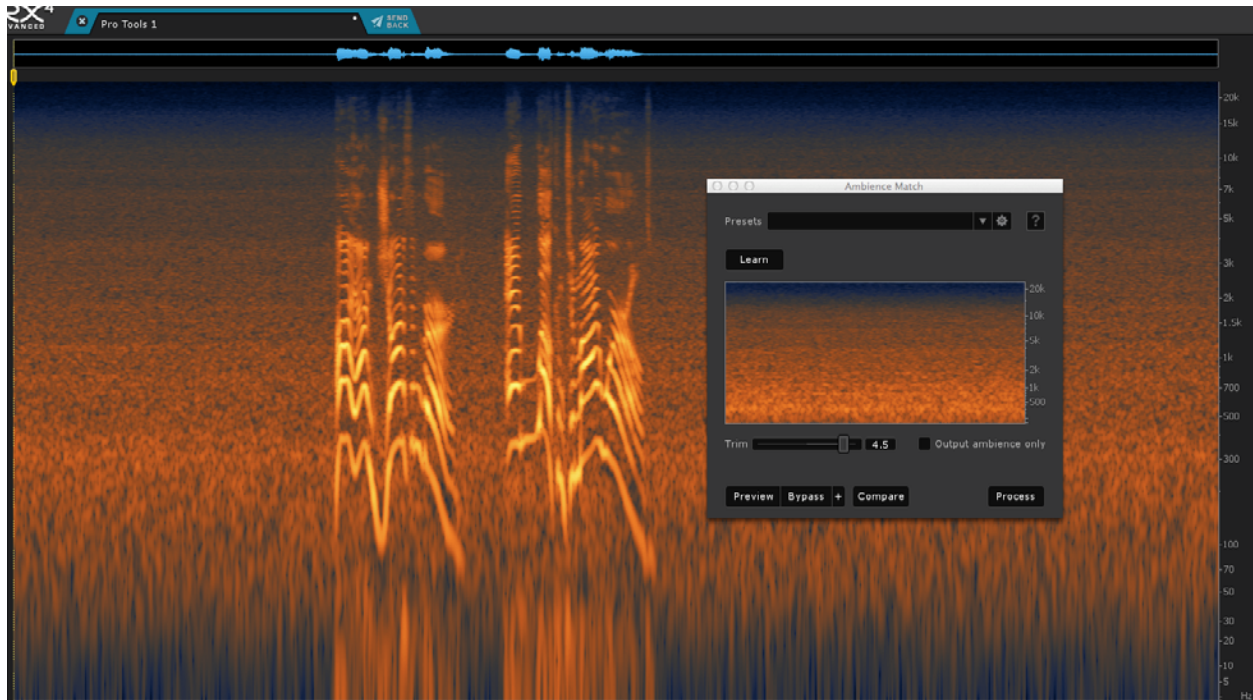

You may find upon listening back that the ambience applied within the holes is slightly quieter, causing a volume jump in the ambience that is still jarring. See Step 4 for a solution to this issue.

Step 4:

The Trim control is a smart tool that can be used to add or reduce gain to only the ambience that's inserted where ambience didn't exist before. If you have filled the ambient hole, this control can be used to overcome this issue.


To create unlimited amounts of ambience for use as ambient beds to underscore scenes, add to ADR, or to add to an asset list for future use, try the following:

Step 1:

Working in RX: Open the audio file containing the ambience you want to capture, and then also create a new, blank RX Document in RX.


Working in RX (from RX Connect): Send a clip containing ambience as a reference to RX, and then select a blank region in your host and send it as a repair clip.



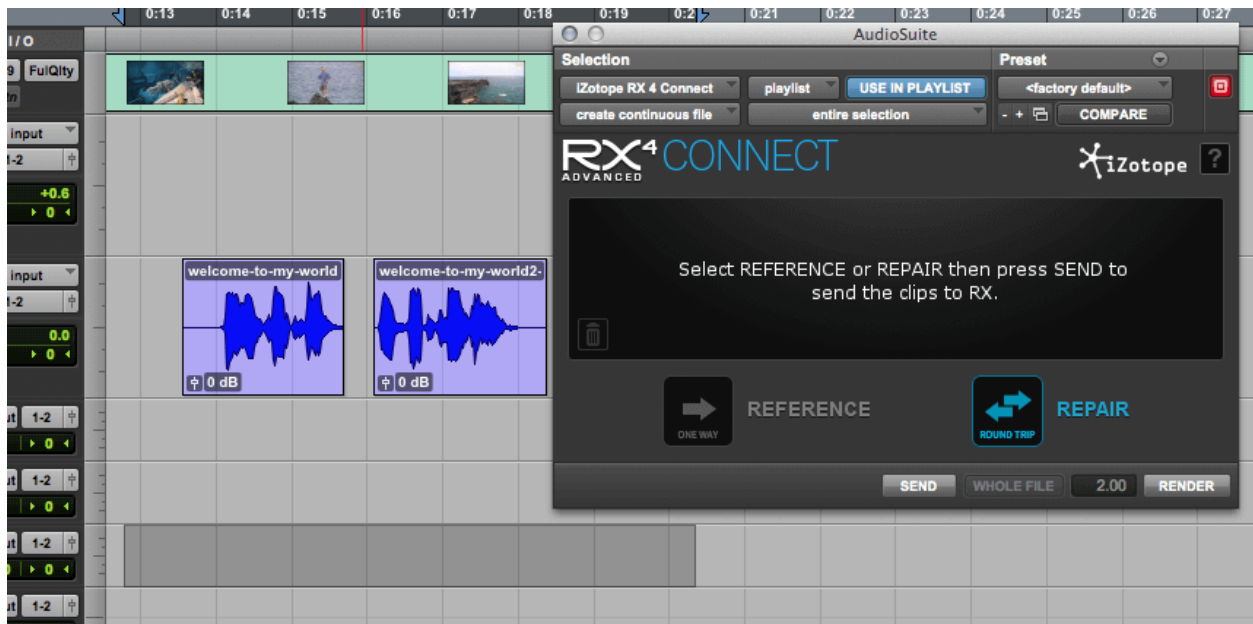

Step 2:

Learn the ambience from the reference clip, and then move to the tab that contains the blank audio file. Click Process to apply the ambience across the entire blank area.

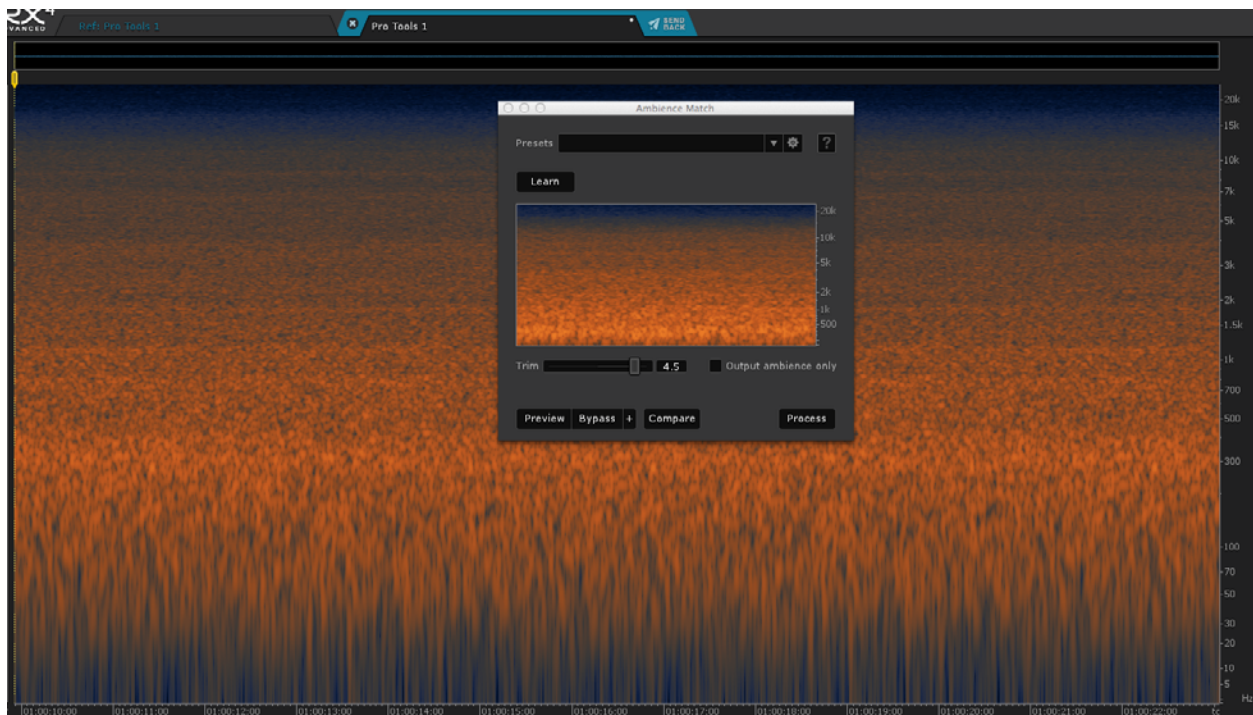

Step 3:

If you were using RX Connect, send this back to your host and render. If you were working from an RX Document, simply export your ambience as an audio file to use elsewhere.



Try these various dialogue editing tips and tricks for yourself to achieve better-sounding, more polished dialogue mixes!

8: BROADBAND NOISE REDUCTION

In the spectrogram chapter, we learned how to use a spectrogram to visually understand what's happening in your audio.

Broadband noise appears as random speckles or a haze over the audio file—similar to the static you see on your TV when there is no signal.

Below are screenshots of a noisy voiceover sound recording:


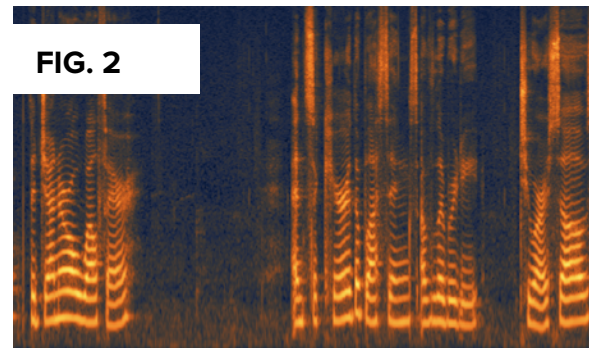


Fig. 1 demonstrates the audio file via a waveform view, and we can see the blocks of noise between the transient audio events that make up our voiceover.

Fig. 2 demonstrates the same audio file via a spectrogram view, and there are visible speckles. It's important to use a spectrogram when working with noise. As we see in the this view, the block of noise on the left is a better point to learn the noise profile from than the block of noise on the right, which has some other audio elements mixed in that could confuse the noise learning process.

Step 1:


For broadband noise problems, always use a Denoiser. The first step is always to create a noise profile. This may be done manually by isolating the noise, or automatically. A good denoiser offers both manual and automatic modes.

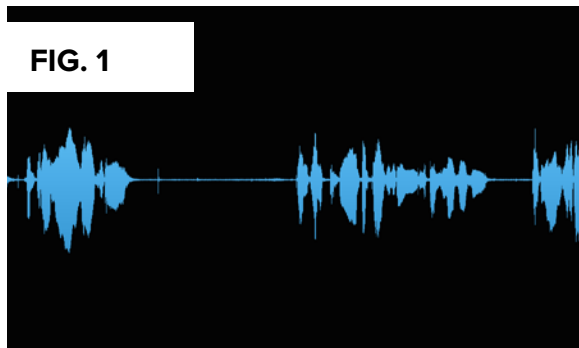

Automatic modes—such as Adaptive in the RX 4 Advanced Spectral Denoiser—listen to the audio and learn the noise profile on your behalf. These modes are most suitable for speech and scenarios with a changing noise profile, or when you want a faster workflow.


Some dedicated Dialogue Denoisers (such as RX 4 Advanced's aptly named Dialogue Denoiser) typically work in automatic mode, and may sound better when used on dialogue. For now, we'll focus on manual learning, as it's the best solution for a wider variety of audio, including music. We'll also be using the Spectral Denoiser in RX 4.

Select an area of the signal that contains nothing but noise, and click Learn (or the equivalent in your Denoising software). As a general rule, a selection of 100 ms should be the minimum, but the longer your selection of noise, the more accurately the computer can reduce the noise. We recommend a selection of at least 1 second, preferably 2-4 seconds or longer if possible.

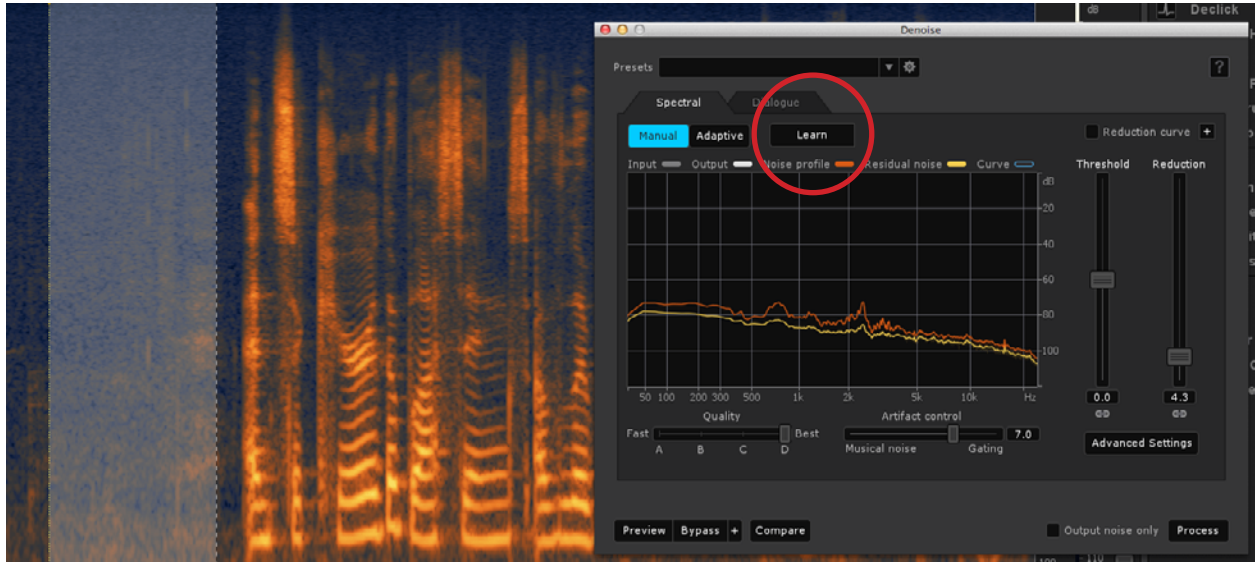


Step 2:

Begin to adjust the level of noise reduction and listen closely to the changes that occur in the audio. Some people prefer to slowly increase the amount of noise reduction until it sounds right, and stop once they start hearing artifacts. Other engineers prefer to go hard, and then dial it back until it sounds appropriate. Do whatever works best for you!

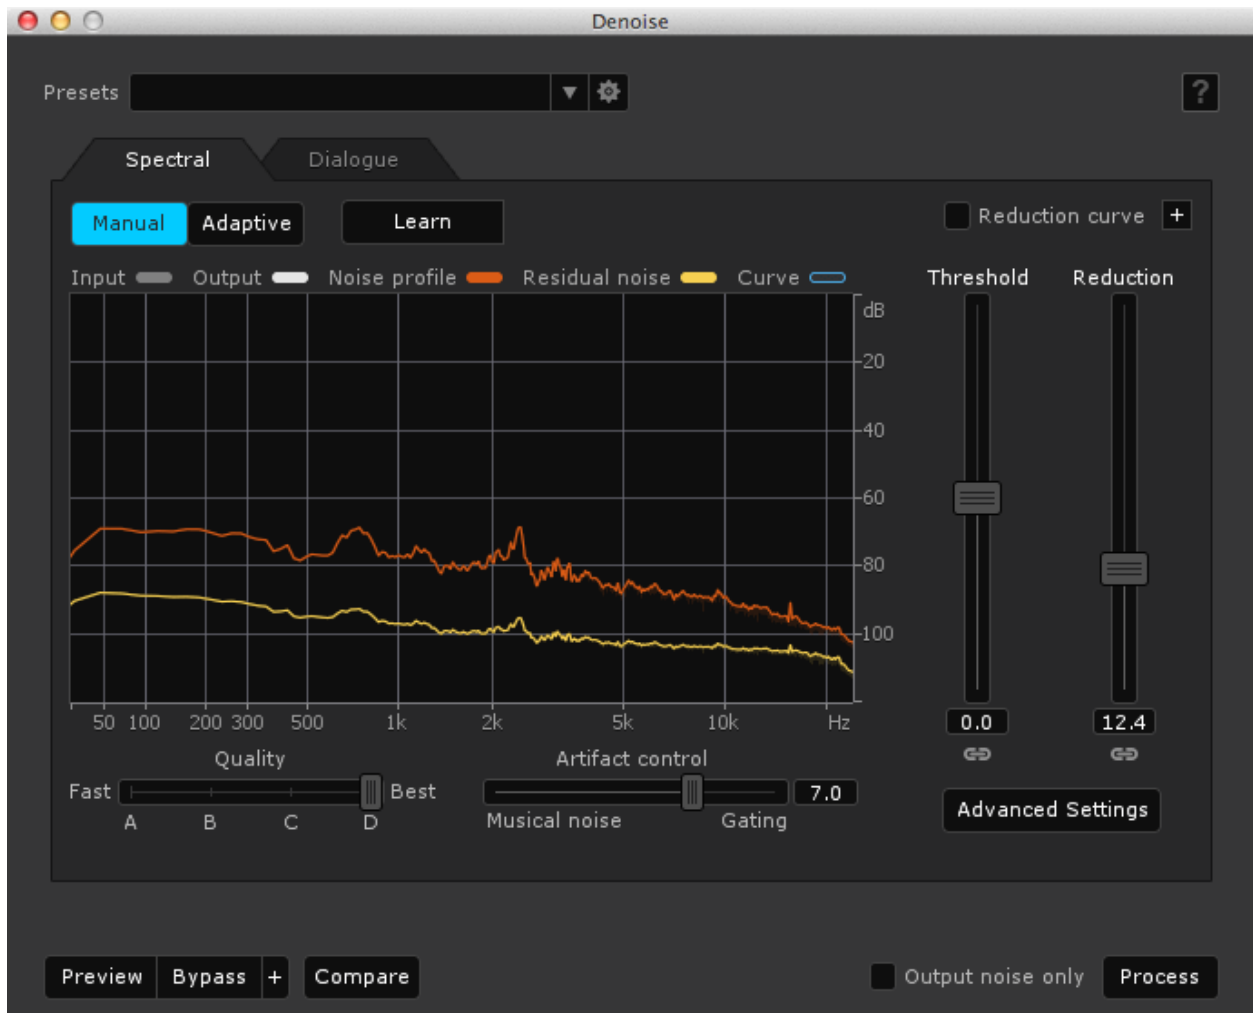

RX TIP • Use the Output Noise Only feature in RX 4's Spectral Denoiser to listen to just the noise. If you hear any desirable signal bleeding through, like low-level bursts of dialogue or music, you should reduce the amount of noise reduction.

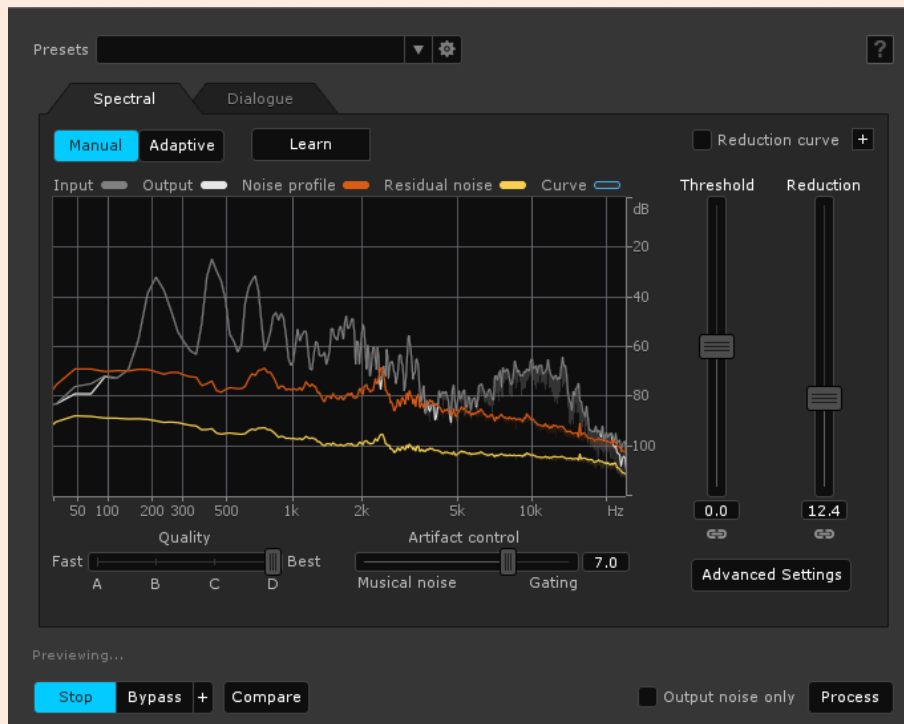

Levels of between -5 and -15 dB of noise reduction are common. If you find yourself approaching -15 dB of noise reduction and you aren't satisfied, consider doing a gentler pass of around -7 dB. Relearn the noise profile, and perform a second gentle pass of -8 dB. You'll end up with around the same level of noise reduction and hopefully less artifacts.

Play close attention to your original audio. The peaks of your waveforms should still be intact, and it should sound untouched. If you hear dulling or artifacts, it's a sign you've gone too far.

RX TIP • Algorithm D in RX 4 utilizes advanced high-frequency synthesis to avoid dulling. In RX 4 Advanced, you can access additional advanced-level controls to further tweak this functionality.

Step 3:


Once your noise reduction is beginning to sound effective, direct your attention to any smoothing filters your tool may offer, such as the RX 4 Spectral Denoiser's Artifact Control slider. Adjusting these smoothing tools can help eliminate any artifacts and preserve the main goal of improving the listening experience. We certainly don't want to make it worse by taking out some noise but adding in artifacts!

HUM AND TONAL NOISE REDUCTION

Hum and tonal noise are usually visible as bright, steady, horizontal lines. Hum and tonal noise look different from each other, and there are different methods available for treating them. Let's begin with hum:


Hum

Below is a screenshot of a recording with hum.

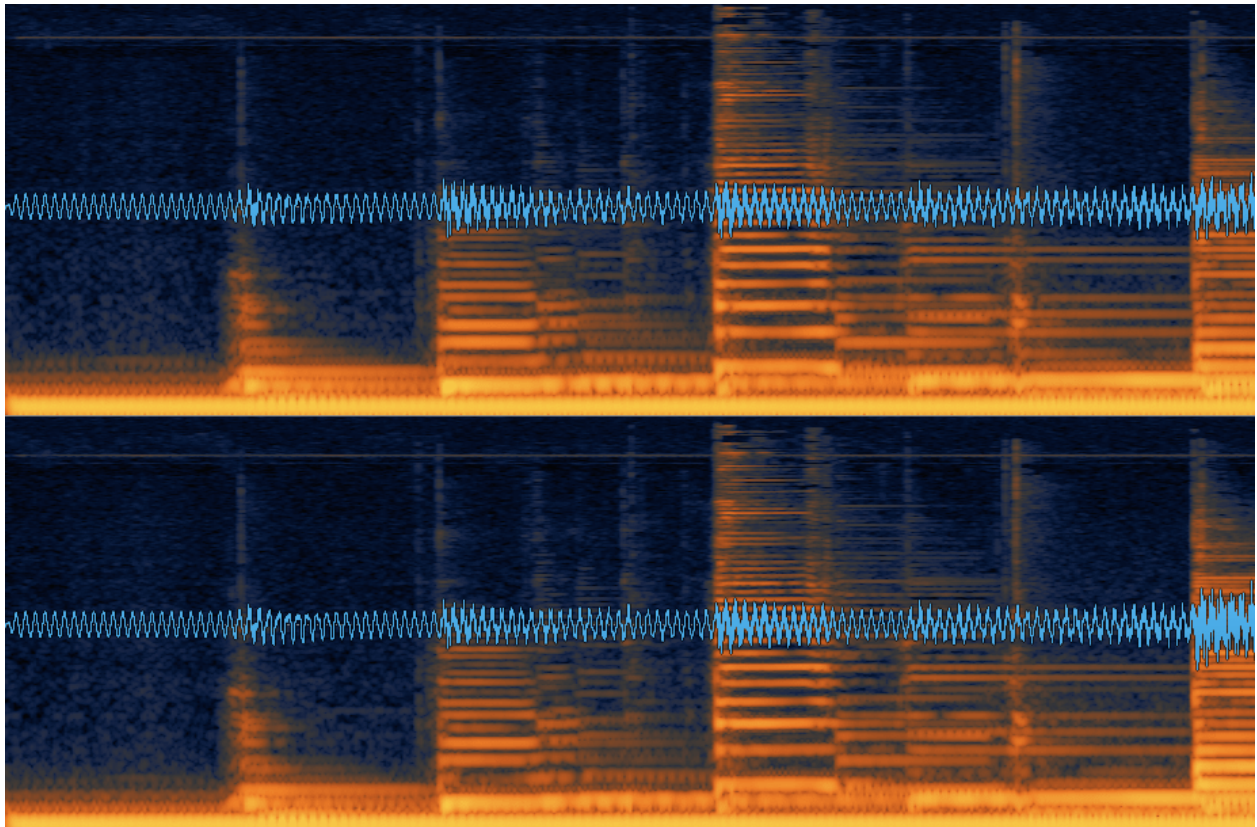


TIP • In order to see which frequencies make up the tonal noise, you can use a spectrogram to view the audio. This can be much more accurate and easy to read than a spectrum analyzer.


It's usually easy to identify the fundamental base frequency, as it's usually the most visible. Often, the fundamental frequency will be 50 Hz (Europe) or 60 Hz (North America) due to those regions' difference in electrical delivery. This audible hum originates from bad ground connections or inducted power sources such as AC mains or transformers.

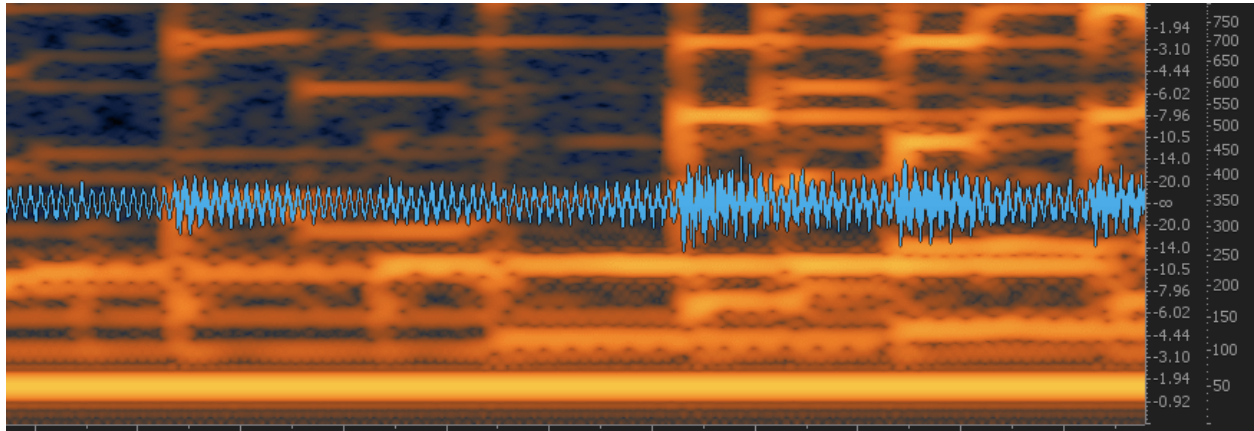

RX TIP • The Magic Wand tool in RX 4 can automatically select the fundamental frequency, and double clicking will automatically select all the additional harmonics.

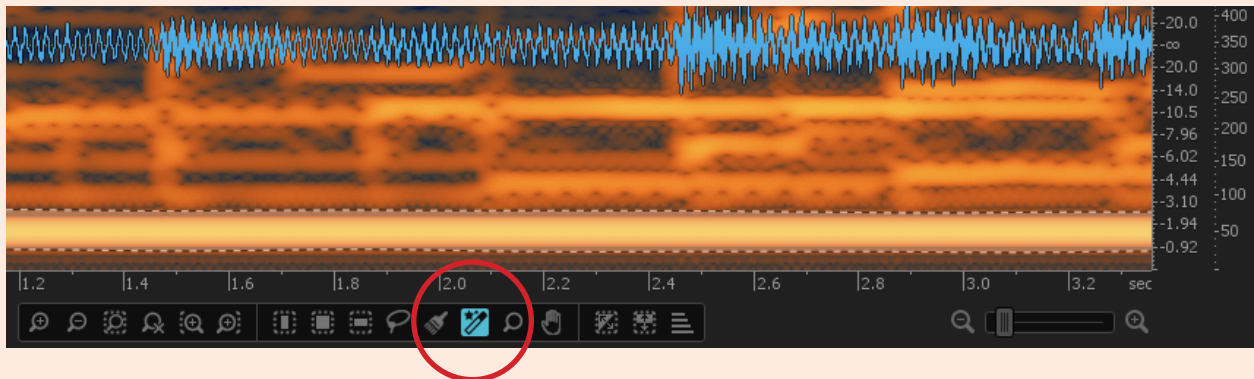


We'll start by using the Hum Removal tool. Hum removal tools, such as the one in RX 4, are extremely precise filters, designed to notch out very specific frequencies. For basic hum with anywhere from two to seven harmonics, this is an effective tool.

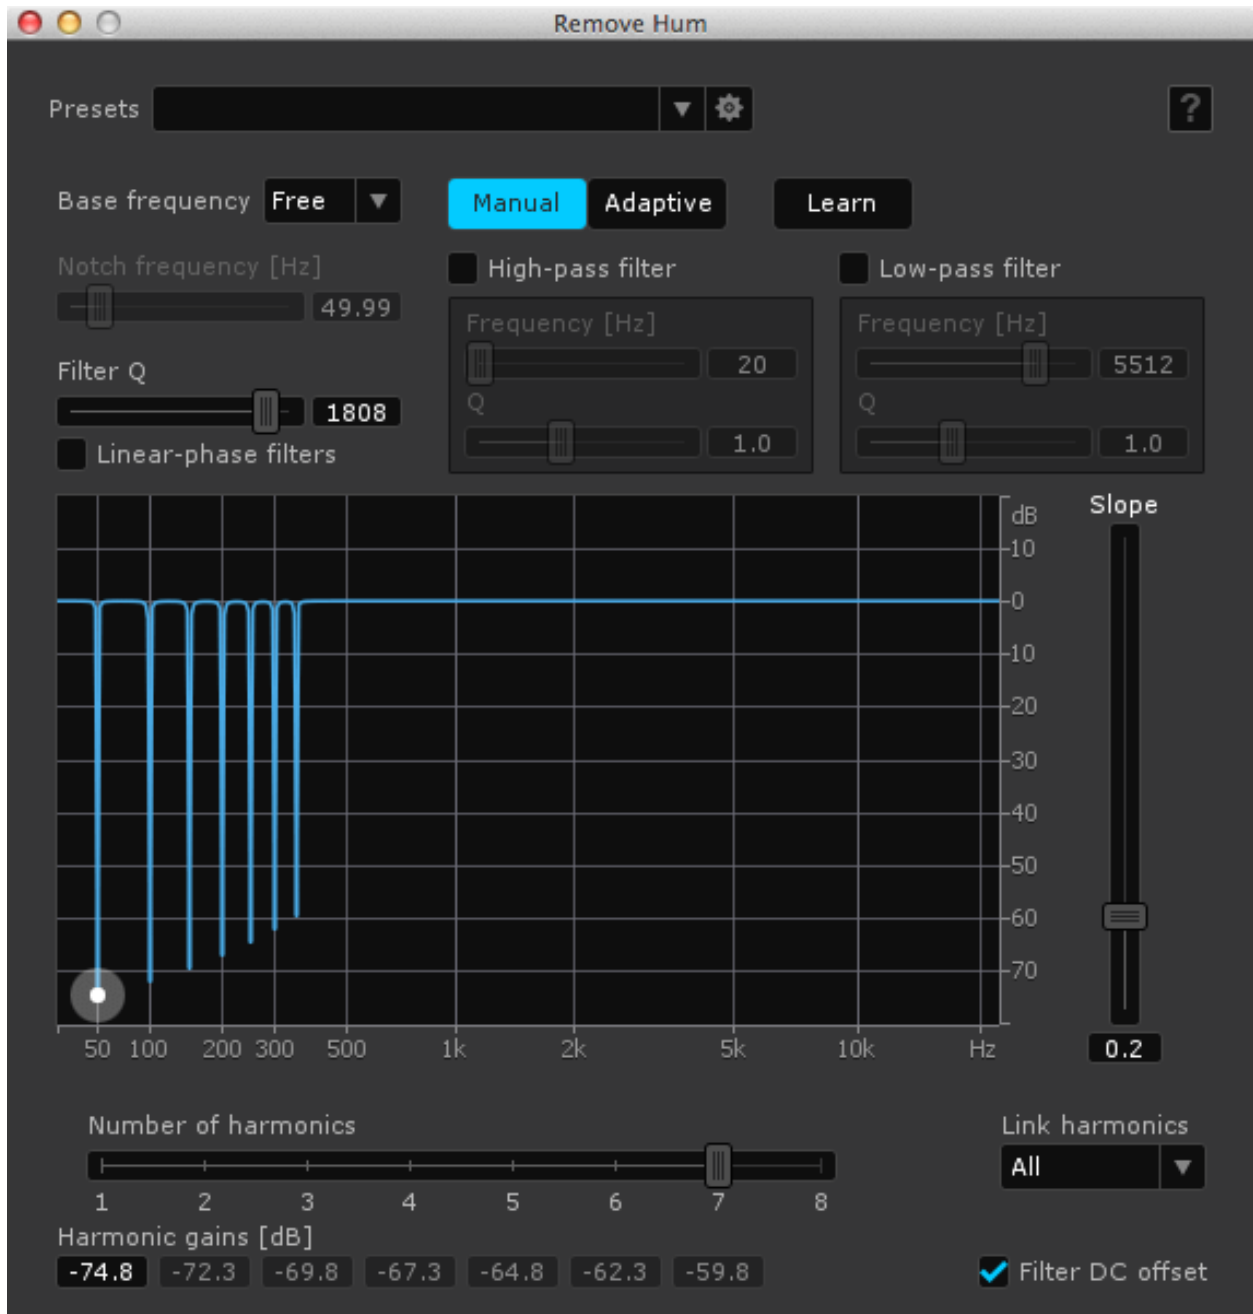


Step 1:


To begin, identify the frequency of your hum. Your ears and the spectrum analyzer module may help. Set the base frequency to 50 Hz or 60 Hz, depending on where the audio was recorded. If the hum isn't located at 50 Hz or 60 Hz, you may use Free mode, which unlocks the filters and allows you to set the base frequency yourself.

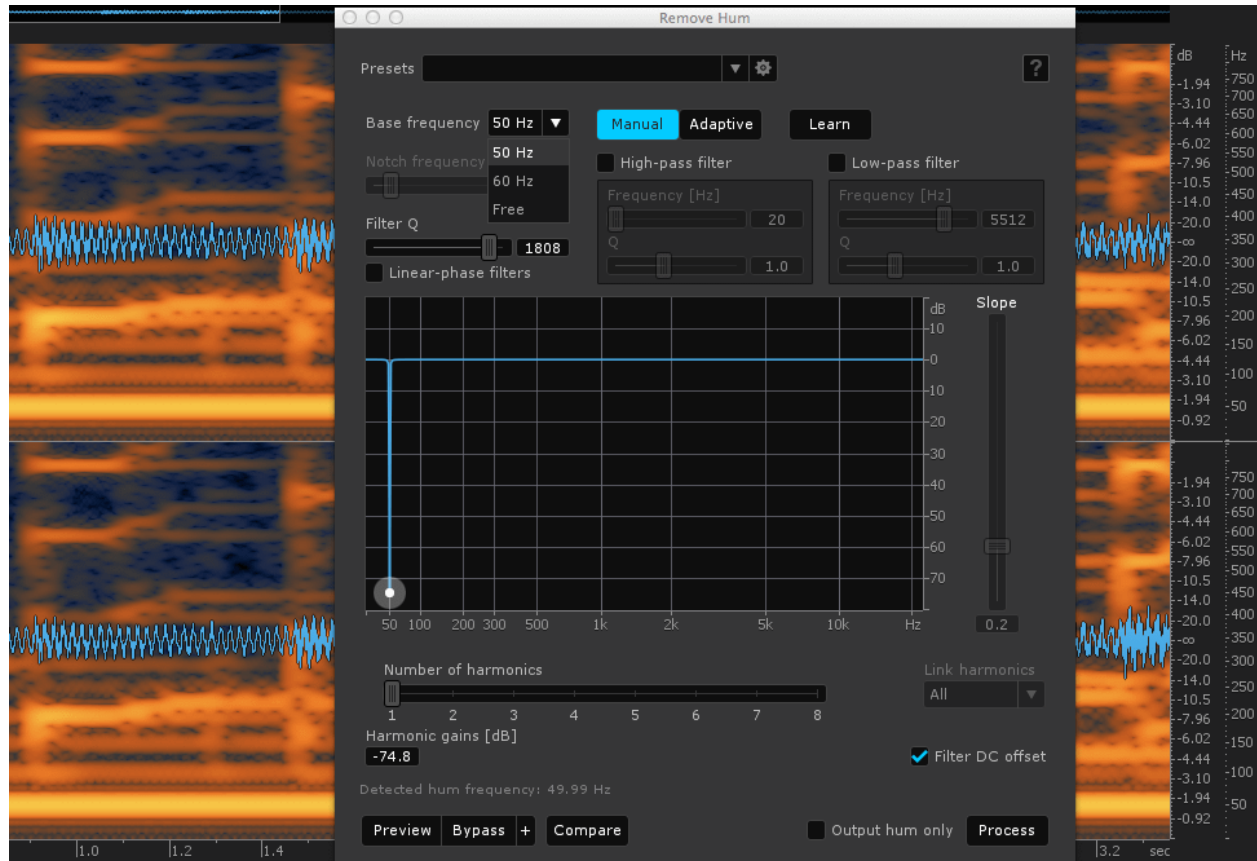

RX TIP • Use the time selection tool to select an area of hum and click Learn. This automatically sets the filters to the correct frequencies based on your selection.

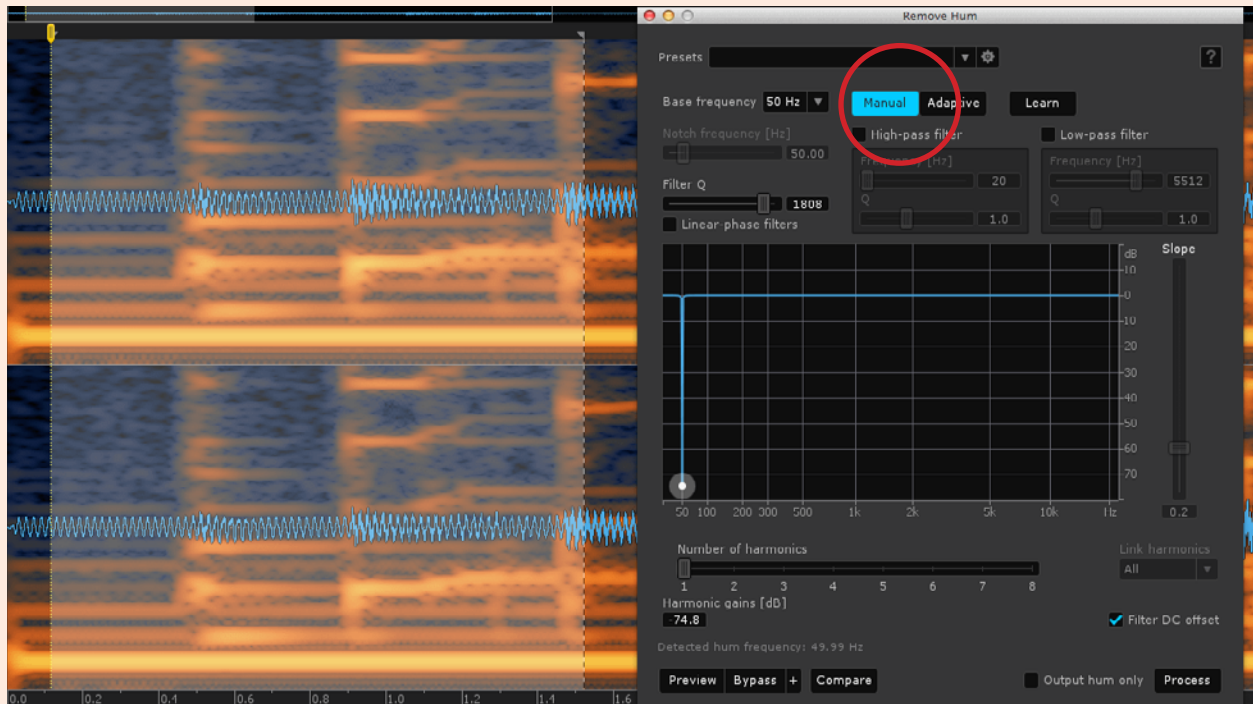


Step 2:

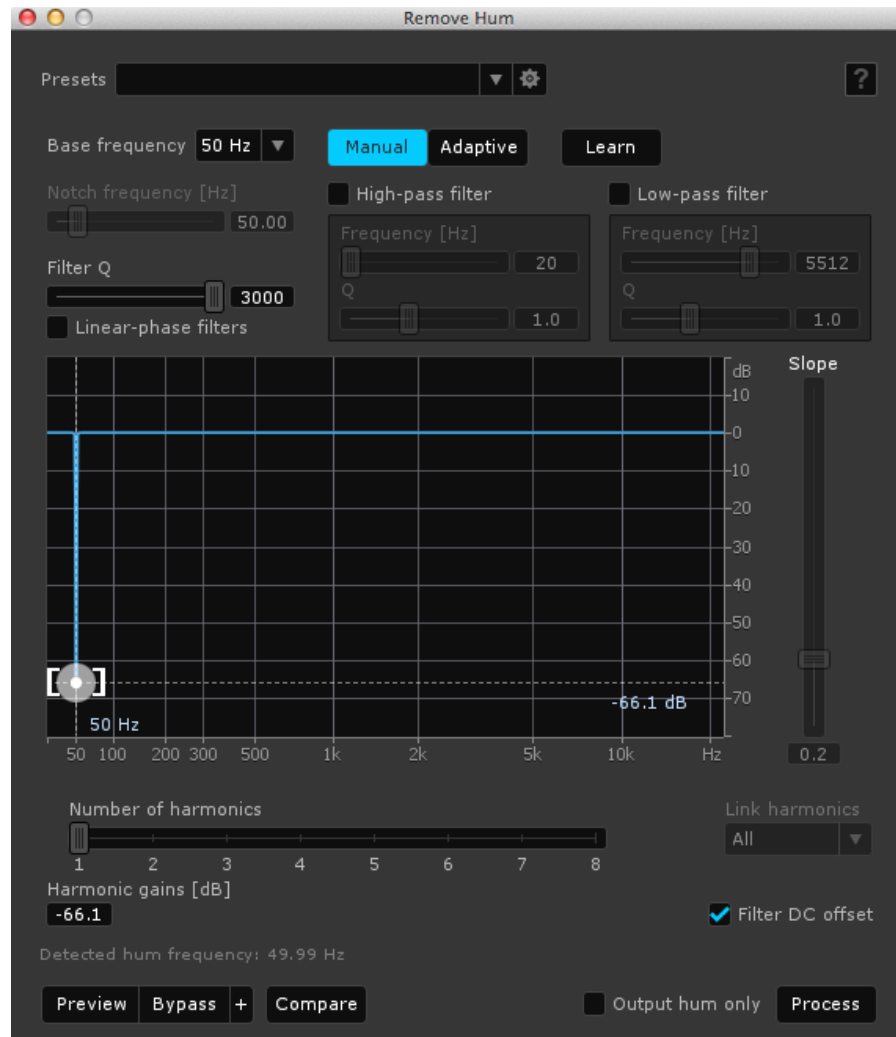

Next, adjust how aggressively Hum Removal attacks the primary frequency by pulling down the first frequency node. The deeper the cut, the more hum will be removed—but you may also adversely affect wanted audio in that frequency range, so tread carefully.


Step 3:

If you can see and hear additional harmonics, start reducing the gain of these as well.

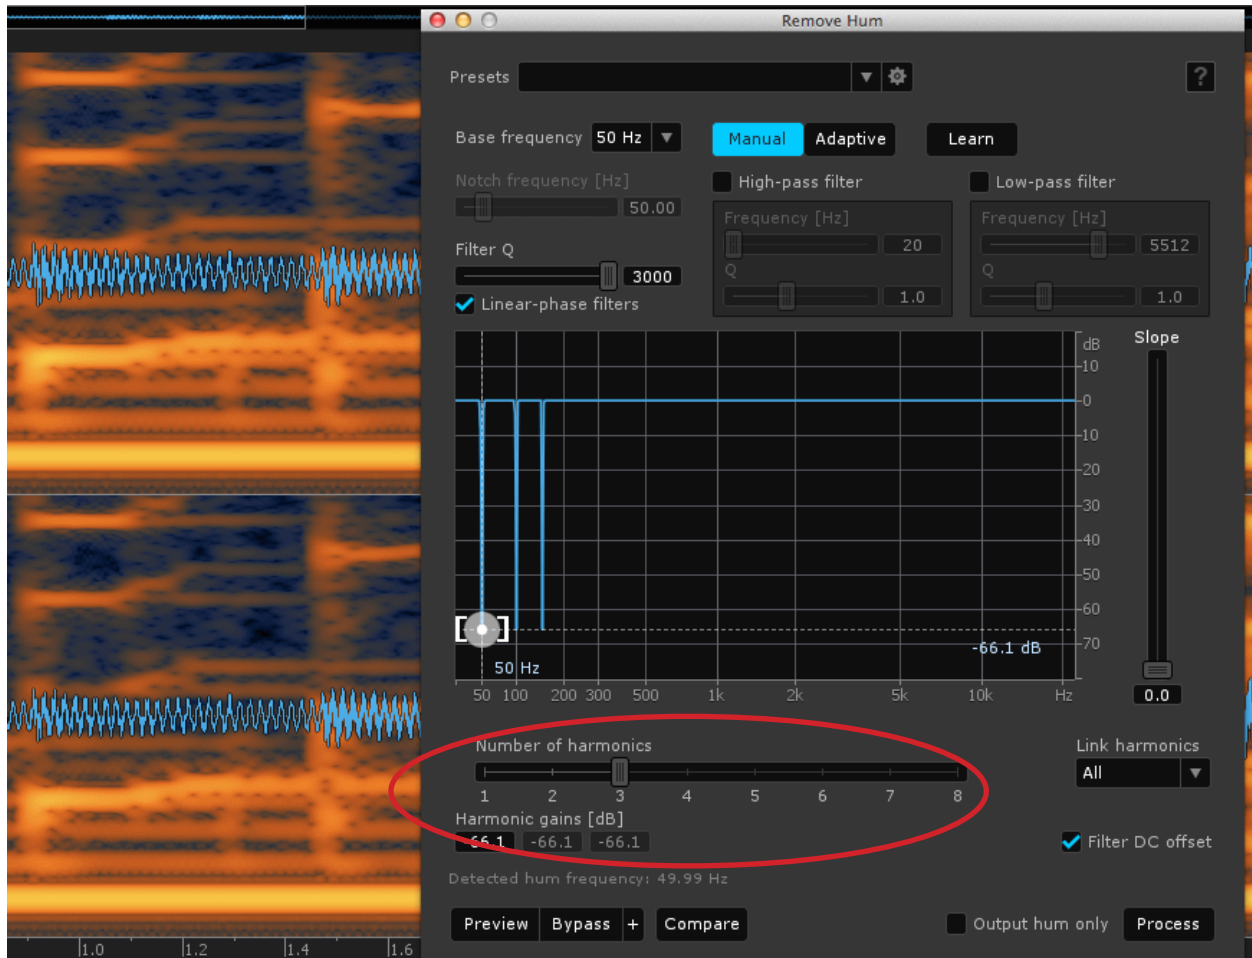

RX TIP • Use the Number of Harmonics control to select up to seven harmonics above the primary frequency. The spectrogram display makes it easy to identify the number of hum harmonics in your project.

Step 4:

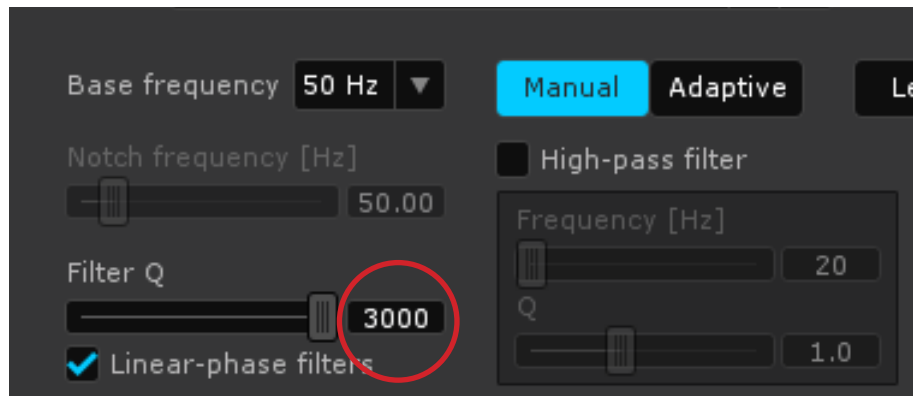

As you start reducing the additional harmonics, it's a good idea to ensure you aren't removing any desirable audio. A good hum removal tool allows you to adjust the "Q," or width value of the filters. Generally speaking, narrower filters will provide a better result, as they can more accurately notch out frequencies without affecting the surrounding audio. However, they also produce more ringing, i.e. time smearing of transients.

RX TIP • Use the Output Hum Only control to isolate and hear the audio that will be attenuated. If you hear any desirable audio creeping in, narrow the filter Q.

Output hum only

RX TIP • Filter DC Offset removes the DC (direct current) offset caused by the imbalance that sometimes occurs in A/D converters. DC offset is exhibited by the waveform appearing above or below the zero line, and is undesirable because it prevents you from achieving maximum audio levels. DC offset may also cause audible artifacts depending how the signal is being processed.


Filter DC offset

TONAL NOISE

Tonal noise, such as buzz from fluorescent lighting, is more difficult to trace back to a primary frequency and may extend up into high frequencies that are out of the scope of what RX 4's Hum Removal module can handle.

Tonal noise is different from the broadband noise discussed previously in that it tends to be concentrated at certain frequencies. For this, we can use the RX 4 Denoiser module, which gives us separate control over the tonal and broadband noise elements in a noise profile.

Below is a screenshot of a recording with tonal noise. As you can see, there are a lot of harmonics present:


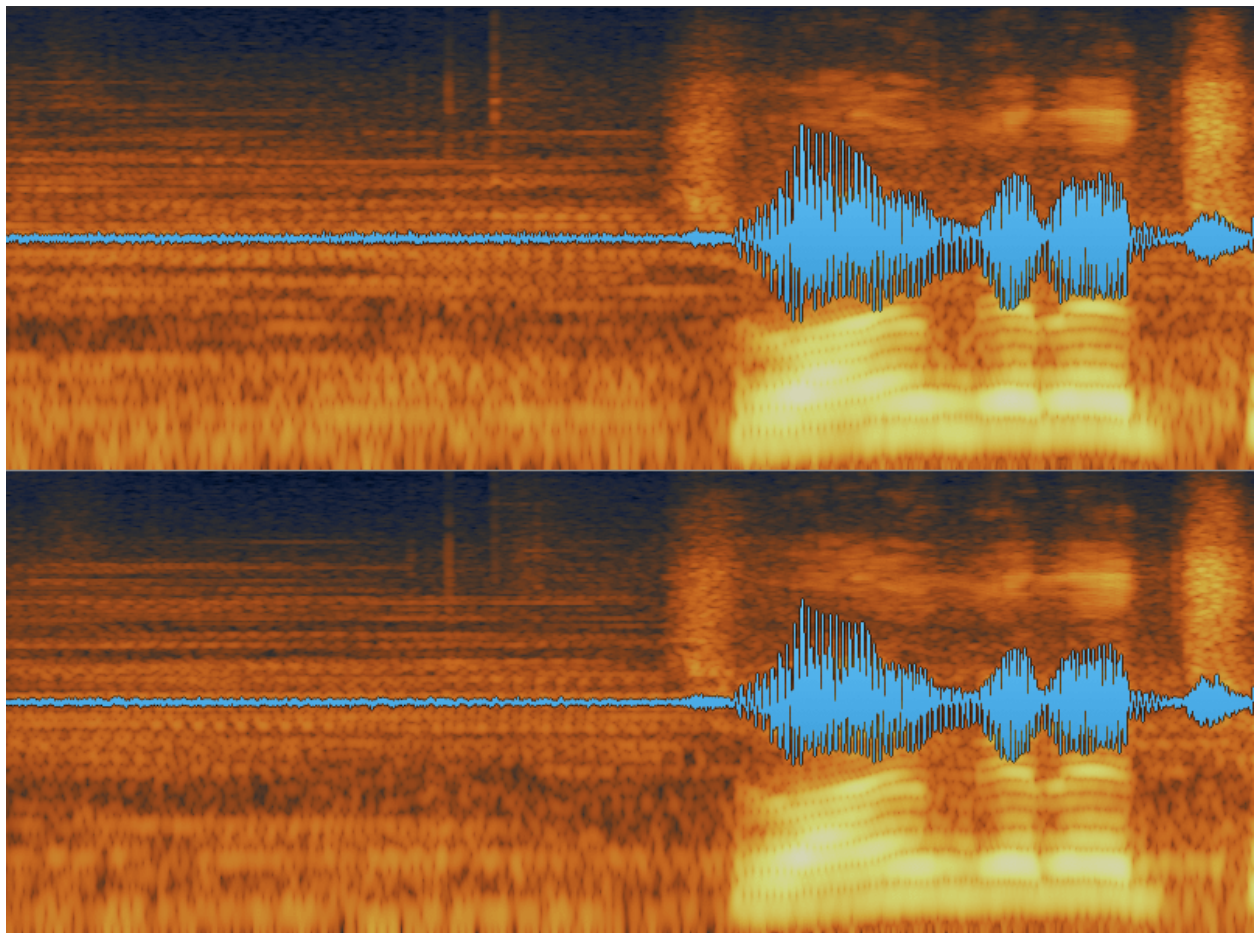


To remove Tonal Noise using the Denoiser, follow the steps for dealing with broadband noise outlined earlier in this chapter, but with the following additions:



- When adjusting the level of noise reduction in Step 2, de-link the sliders by clicking on the Chain-link icon. Then, increase the amount of tonal noise reduction using the now de-linked Tonal slider. This will start to clamp down more heavily on the tonal elements of your noise profile.

- Make sure the reduction curve is showing on the noise profile graph. Click the toggle box to show it. Now you may use this reduction curve as an envelope to notch certain areas of the noise profile to be affected more heavily. Where you see tonal peaks, you can direct the Denoiser to be more aggressive in those areas.

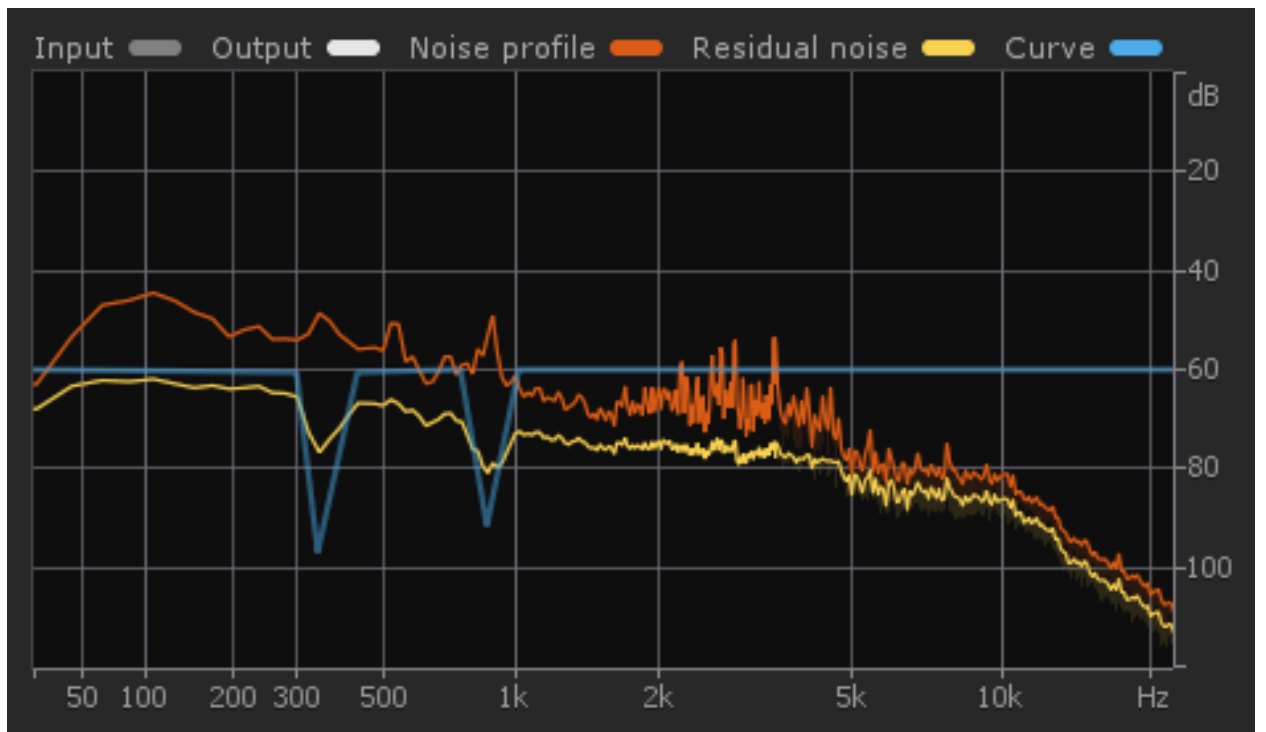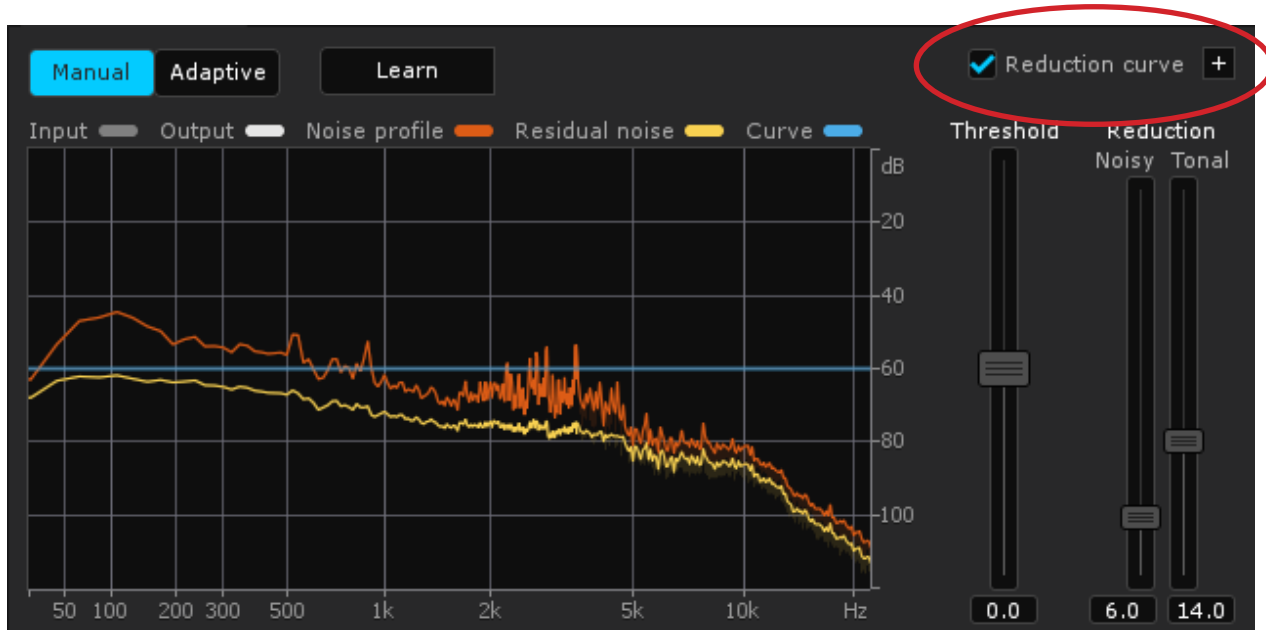

DIALOGUE DENOISING


Recorded dialogue may have broadband or tonal noise problems, so why not just treat dialogue with the aforementioned methods? Well, you can—and would likely get a good result!

However, as mentioned in the denoising chapter, some denoisers are designed specifically for use on dialogue and vocals. Because of the unique nature of voice recordings—plus our innate ability to hear the minute subtleties of the human voice—regular denoisers that might sound fantastic on music or other audio may not deliver the best possible results on dialogue and vocals. Dialogue-specific denoisers use custom algorithms better suited for vocals.

RX TIP • RX 4 includes a dialogue denoiser. We'll take a look at using it shortly.

Another reason for using a dialogue-specific denoiser has to do with workflow. In post-production projects, there might be tens or hundreds of dialogue regions in any given session. It's much quicker and more efficient to use a denoising plug-in in real-time than to destructively edit and then re-import so many files. Dialogue-specific denoisers are low latency and can run in real-time with minimal impact on system resources.

Step 1:

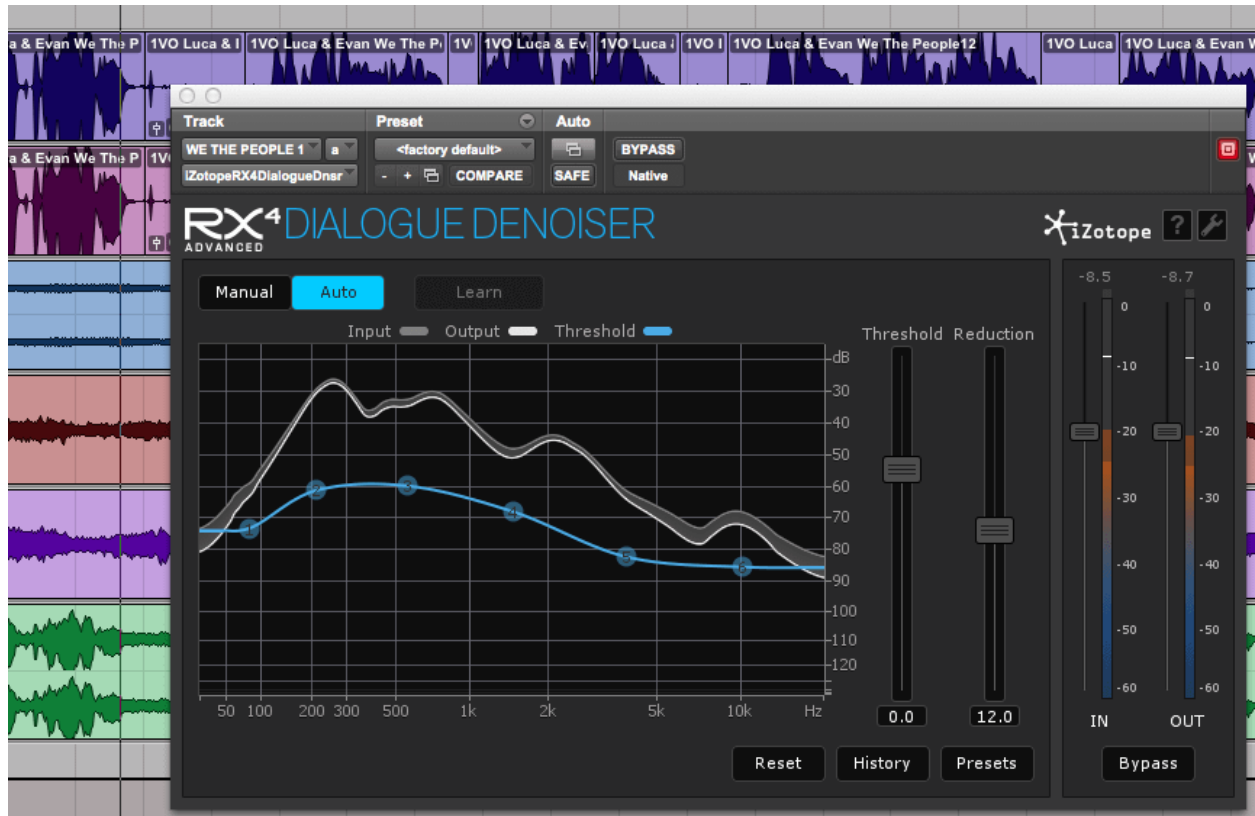


You can use the Dialogue mode in the RX 4 standalone application's Denoiser module, or use the dedicated plug-in in your DAW.


Insert your dialogue-specific denoiser on your audio track, and allow the audio to begin playing. iZotope's Dialogue Denoiser has two modes, Manual and Auto. Make sure you start with Auto.

A good dialogue-specific denoiser will offer multiband adjustment, allowing you to quickly adjust the amount of noise reduction applied to different areas of the frequency spectrum. In the Dialogue Denoiser Manual mode, you can adjust these controls.

This is useful if your audio has a lot of hiss or low-end rumble, for instance.

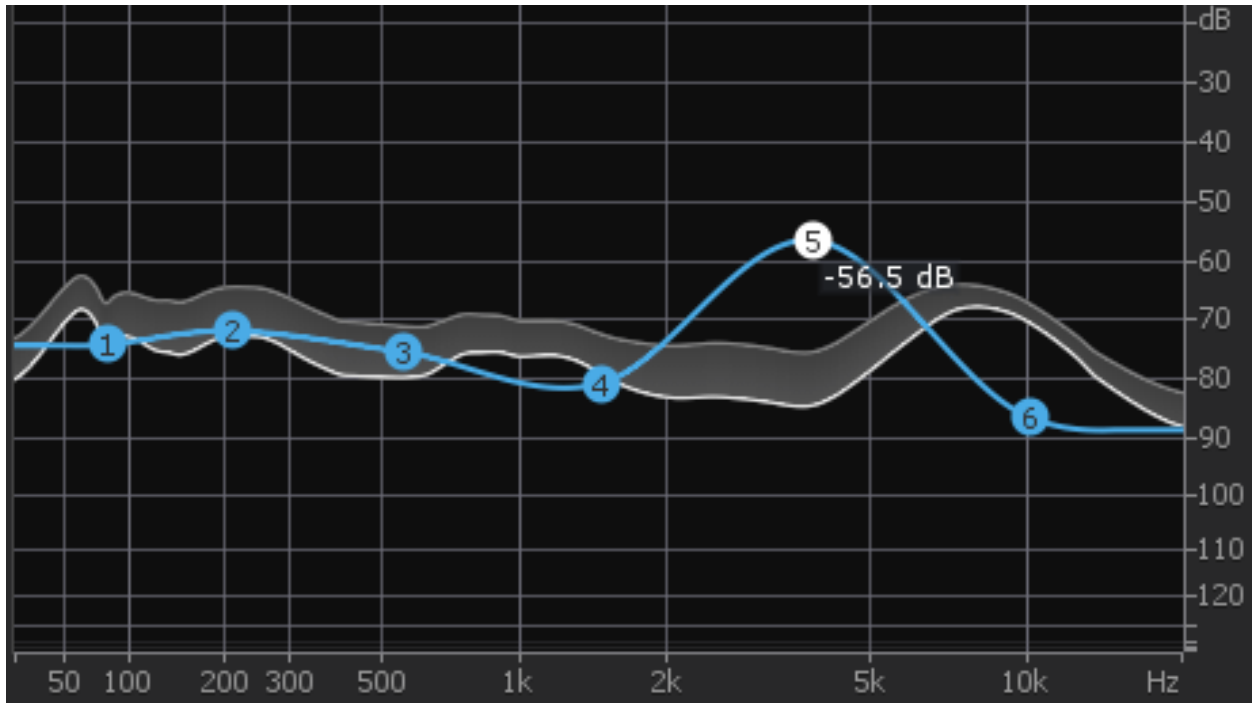


TIP • Apply gentler processing to the high-mid frequencies, as this tends to be where vocal artifacts are more audible.

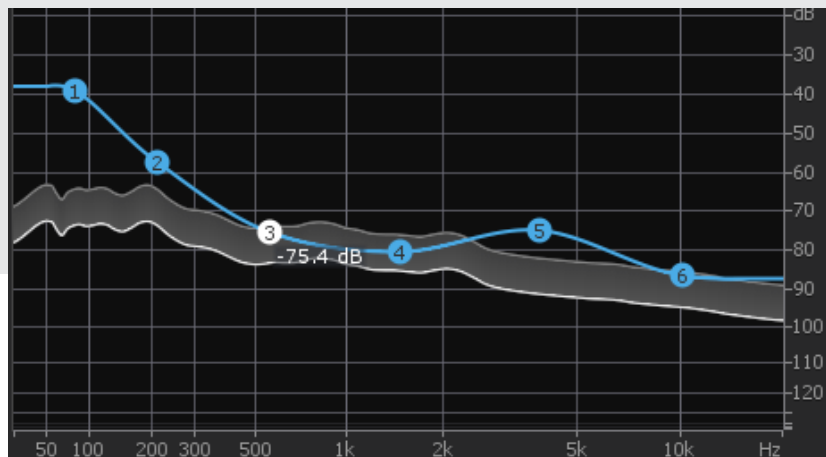

Step 2:

Increase the amount of reduction until you hear the noise begin to disappear. Listen closely, as you'll want to set the amount of reduction slightly below the level at which it begins to affect the voice.

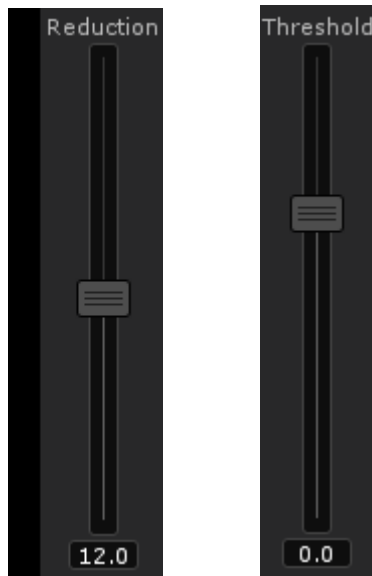

TIP • Remember that a higher value for the denoiser's reduction parameter doesn't mean more noise, it means more reduction (and therefore less noise).

If your denoiser has a threshold control (as the Spectral and Dialogue Denoisers in RX 4 do), adjusting it can help remove more noise with fewer artifacts.

A higher threshold value will reduce more noise, but suppress low-level signal components, so if you go too far, you may start to hear the ends of words being truncated slightly. A lower threshold value helps preserve these low-level signal components, but if you go too low, you may cause noise modulation. It's all about finding the right balance!

GENERAL DENOISING TIPS

1. Softly, softly. Be gentle and do multiple passes if necessary. This will often lead to a better sonic result than one harsh denoising pass.
2. Reduce with caution. The amount of reduction is the most important control, so listen very closely as you adjust it. It's possible to over-compress or over-saturate an audio signal using conventional mixing tools, and it's also possible to overuse a denoising tool.
3. Know your noise. Using the tips outlined above, identify the components of your noisy signal. Broadband noise and tonal noise require different approaches, so treat them accordingly.
4. Learning is good. Where possible, if time permits and the noise profile does not vary throughout, using Manual mode on a carefully learned noise profile can produce better results than Auto.

9: REMOVING INTERMITTENT NOISES AND GAPS

Intermittent noises can include a wide range of intrusive sounds that don't fall into the steady-state or impulse categories. These can include a cell phone ringing at a violin recital, a door hinge squeaking during an interview, or traffic noise interrupting the dialogue being recorded for a film.

Gaps, dropouts, and short sections of corrupted audio are also a common audio problem. These can be caused by everything from a loose audio cable to digital errors.

These audio problems tend to occur suddenly and last for a short duration—that's what differentiates them from the conventional noises we dealt with in an earlier chapter. We'll refer to the process of repairing these intermittent problems as audio repair.

WHAT'S THE GOAL OF AUDIO REPAIR?

Repairing audio involves carefully patching over troublesome areas and performing precise audio edits—all without causing audible artifacts that listeners may detect.

Audio repair might be performed for an obvious benefit, such as salvaging a live recording that suffers from an audio dropout or sudden and distracting audio event. However, the principles of audio repair can also be used for more subtle edits and enhancements. For example, removing springtime birdsongs from an audio recording intended to be set in the depths of winter, eliminating vocal plosives, and smoothing abrupt transitions in certain frequency areas are all ways in which audio can be polished in the post-production stage.


PRINCIPLES OF AUDIO REPAIR

No matter what software you choose, the audio repair process will require using some sort of visual editing tool(s).


Perhaps the most important is the spectrogram display, which is used to make precise selections of identifiable audio events. These precise selections can then be patched or repaired. If you didn't know how to read a spectrogram display when you started reading this guide, you probably now have a better sense of what they can be used for.

The tools that allow you to interact with the spectrogram are also important. Good audio repair and restoration software should include a number of selection tools, which you can use to draw or highlight specific audio events and frequencies that you observe on a spectrogram.

RX TIP • In addition to the common horizontal and vertical time/frequency selection tools, RX 4 includes several advanced selection tools, such as Lasso, Brush, and Magic Wand. These provide much more control over selecting sudden audio events that change frequency and move about.


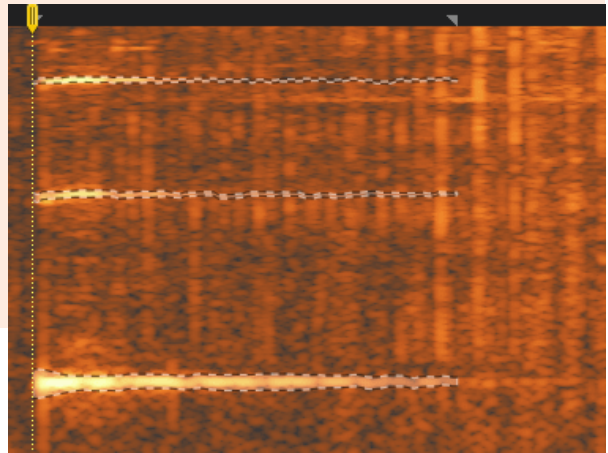


Terms such as brush and lasso are common across visual editing platforms. Here's what they mean in the context of audio repair:

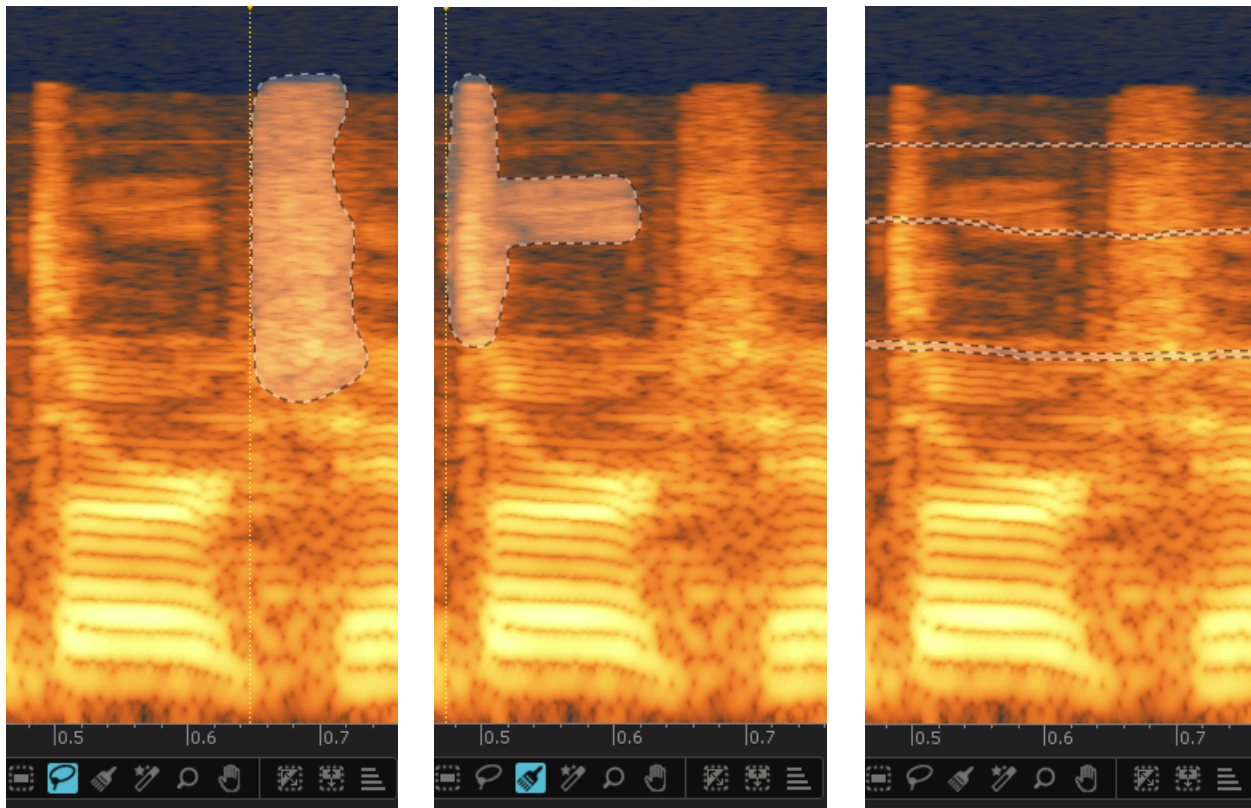

- **Lasso:** A lasso tool lets you use your mouse to outline a freeform selection of an image.
- **Brush:** A brush tool lets you use your mouse to outline a freeform selection with a defined brush size. The brush size is usually adjustable.
- **Magic Wand:** A magic wand tool lets you automatically and intelligently select a specific audio event within a spectrogram (or certain pixels making up part of an image).

Once you've highlighted certain events, the audio processing that follows represents the final step of an audio repair.

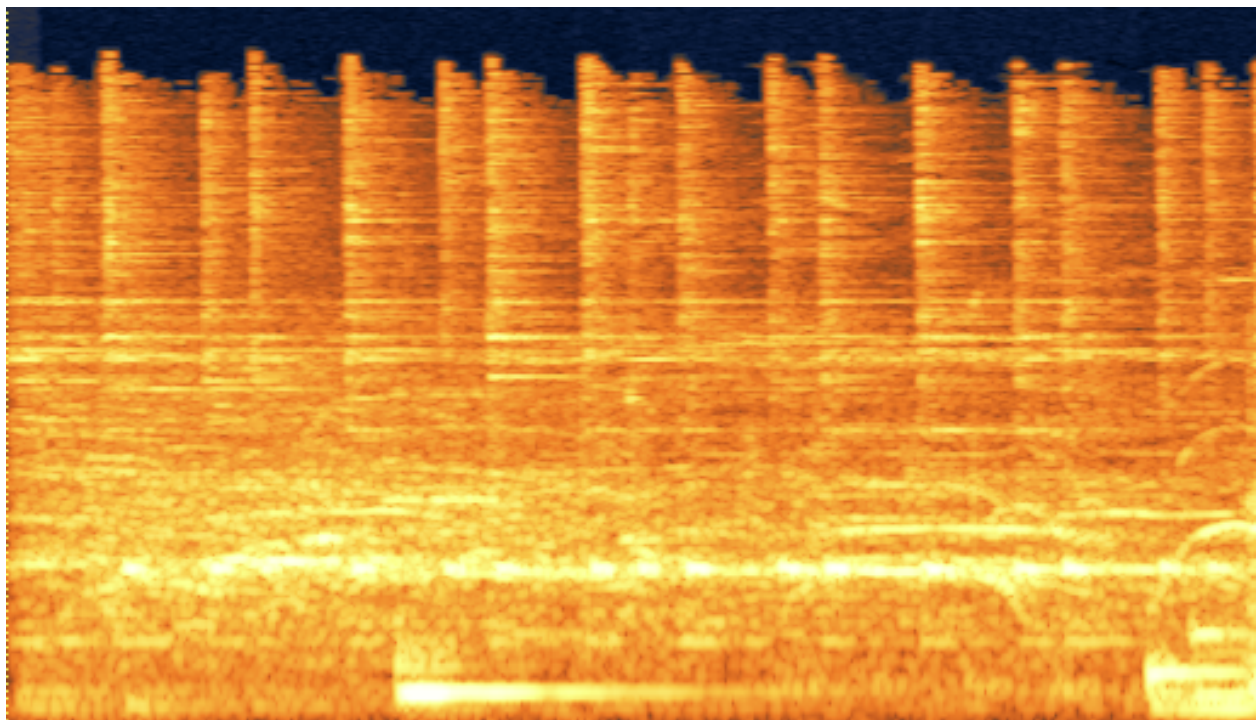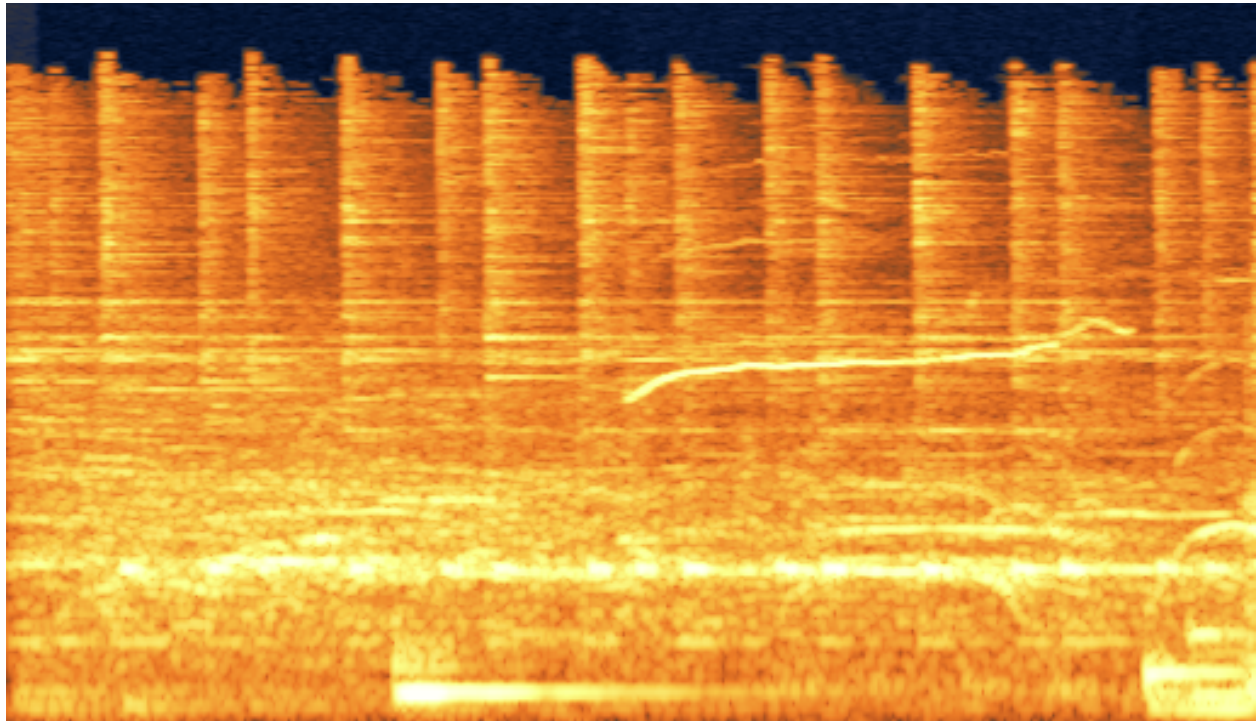

There are several things that make intermittent noises especially hard to fix:

- They can be wildly unpredictable in frequency and timing.
- Unlike broadband noise, hum, clicks, and crackles, noises like this can't be removed with an automated process and can be time consuming to fix.
- Most traditional audio editing tools cannot effectively remove them without leaving many artifacts or damaged audio.
- There's a lot of diversity between the audio repair methods and tools available, so it's worth checking out audio examples and downloading demos to find the right solution for your needs.

USING SPECTRAL REPAIR IN RX 4


In this chapter, we'll explore using the RX 4 Spectral Repair module to remove intermittent noises and fill in unwanted gaps. We'll begin with these algorithms as they work in particularly unique ways. Please note that other audio repair and restoration solutions may not include the following functionality, or might achieve the intended results differently.

The process of using Spectral Repair requires making precise selections using either the basic or advanced tools. If you're using Spectral Repair as a plug-in inside a DAW, note that it includes a built in spectral editor window that works in a similar way to RX 4's interface.


TIP • We strongly recommend that you try the Spectral Repair examples included in the Appendix, as well as the audio demo files that accompany this guide.

Spectral Repair offers four different algorithms that you can use for audio repair:


1. Attenuate is an intelligent gain adjustment. It can be used to push unwanted audio events into the background—particularly useful if the unwanted audio events don't completely obscure the desired signal.

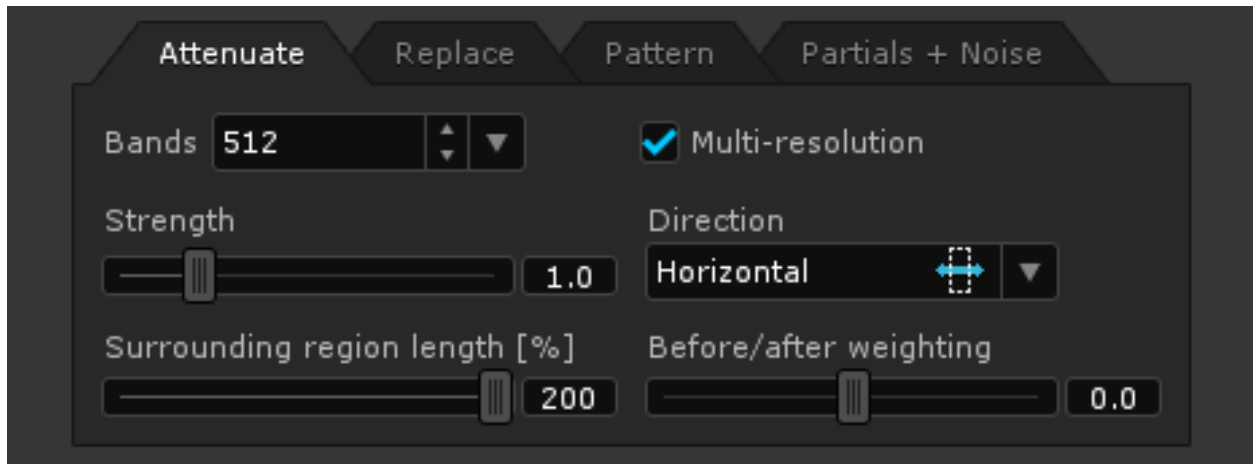

2. Replace is used to replace damaged audio, including entire gaps and dropouts. It can resynthesize audio using the audio information surrounding the damaged area.

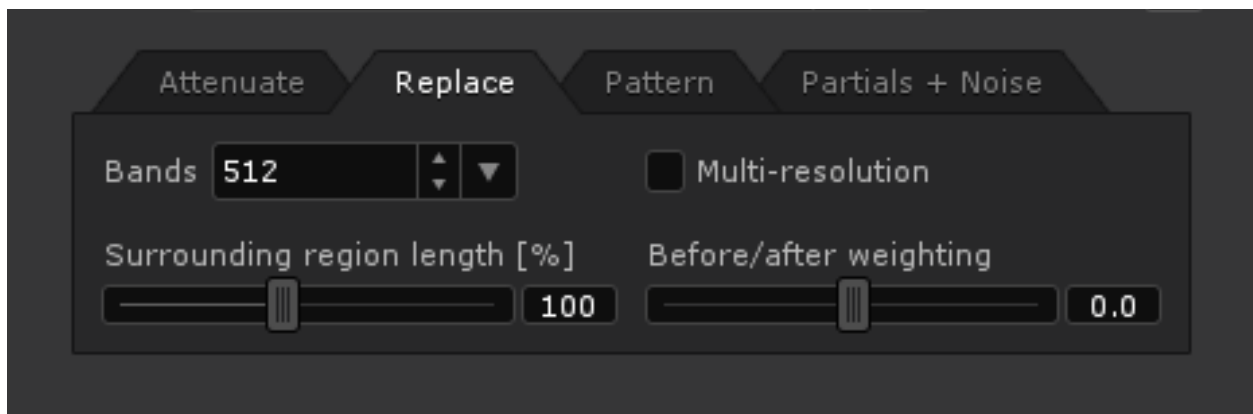

3. Pattern is suited to patching badly damaged audio that contains repeated components, such as instrumental vibrato. It's an intelligent copy and paste function that incorporates advanced blending techniques.

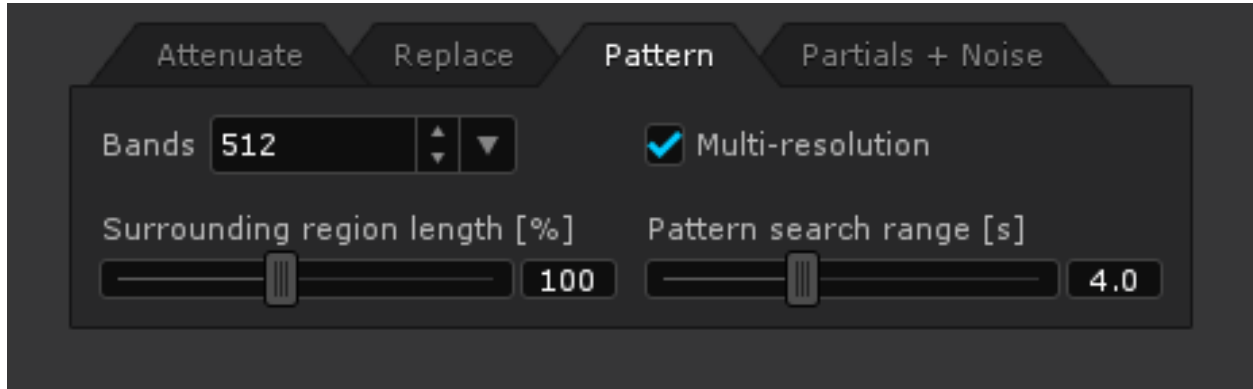

4. Partials+Noise is a more advanced version of Replace. It's more effective on heavily harmonic content, and focuses on detecting and resynthesizing harmonics.




INTERMITTENT NOISES

Step 1:

Begin with identifying unwanted noise in the spectrogram. See the spectrogram chapter for more details on using the spectrogram to hone in on different types of problematic audio.

Using the selection tools, isolate the noise as precisely as possible. You can either draw a freehand selection around the edges of the unwanted audio, or use the Magic Wand tool in RX 4 to make the selection automatically.

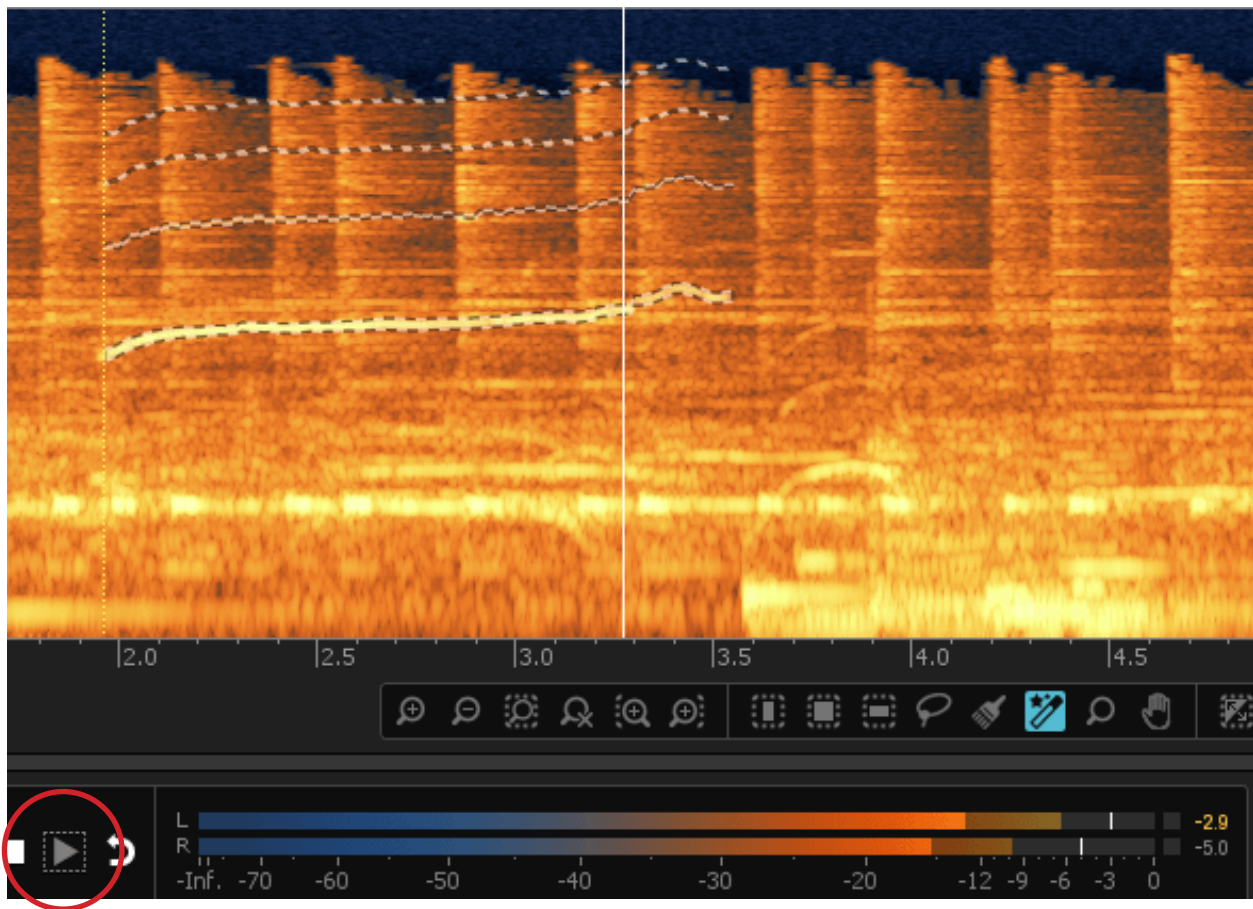


RX TIP • Use the Play Frequency Selection tool to play back the selection of audio in the spectrogram. This helps to determine whether you've correctly set the boundaries for the selection.

Step 2:

Once you've isolated the unwanted noise, open Spectral Repair and ask yourself the following questions:

- Do you want to push the noise gently into the background? If so, use Attenuate to process the selection.
- Do you want to completely remove the noise? If so, use Replace or Partials+Noise to process the selection.

As a general rule, Replace is a good starting point for removing sounds entirely. Partials+Noise might be a better choice if the surrounding audio is heavily harmonic—like a chair squeak from a live orchestral recording.

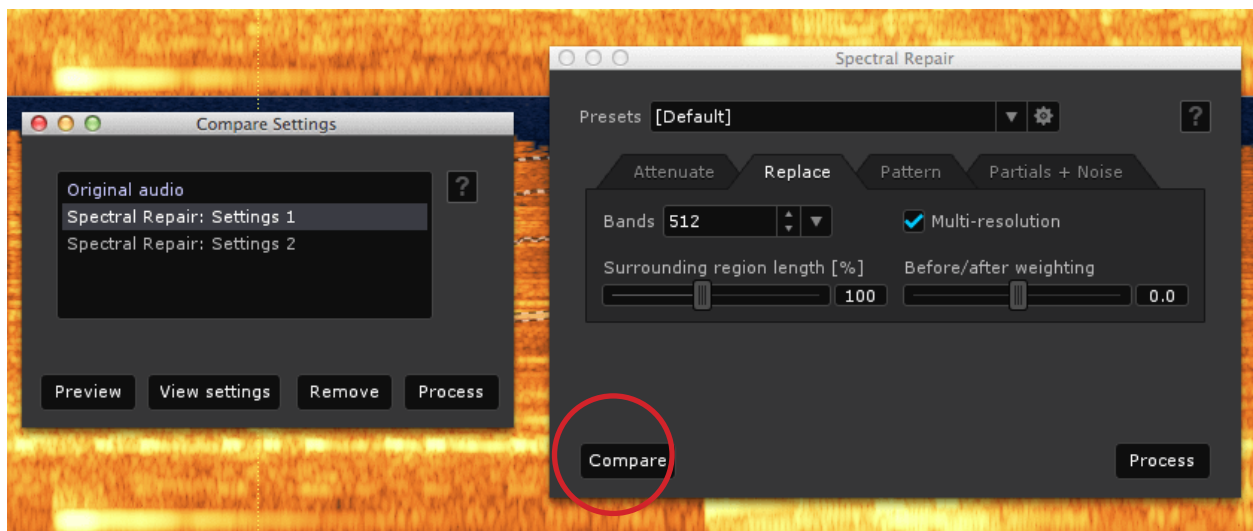

RX TIP • Using the Compare function will let you quickly A/B the results of your chosen modes and settings whilst experimenting with audio treatments.

Step 3:

Now that you've identified, isolated, and treated unwanted noise, it's time to play back your audio. Listen out for any changes that may have been made to the desirable audio, such as the introduction of artifacts.


Remember that listeners will only hear what you've left in the mix, and not what you've taken out. If you fail to identify and treat leftover artifacts, they may distract the listener. It's important to make an edit sound as seamless as possible!

Step 4:


Removing the noise can usually be done in one pass.

In other cases, you might need to do a couple of patch repairs to remove the problem entirely


In this image, the unwanted noise is a bicycle bell. You can use one pass to remove the ring of the bell, which is visible as a collection of horizontal frequencies.

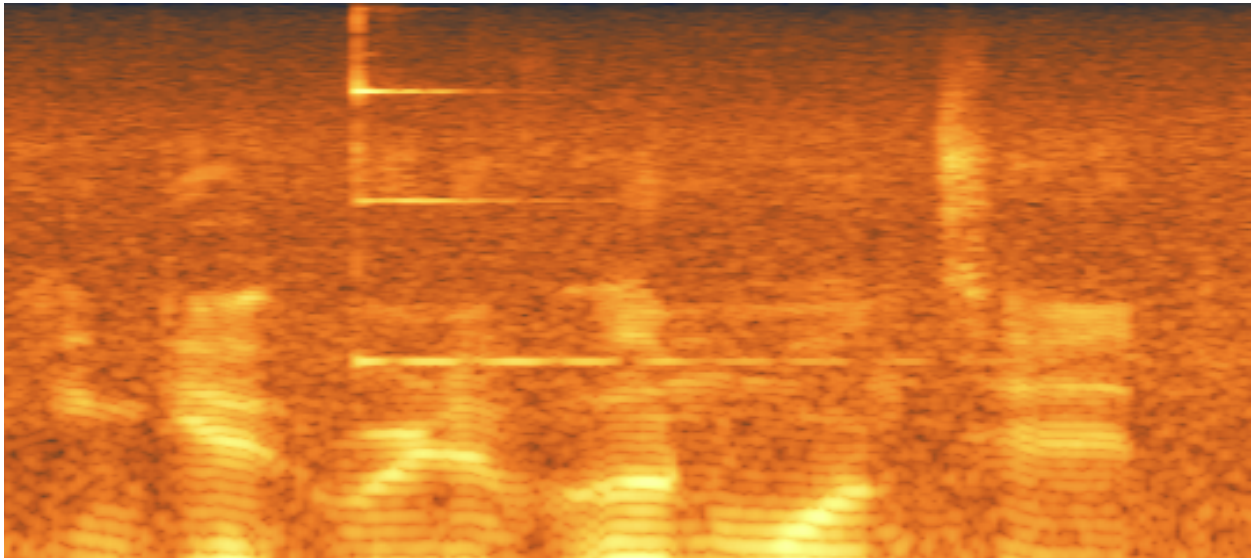

In this second pass, you can select and patch the initial attack of the bell, which is a more mechanical sound.

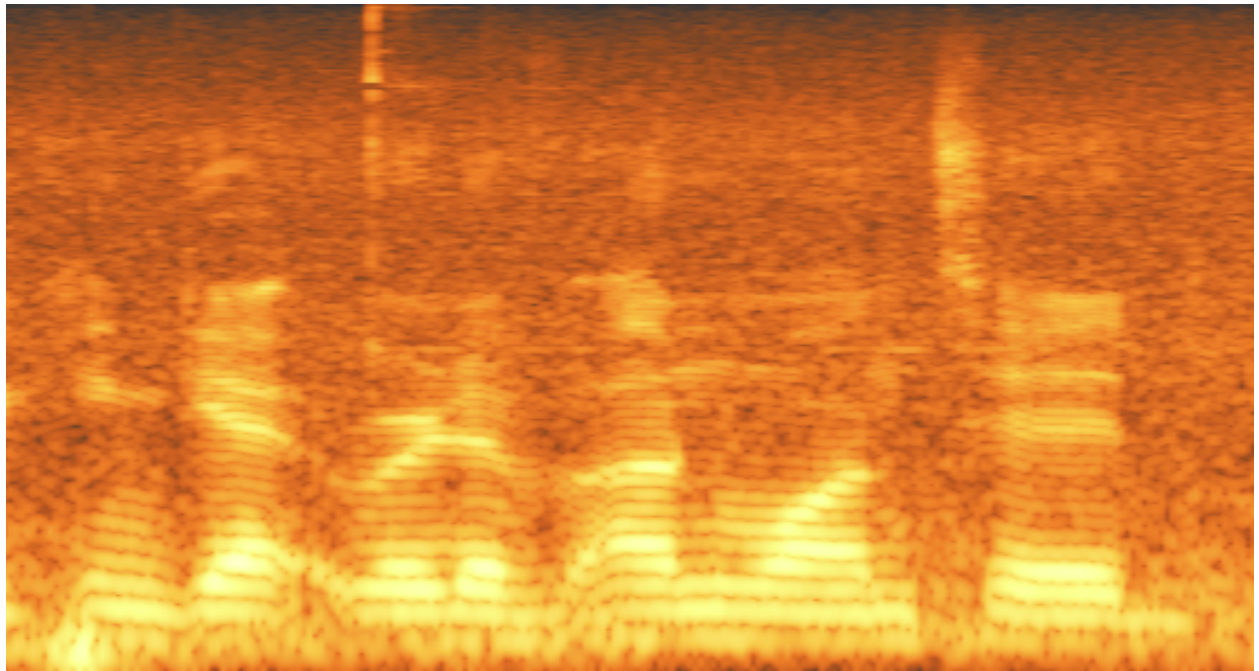

Understanding the different components that make up unwanted noise can help you identify how best to treat it, and whether one or several passes would be most effective. This process is similar to how you identified different types of noise and the ways to treat it in the chapter on denoising.

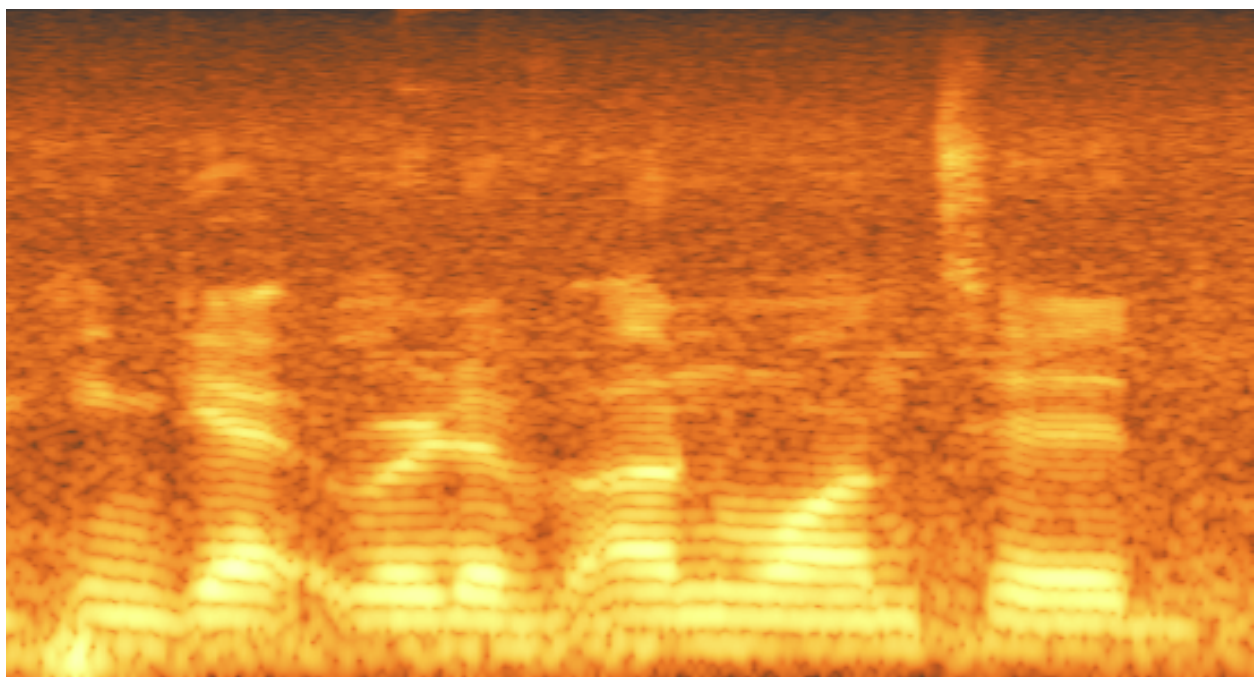

AUDIO DROPOUTS

Step 1:

Audio dropouts are easily spotted in either a waveform or a spectrogram view.

Working with a spectrogram view does make the repair process easier.

First, you'll want to make sure you have the gap highlighted. A full-bandwidth selection tool is most preferred for this, and you should highlight a very small amount of audio to the left and the right of the gap.

TIP • It's best to select a small amount of audio to the left and right of the gap as clicks will be present. This is a result of the waveform being interrupted between zero crossings. This technique also helps hone in on material that will later be replaced.

Step 2:


Once you have the audio gap highlighted, ask yourself these questions before processing:

- Is the audio fairly steady, with low harmonic content? If so, use Replace to process the gap.
- Does the audio have a repeating pattern, such as a vibrato? If so, use Pattern to process the gap.
- Does the audio seem suited for treatment with Replace, but is much more harmonically intense (like music)? If so, use Partials+Noise to process the gap. Replace always connects harmonics from two sides of the gap horizontally, while Partials+Noise can connect frequency-varying tones, more common in music.


Step 3:

As mentioned above, listening back is important—particularly when performing repair on full bandwidth audio dropout.


Repairing the audio dropout may work the first time, but sometimes you may need to do a couple of passes.

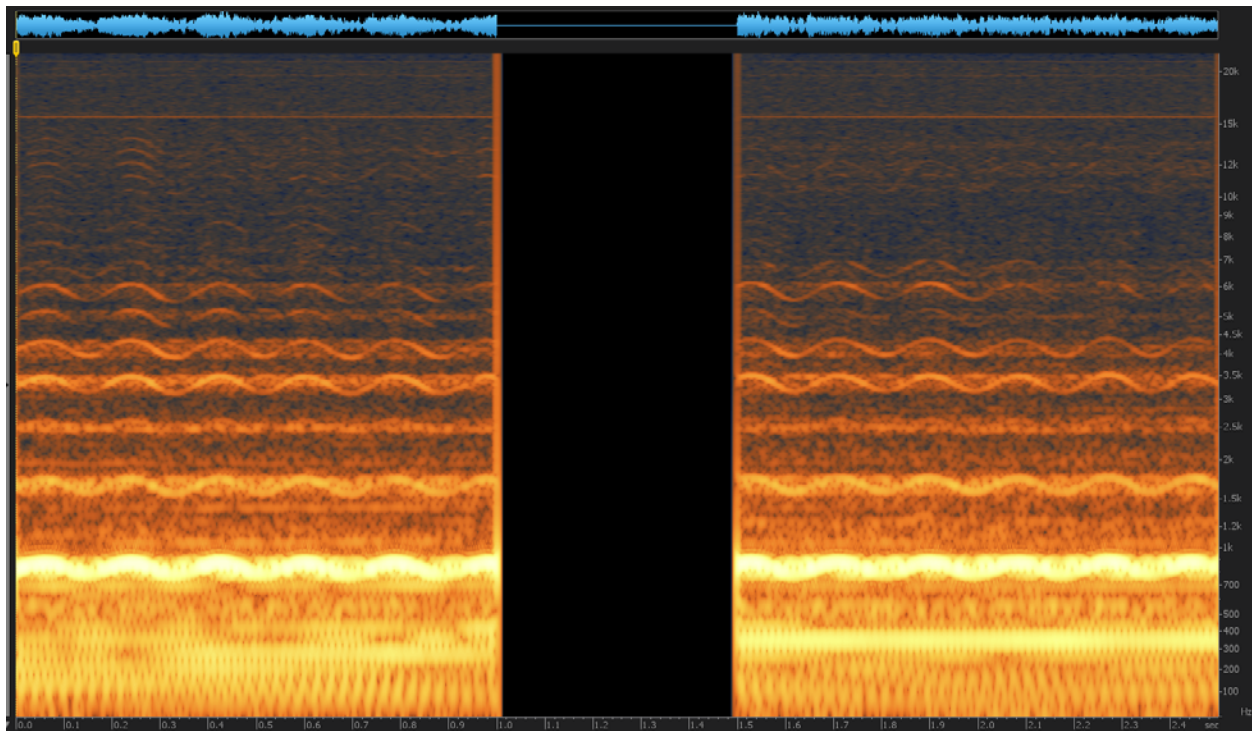


For instance, in the above image, we have an opera singer and an orchestra. Pattern was used to replace the dropout, resulting in this:

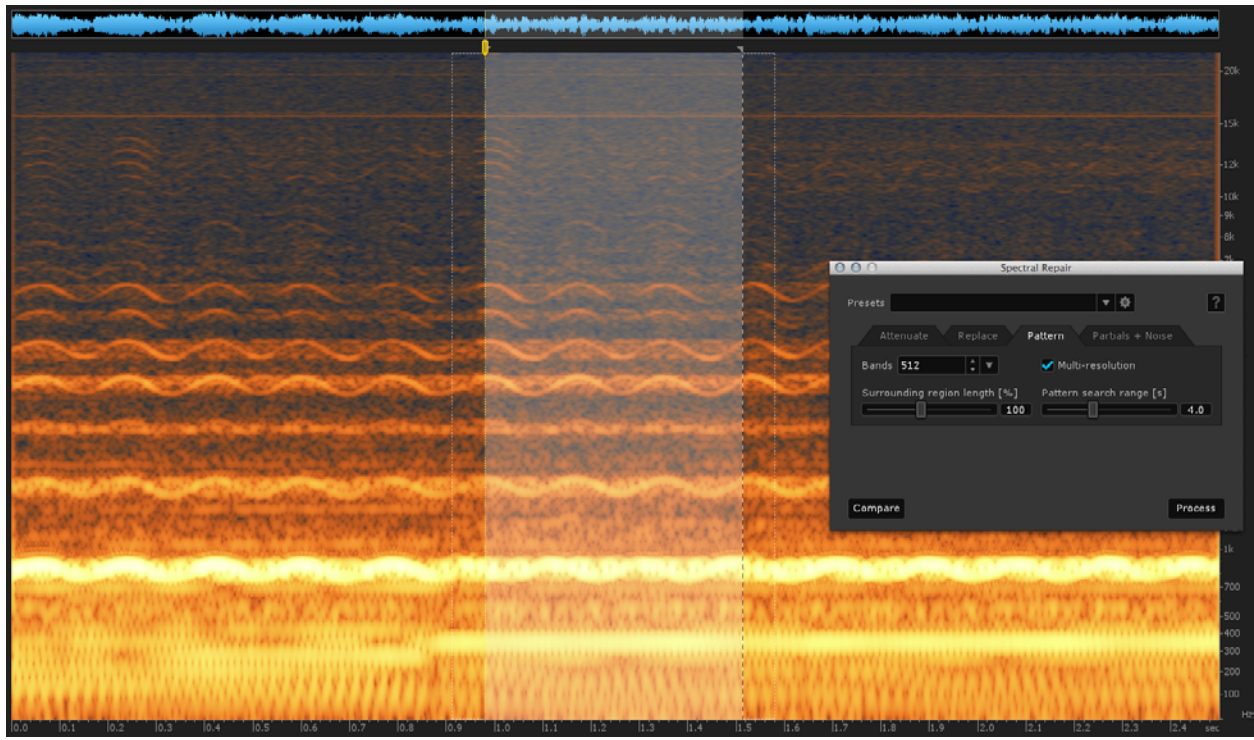


Although this may sound good, we can see that the slowly evolving orchestral chord has been repaired abruptly.

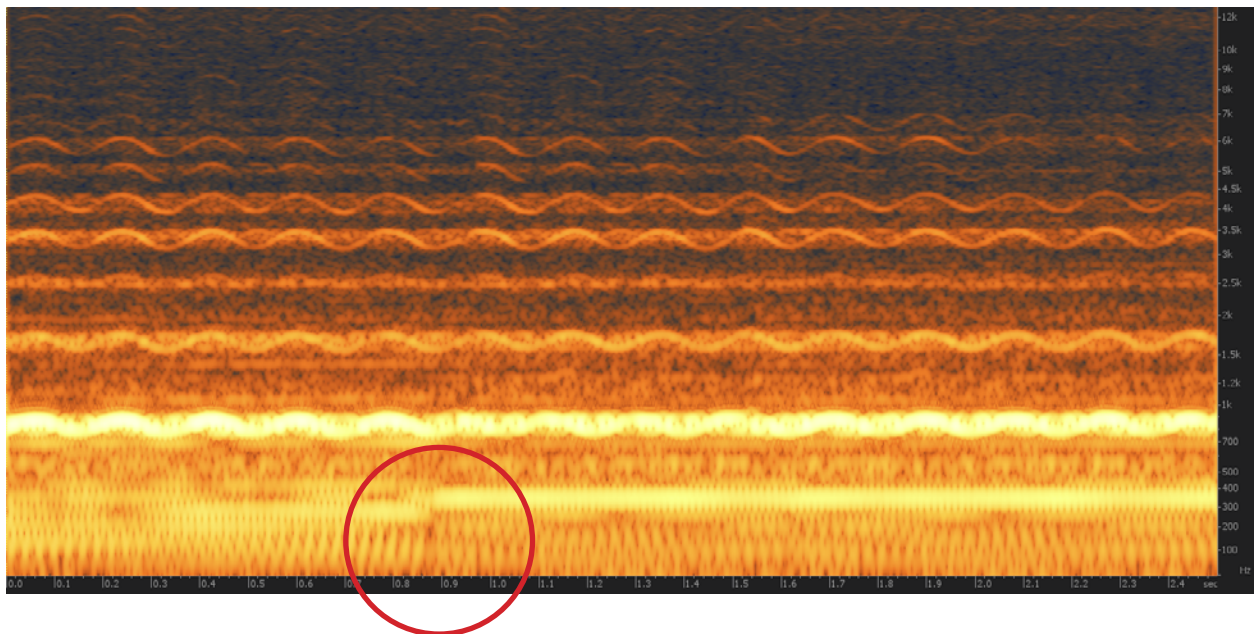

In situations where a whole signal does not transition smoothly, it's advisable to perform a second pass.

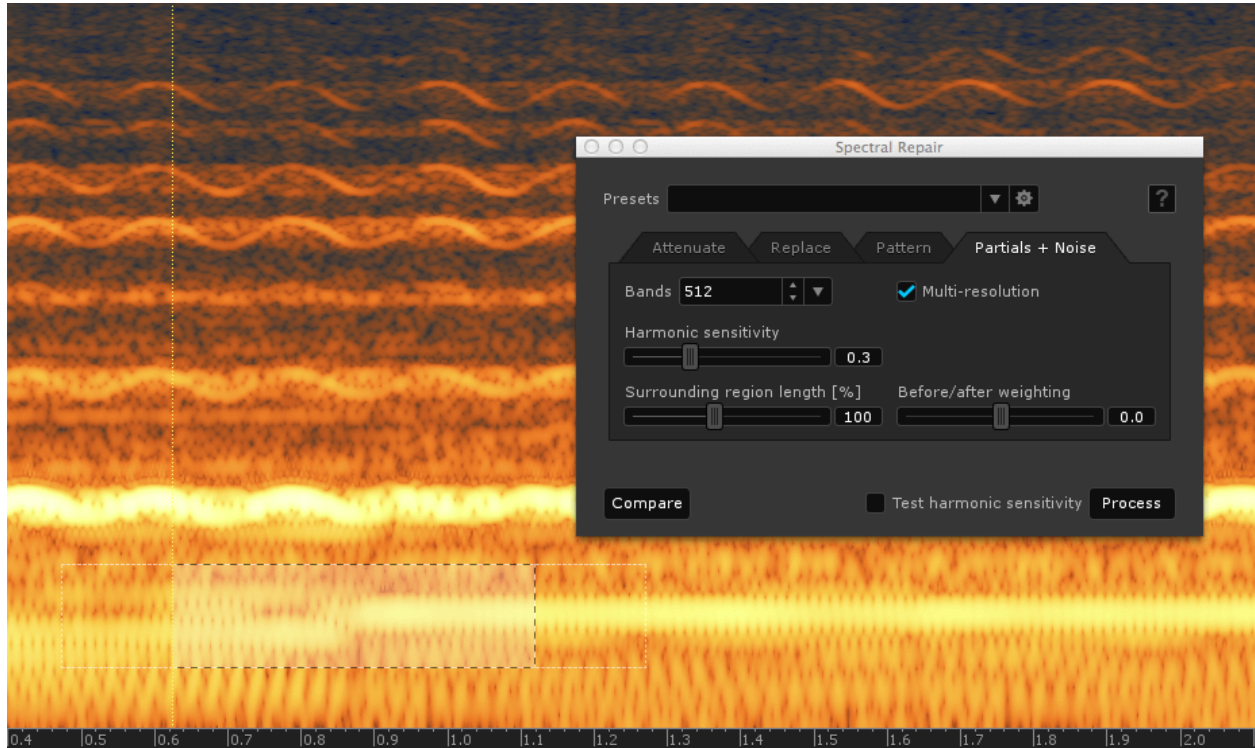


In this image, the audio dropout has been repaired and some additional steps have been taken to ensure a seamless edit.

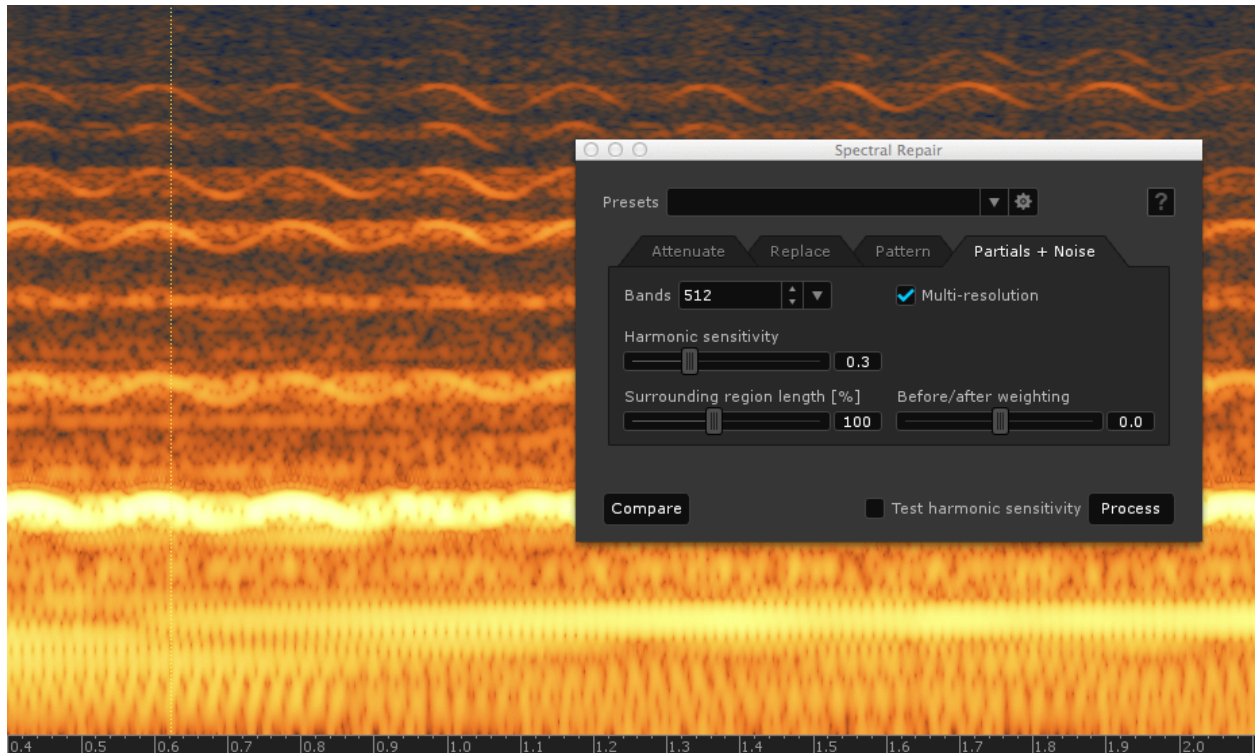


GENERAL AUDIO REPAIR TIPS

1. Trial and error is good. Although you'll likely get great results the first time around, you'll become more effective at using Spectral Repair the more you experiment and work with it.

2. Provide more information. If you fail to get a perfect result first time, simple tricks like extending the surrounding region length parameter may help.

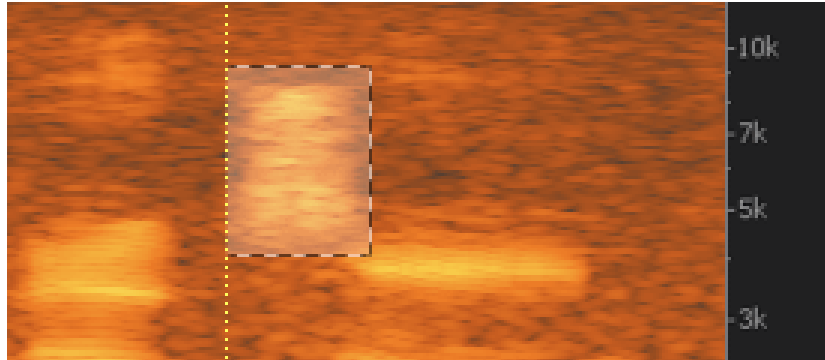

3. Look around you. If a noise only takes up a certain area of the frequency spectrum (between 5–8 kHz, for instance), you might get a more transparent result performing area-specific spectral repair, rather than full bandwidth repair. This is because the audio surrounding the area being patched (anything below 5 kHz and above 8 kHz in the above case) is left unaffected and will help smooth over the transition.

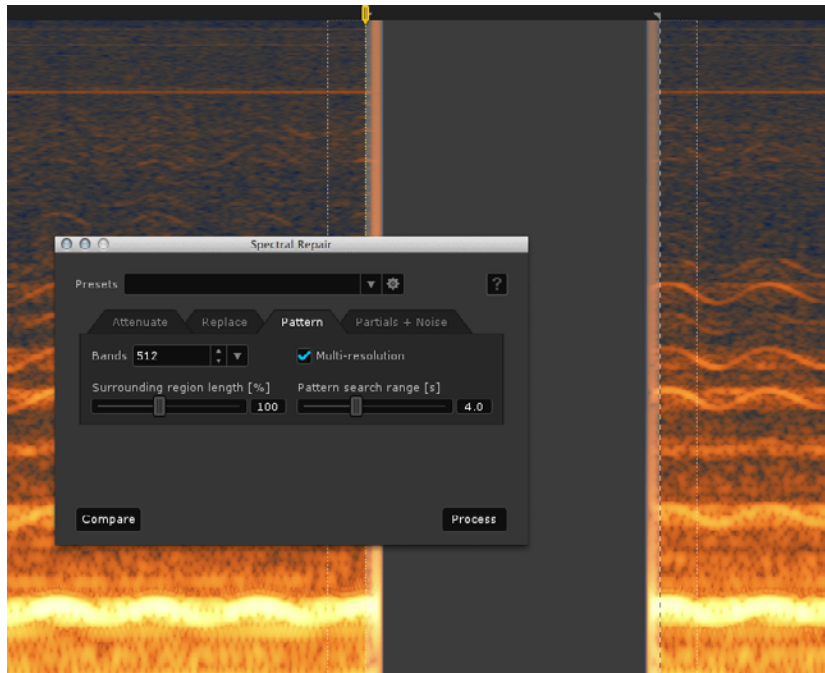

4. Keep it simple. For example, you might find that plives are better treated using the Gain module by simply turning the gain down to zero. But most times, Spectral Repair is the answer—its default parameters are well designed and are effective without too much fiddling!

10: REMOVING CLICKS AND POPS

Clicks and pops can occur at almost any stage of the recording process. They can be caused by surface noise from mechanical media (especially discs), static electricity, power lines, cell phones, mouth noises, inadvertent physical contact with a microphone, and bad audio connector cables. Occasionally, digital errors will result in unexpected clicks, too.

WHAT'S THE GOAL OF REMOVING CLICKS AND POPS?

In the case of old analog playback mediums such as vinyl or shellac records, clicks and pops are understood to be commonplace. It's extremely difficult to obtain a perfect analog to digital transfer of an old record without including clicks and pops. In this example, the goal is to remove the extraneous clicks and pops that might distract the listener, and still retain the true character of the original audio.


TIP • Many are nostalgic about the sound of vinyl. For this reason, there exists dedicated software that makes digital audio sound as if it were playing from an old record. iZotope Vinyl helps achieve this sound, and was iZotope's first ever plug-in—released in 2001. It's available for free from the iZotope website, at www.izotope.com/vinyl.

Clicks and pops that are caused by digital errors or interferences have the potential to render audio useless. Listeners are far less accepting of clicks and pops caused by such errors, as they not only sound different, but are not expected in commonly pristine digital audio.

In the case of mouth noises, removing clicks helps improve the general sonics of a vocal recording. Professional vocal talents are often highly skilled at controlling mouth noises, but clicks from the mouth are usually a perennial problem in dialogue editing.

PRINCIPLES OF REMOVING CLICKS AND POPS

Removing clicks and pops effectively is not possible with conventional tools, nor is it possible by notching with a precise EQ. This is because clicks usually cover a wide frequency bandwidth and are extremely momentary.

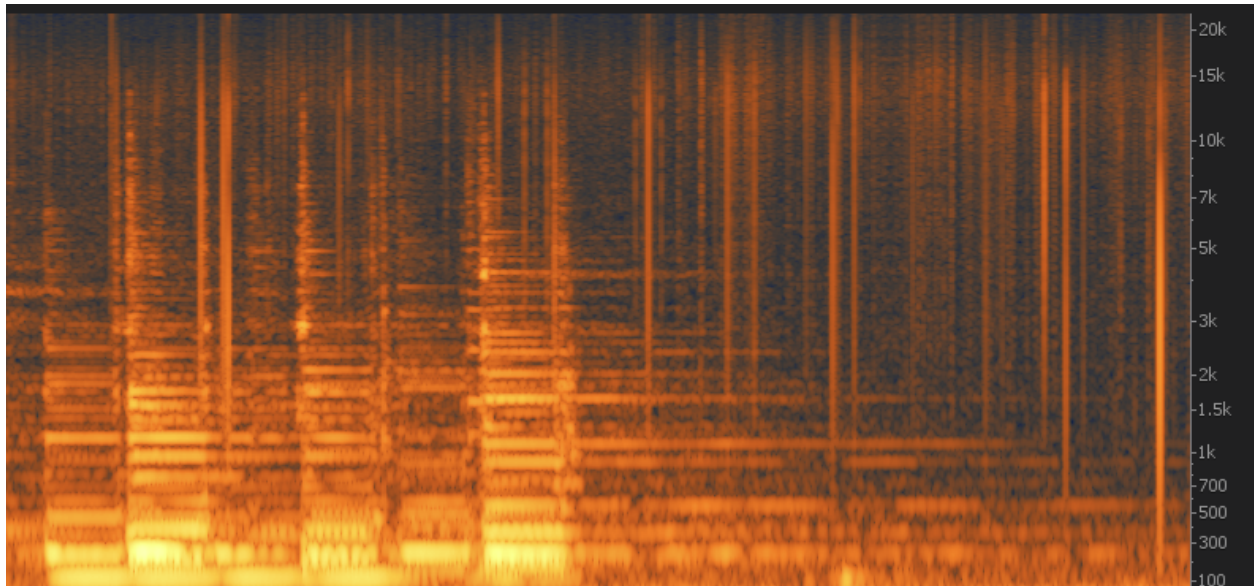


Declicking tools are designed to identify and recognize the sonic signature of a click, enabling the user to then attenuate or remove it entirely, either one by one, or by processing the entire audio file at once. Some declickers may have a single mode, but a good declicker should have several different modes optimized for dealing with the variety of clicks mentioned above.


USING DECLICK IN RX 4

The Spectral Repair chapter explains how to eliminate certain clicks and pops, but for other kinds of distractions, an even better tool is available for use. The Declick module in RX 4 repairs and reduces clicks, pops, and other impulse noises within the waveform. It has three modes: Declick, Decrackle, and Interpolate. For clicks shorter than a few ms, use Declicker. For clicks longer than a few ms, use Spectral Repair.


RX TIP • Declick automatically reduces the vast majority of clicks. There are several options in the RX 4 Declicker that combat these, and we'll explore them all shortly.

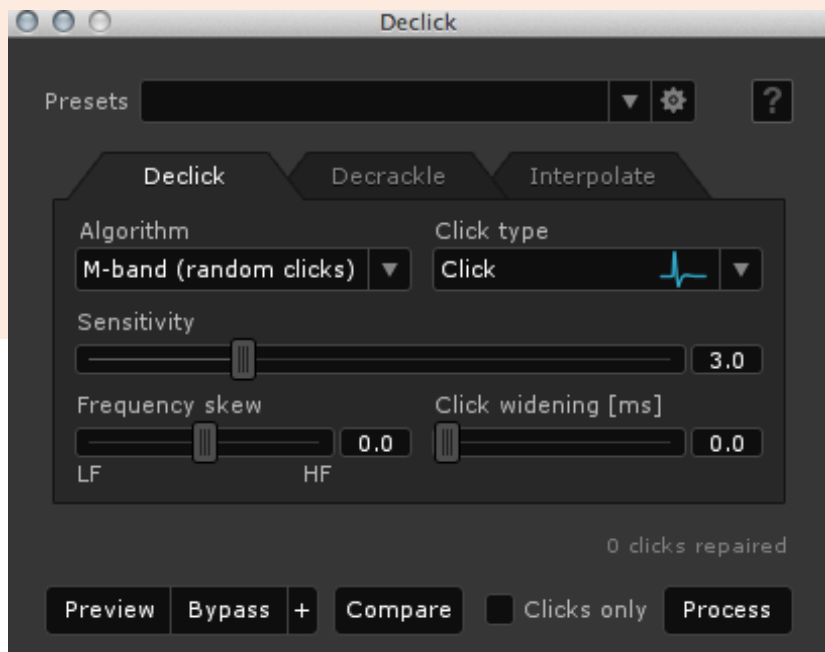


RX TIP • Decrackle removes repeated, quieter clicks that blend together to form what we perceive as crackle.

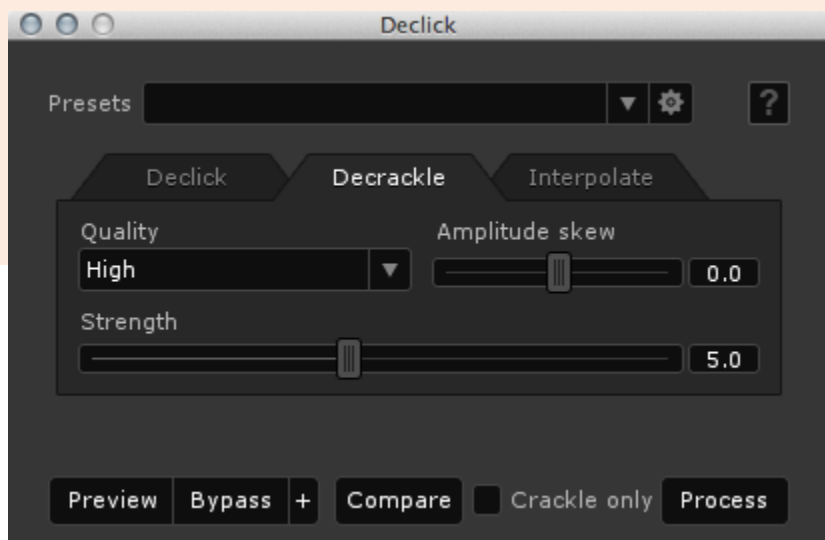

RX TIP • Interpolate performs one-off manual click repairs that Declick is unable to treat. Interpolate can also be used to fix very slight audio dropouts.

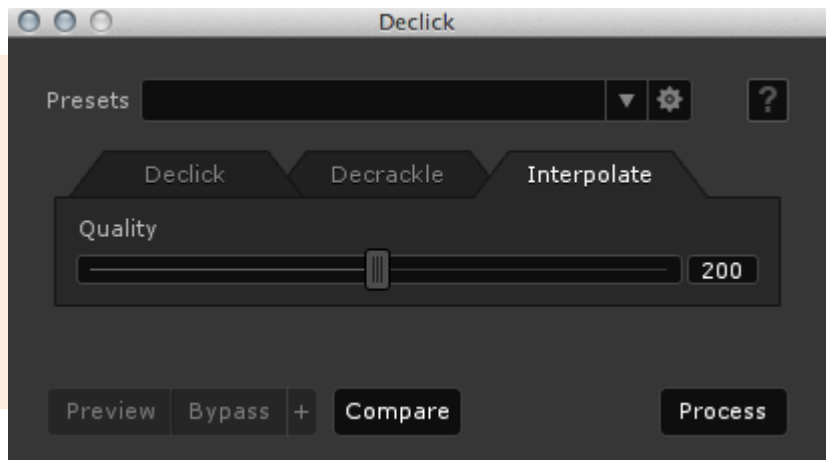


Clicks occurring in the analog domain, whether caused by the surface of a mechanical playback medium or a mouth, are sonically and visually different to digital clicks.

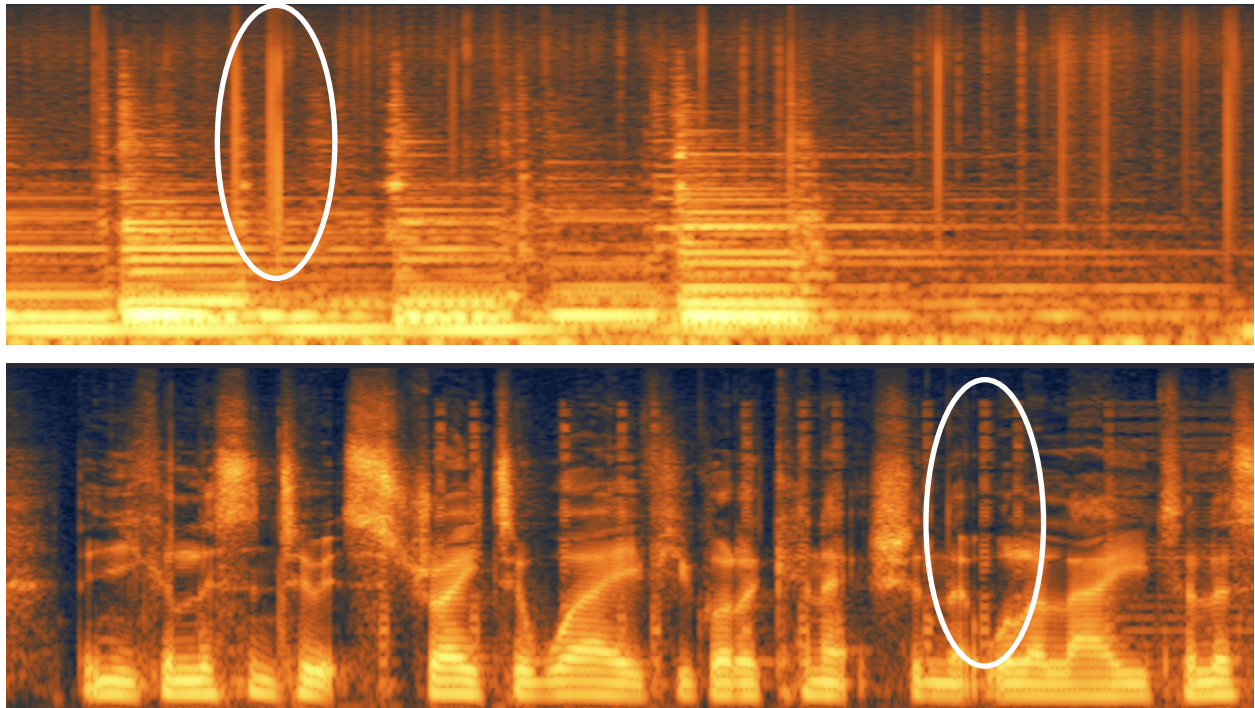

The first image demonstrates a click that occurs during playback of a vinyl record. It's a solid frequency event on the spectrogram, and can be considered random.


The second image demonstrates a click that occurs as a result of cell phone interference. When zoomed out, it appears similar, but if we zoom in, we can see that the single click is actually a very short, periodic signal.

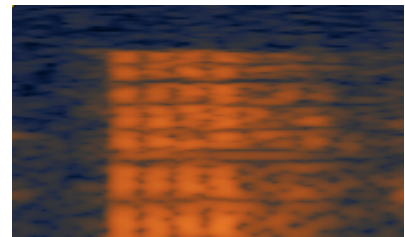

The RX 4 Declicker features both a Random and a Periodic mode that you can use to tackle these problems respectively.

ANALOG CLICKS

Step 1:

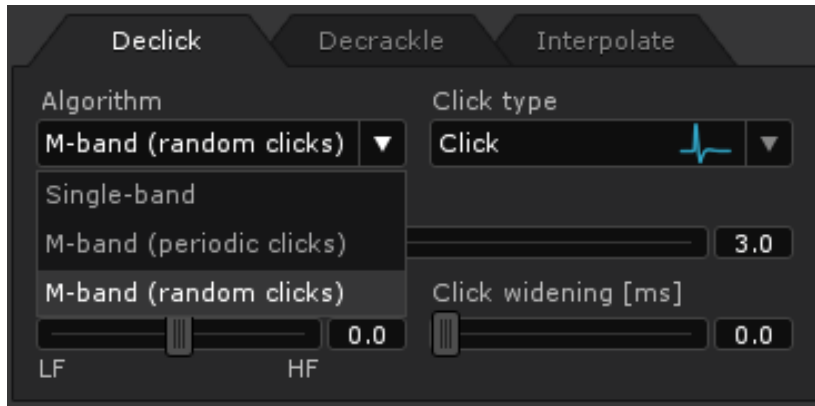


Open Declick. Select the Declick tab, and then select M-band (random clicks) mode.

“Click” will be the click type selected by default. If you believe that the click is being caused by a low-end thump, you should select Thump as your click mode instead. The third option, Discontinuity, is ideally suited to clicks caused by bad audio cuts that have missed a zero crossing.

Step 2:

Before adjusting the strength beyond the default settings, click Preview to hear the result of the processing on your audio file. Many declickers will offer an appropriate level as a starting point.

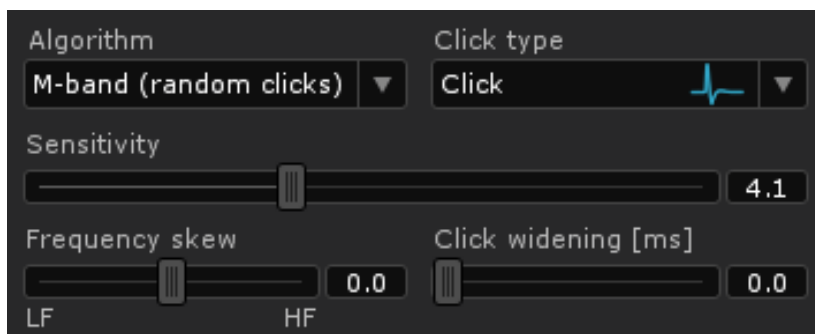

As the audio plays back, you can adjust the strength of the declicker up or down. Higher values will reduce more clicks.

If you're working with single clicks on a one by one basis, process each and listen back regularly. You can always undo any processes that don't work effectively.

Step 3:



After choosing an acceptable level of click reduction, listen carefully to ensure you aren't unintentionally harming any transients. Using a declicking tool on its highest settings can audibly soften transients. If you can hear that the transients are losing their edge, turn the strength of the declicker down a little.

RX TIP • Use the Clicks Only feature in RX 4 to listen out for the isolated clicks. If you hear desirable audio creeping in, your settings are likely too harsh.



DIGITAL CLICKS

Repeat the same steps used to treat the analog clicks, but instead use M-Band (periodic clicks) mode if the clicks come in fast periodic series. If the digital clicks are random, then Random mode should be used for them. It allows for better preservation of timbre of the useful signal.



RX TIP • Use Click Widening to expand the click size if your clicks are not being fully recognized and removed by the Declicker.

RX TIP • Using the frequency skew can achieve better results if a click is focused specifically towards the high or low end. Generally, however, this is best left in the middle.



GENERAL TIPS FOR REMOVING CLICKS AND POPS

1. Two is better than one. As with denoising, there are scenarios where two processes of any declicker are better than one, particularly if you're dealing with an old recording full of unwanted clicks. Performing one process of declicking will remove the most obvious clicks, allowing the second process of declicking to remove the quieter ones.
2. When is a click not a click? The simple answer is: when it's a transient. Overly harsh declick settings can harm the attack of transients within your audio, particularly instruments such as brass, acoustic guitar, and percussion. It's important to listen out carefully for this, and dial the declicker back if it's occurring.
3. Choose your battles. It's easy to process an entire file with only one problematic click. But there is no need to risk the fidelity of good audio if it only contains a small number of clicks. For infrequent click problems, treat them individually before moving on.

11: REMOVING CLIPPING

Live concerts and on-location interviews frequently become victims of signal overload or clipping. This can happen in both the analog and digital domain, as well as during the A/D process. This is often the result of time constraints in setting up and sound checking. In music recording, overly enthusiastic singers and drummers are frequently the worst offenders!

WHAT'S THE GOAL OF REMOVING CLIPPING?


The goal of removing clipping is most commonly to attempt to remove it entirely and allow the original audio to sound as natural as possible.

Although a certain level of residual noise is often deemed acceptable by the human ear, clipped audio causes actual destruction of the audio—something the human ear tends to be less forgiving with.

Some distortion cannot be fixed. For example, old records that have been overplayed may have groove wall distortion from record wear—something that is virtually impossible to fix.

PRINCIPLES OF REMOVING CLIPPING

Declicking tools can help treat both analog and digital clipping or overload distortion.

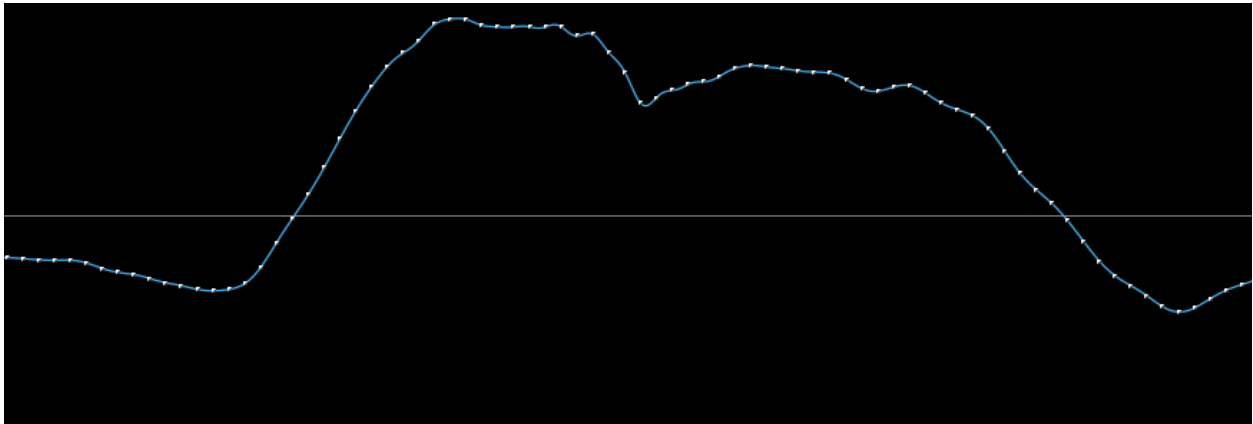


Zoom in on a clipped waveform to clearly see where the audio has been truncated. The squaring off of the waveform occurs when there isn't enough dynamic range available to express the amplitude of the audio signal.

It's technically possible to obtain moderately good results by using the mouse to slowly redraw each sample—restoring it to what it might have been prior to clipping. Declipping tools, however, use more advanced techniques to intelligently redraw the waveform. This saves the audio engineer lots of time, and removes manual work.

In RX 4, you can use the Declip module. It uses advanced interpolation techniques to intelligently rebuild the peaks of clipped audio.


USING DECLIP IN RX 4

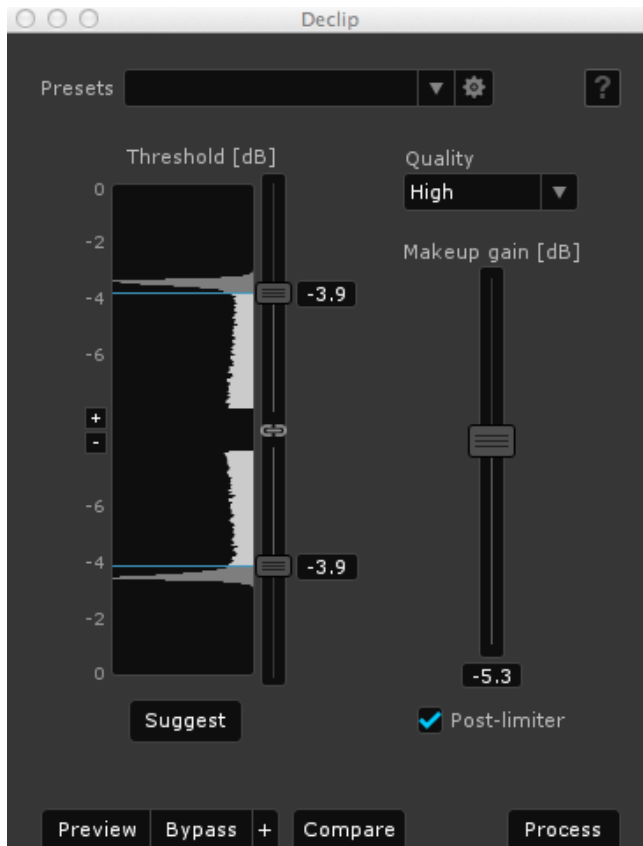

Step 1:

If you can actually see where the clipping occurs, Declip is both easier to use and more likely to succeed. Once you've identified exactly where the clipping occurs, you can open Declip in the RX 4 standalone application and set a suitable threshold. There are two ways you can do this:


1. Zoom in on the waveform and drag the threshold down until it sits just below the truncation.
2. Adjust the threshold so that it sits just below the clipping as displayed on the histogram display—this automatically computes for you, based on the selected audio.

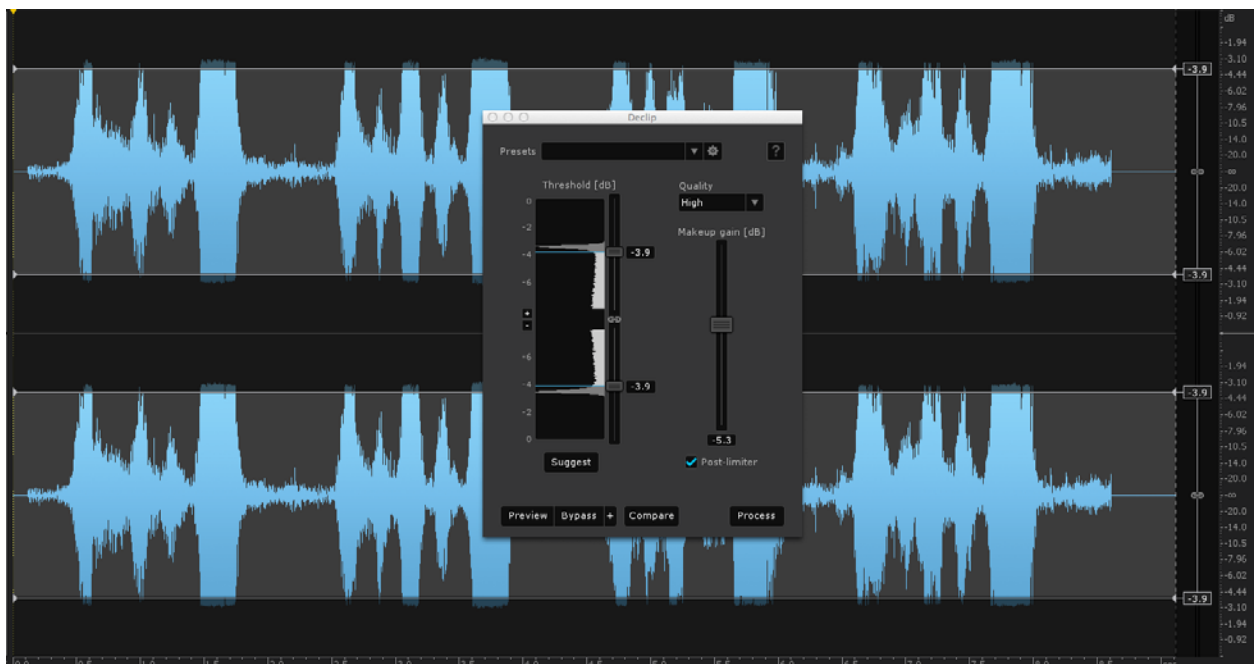

RX TIP • The height of the histogram represents the high and low levels of the audio, while the width of the bar indicates the most frequent levels. Here, a white line that covers the full width indicates that clipping is present.

RX TIP • Clicking on the Suggest button will cause Declip to automatically place the threshold. This may save you some time and manual work.


Step 2:

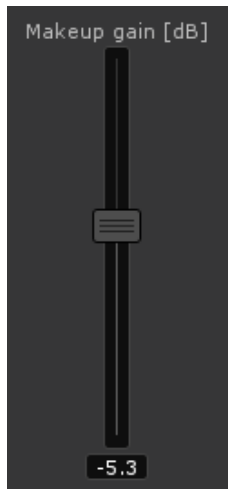


Declipping tools redraw a truncated waveform. Therefore, if the waveform is clipped at 0 dB, redrawing it will cause the waveform to go above 0 dB. Declipping tools utilize makeup gain to counteract this, which allows you to recover the natural sound without creating additional clipping. This facility accommodates the increased peak levels caused by the declipping process.

Generally, makeup gain of around -3 dB to -6 dB is a good amount to begin with. Try that, and click process.

RX TIP • Using the post-limiter in the Declip module will automatically limit the audio to avoid creating additional clipping. This may be necessary in some cases to avoid a drastic reduction in level, but you shouldn't solely rely on this. You can get a more natural sound with the right makeup gain settings applied.




Step 3:

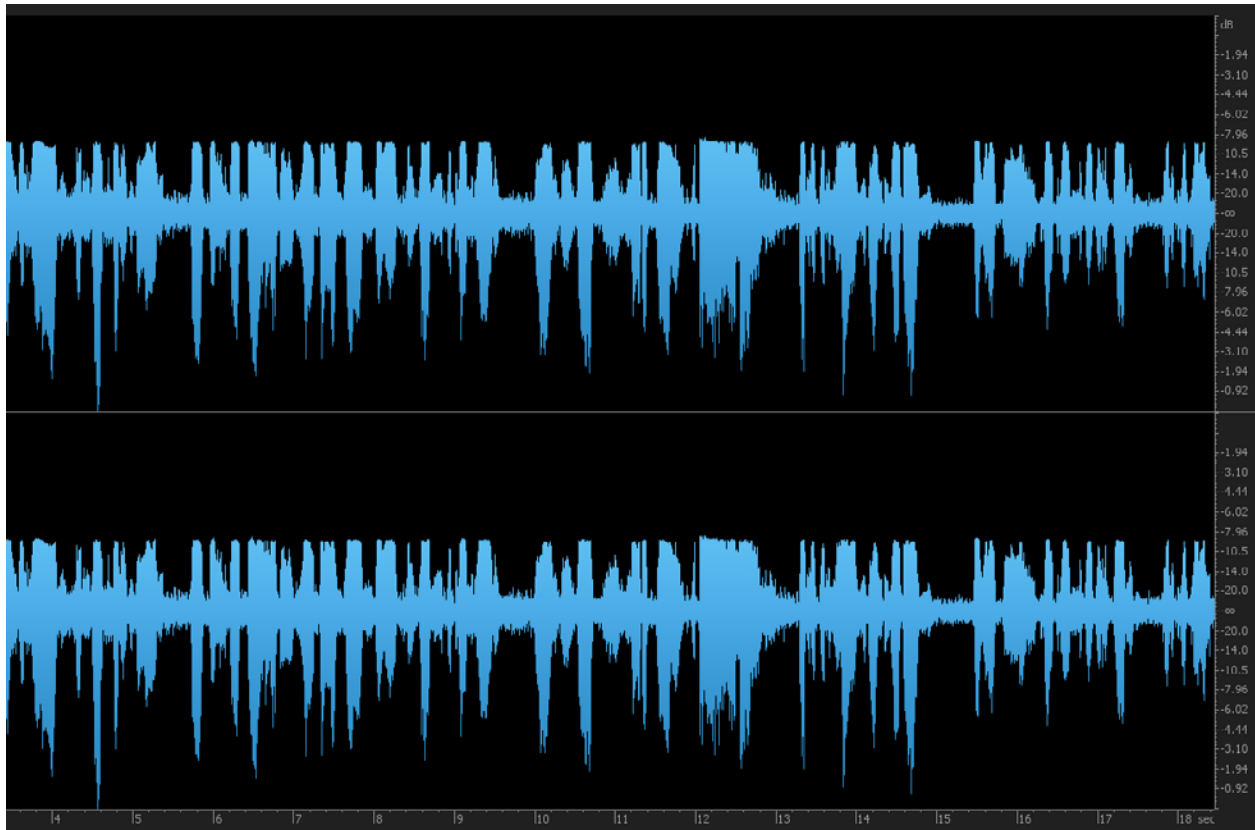

Occasionally the audio may have what's called asymmetric clipping—a scenario where clipping occurs at a different level on one side of the waveform.

When confronted with this scenario, click the linked icon to delink the two thresholds. This will allow you to set different threshold values for the positive and negative sides of the waveform, which offers the best sounding results when removing clipping. This feature is exclusive to RX 4 Advanced.

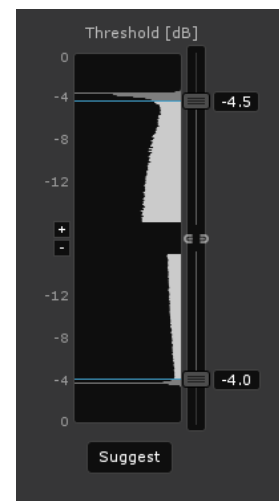

GENERAL TIPS FOR REMOVING CLIPPING

1. If your declipping tool does not work for you, you may be able to use RX 4's Spectral Repair tool to fix short corrupted segments. See the Spectral Repair chapter for more details.
2. To avoid volume fluctuations you may want to process the entire audio file rather than specific sections.

12: REMOVING REVERB

Reverb is used to add certain spatial characteristics to audio. It's often used on vocals and instrumentation, but can be used on sound design elements too.

It's a relevant topic to discuss, even for audio repair. Technologies that are able to attenuate reverberations in an audio signal are not very common, and there are only a few effective tools that do this job well.

RX TIP • RX 4 includes technology created by iZotope that reduces reverb. It's offered as part of the RX 4 Advanced Dereverb module.

WHAT'S THE GOAL OF REMOVING REVERB?

There are two main reasons why an audio engineer might seek to reduce reverb in an audio signal.

The presence of unwanted reverb is a common issue when editing automated dialogue replacement (ADR), matching location recorded dialogue with studio dialogue and mixing dialogue recorded in larger spaces.

Reverb can prevent an audio engineer from achieving a smooth, warm, and present dialogue mix. Particularly if recorded in a large studio or space, reverberations might be so overwhelming that they prevent the audio engineer from adding more reverb as an effect.


In this case, the goal is to remove as much unwanted reverb as possible, without impacting the original audio.

Reducing unwanted reverb before doing heavy denoising is a helpful process when repairing and restoring audio.

An overly enthusiastic denoising process may modulate reverb tails, which results in unwanted artifacts. If you're required to perform heavy denoising, reducing the reverb tails first may lead to a better result.

In this case, the goal is to reduce rather than remove entirely.

PRINCIPLES OF REMOVING REVERB

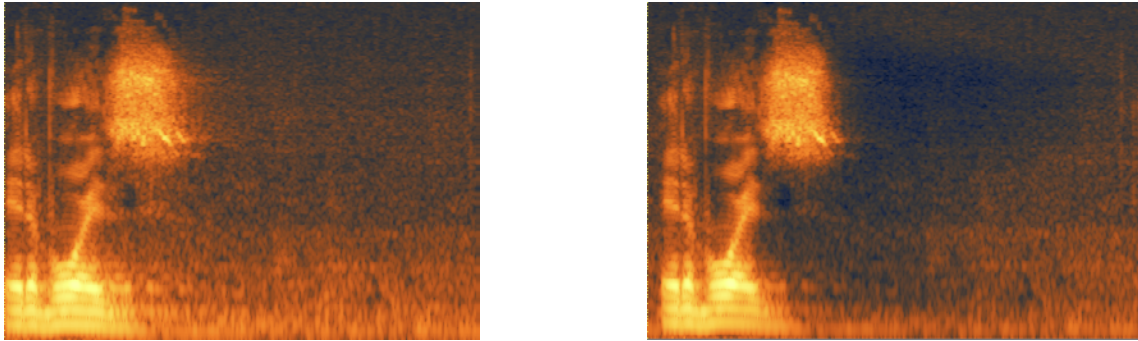

The above image shows a reverberant signal versus the same signal without reverb. The difference between the two is most obvious in the decay that follows the transient, known as the reverb tail.

Technologies that seek to attenuate reverb often look to these tails in order to identify and distinguish the reverb. This is so that attempts can be made at reducing its effect.

Reverbs with short tails or heavy early reflections can be very hard to reduce, as it makes identifying reverberation more difficult for algorithms.

It isn't always possible to remove early reflections, and you may have to settle for reverb reduction rather than total removal.

USING DEREVERB IN RX 4

Please note that reverb reduction tools are very few in number, and you may find that the controls mentioned here are specific to RX 4 Dereverb.


Step 1:

Listen to your audio. Try and discern how long the reverb tail is, and then set the tail length accordingly. Using an incorrect tail length setting can cause more harm than good.



RX TIP • The Learn feature may help here, as this will automatically set the band thresholds for you. For best results, learn from the entire audio file. Dereverb is not like Denoise, thus learning from a selection of “just reverb,” as you would “just noise,” will not help the computer distinguish the reverberant elements of the signal.

Step 2:

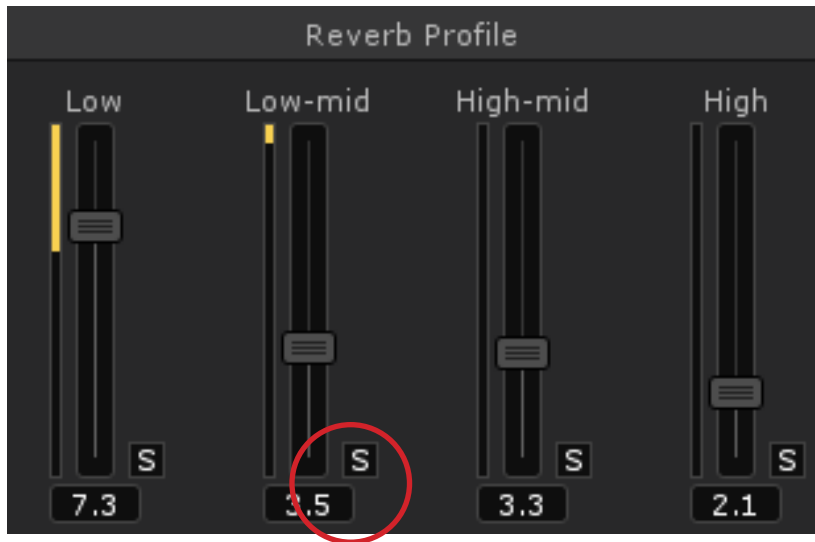

RX 4's Dereverb is multiband. There are four sliders allowing you to adjust the amount of reverb reduction in different areas of the frequency spectrum.

If you used the Learn feature in Step 1, these sliders may have been initially positioned for you. Step 2 is all about making sure.

Using the Solo function, listen to each band and adjust the slider until you're happy with the amount of reverb being reduced.

Step 3:

Now that you've set the frequency-specific processing details, you can adjust the master Reduction slider to control the overall amount of reverb reduction.

Now you should use the Output Reverb Only function to listen to the signal being removed. As with other repair and restoration tools, it's useful to check what you're actually removing, in case it contains any desirable audio. In this case, you should be hearing the reverb in isolation, and not the direct audio.

RX TIP • Enhance Dry Signal is a useful additional control, designed to boost the level of reverb-free parts of the signal, clarifying the audio left behind.

GENERAL TIPS FOR REMOVING REVERB

1. Reverb is often centered in the mid range, and focusing your attention on the low and hi-mid multiband sliders will help ensure a good result.
2. Use a gentle pass of 2-4 dB of denoising before removing reverb and then doing some heavier denoising. A slight, gentle pass can help remove the top “silky” layer of noise in the audio signal, allowing reverb removing algorithms a better peek at the reverb underneath. You might find this gets better results even if not explicitly recommended by the reverb tool’s manual.

13: EXPORTING AND DELIVERING AUDIO

Once you've completed the repair and restoration process, you'll want to take the necessary steps to export and deliver your work.

This might be as simple as rendering/bouncing your mix from a DAW, or saving an audio file that you can use elsewhere. But sometimes, particularly in the case of audio forensics or audio for TV and broadcast, delivery requirements might be somewhat demanding.

WHAT'S THE GOAL OF EXPORTING AND DELIVERING AUDIO?

Much like the mastering process, the goal is to deliver high-fidelity audio in the correct medium—with the right deliverables attached.

TIP • A deliverable could be something else that's required of the audio engineer, such as the documentation of steps taken (often required in audio forensics), or a proof of loudness compliance (often required for broadcast audio).

PRINCIPLES OF EXPORTING AND DELIVERING AUDIO

It may sound obvious, but knowing what the client requires is perhaps one of the most important principles of exporting and delivering audio.

Establishing the deliverables at the beginning of a project, whether for personal or commercial purposes, can save time and help avoid additional hours of prep work.

EXPORTING AND DELIVERING AUDIO IN RX 4


If you've been using the RX 4 plug-ins inside a DAW, you can simply render/bounce your mix session.

RX TIP • If any of the RX 4 plug-ins have been using a lesser quality setting for latency purposes (such as Low or Medium in Declip), change this to high before bouncing.



When using the standalone application, you have several options at your disposal. Although these options are described within the context of RX 4, the principles of maintaining session data and multiple copies of your work still apply across any form of audio repair and restoration work.

Step 1:

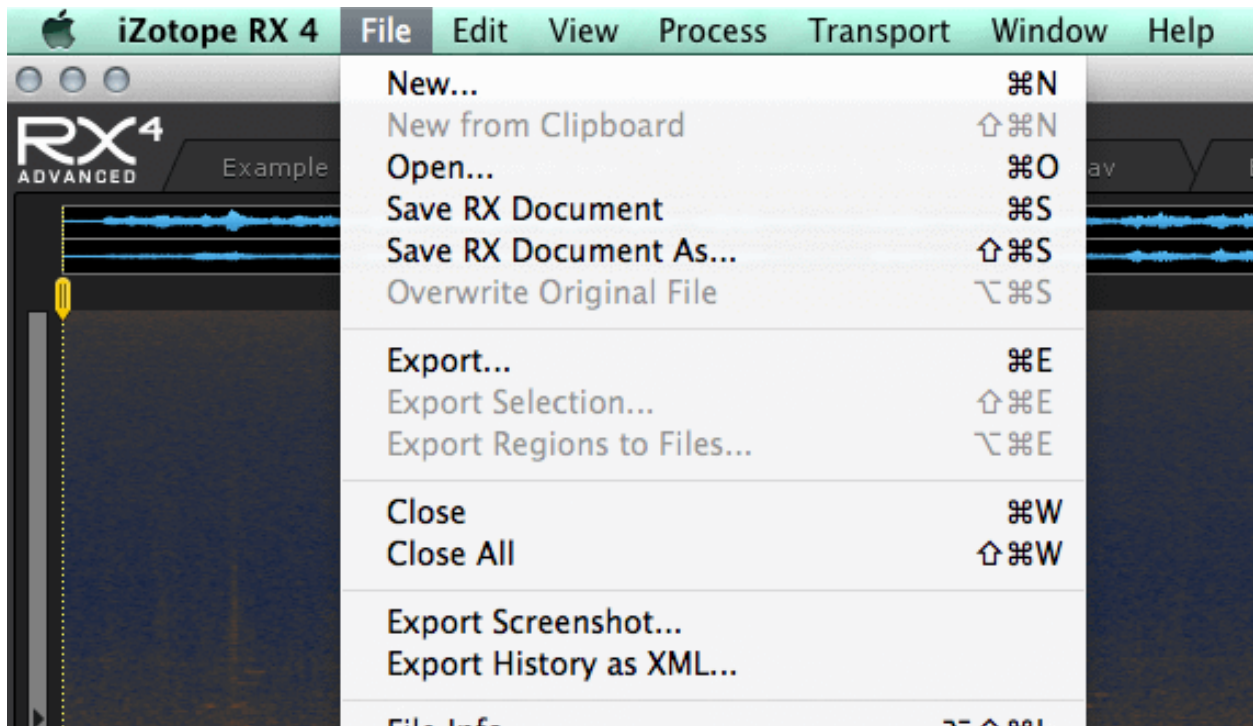


Click on File in the upper menu bar. This provides several options.

- Save RX Document
- Save RX Document As:
RX documents retain your edit history in a .rxdoc session file format, allowing you to save your audio in order to resume work later.
- Export allows you to save your work as a WAV, BWF, AIFF, FLAC, or OGG file.

- Export Selection allows you to export the audio you've highlighted, which is particularly useful if you tend to break apart larger projects.
- Export Regions to Files allows you to export individual regions from one audio file as separate, unique audio files.

Step 2:

Decide on your output format. The file format options available to you are WAV(including BWF), AIFF, FLAC, OGG, and RX 4 document.

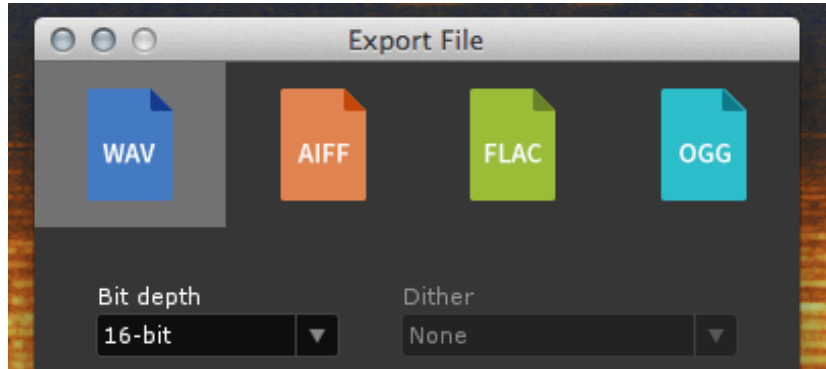

Should you choose WAV or AIFF, RX 4 allows you to save in 32-bit floating point. Many other audio editing and repair/restoration suites allow this too.


16-bit is preferred if you're delivering media for an audio CD, for example.

GENERAL TIPS FOR EXPORTING AND DELIVERING AUDIO

Prior to exporting audio as outlined above, ensure you've at least considered the tips below, as they may be relevant to a specific project or scenario:

1. When reducing bit depth, always dither. If the bit depth of the audio upon delivery is going to be lower (a 24-bit digital audio file being reduced to 16-bit for a CD master, for example), dither should always be applied as the final step before exporting.

RX TIP • RX 4 includes iZotope's award winning MBIT+ Dither (also available in Ozone 5 and Ozone 5 Advanced), which manages your dithering process automatically.

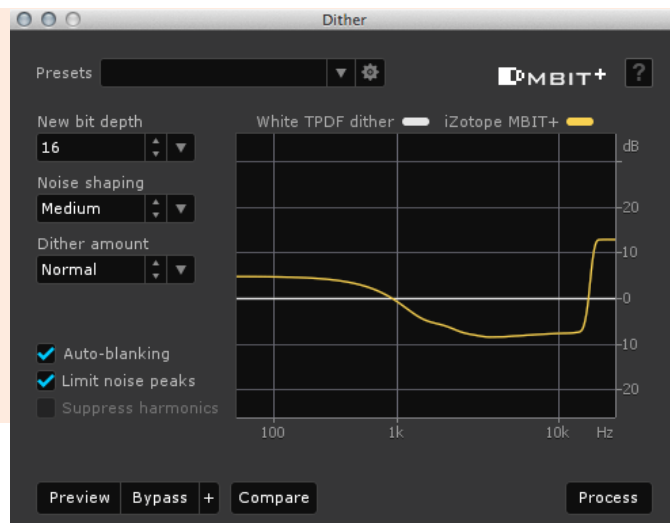

TIP • If you're interested in learning more about the concept of dithering, iZotope has produced this informational video: <http://youtu.be/vVNzylf9sGo>. If you prefer to read, you can download iZotope's free dithering guide at: <http://www.izotope.com/ozone/guides>.


2. Whatever your audio repair and restoration solution, make sure you document the steps you take. Keep copies of the original audio, save presets, and note as much information as possible about the process. This is most useful for people working in audio forensics who might be required to verify and authenticate work. It also applies to freelance engineers who might need to clarify their time commitments.

RX TIP • RX 4 saves your work as an RX 4 document, in addition to allowing you to export your edit history via XML. The inclusion of iZotope Insight (mentioned below) also allows you to measure and export graphs and spreadsheets of your audio loudness data—required by many large clients.


3. Ensure loudness compliance. If your audio repair and restoration work is part of a larger mix that's likely to be broadcast, you should ensure it complies with the latest loudness regulations in your territory. This avoids costly remixes and adjustments once you've delivered your audio.

RX TIP • RX 4 Advanced includes iZotope Insight, a comprehensive metering suite that monitors and ensures loudness compliance. For more information, watch this useful video:

<http://youtu.be/XpmOLjDS00c>. And for more information on Insight, visit www.izotope.com/insight.

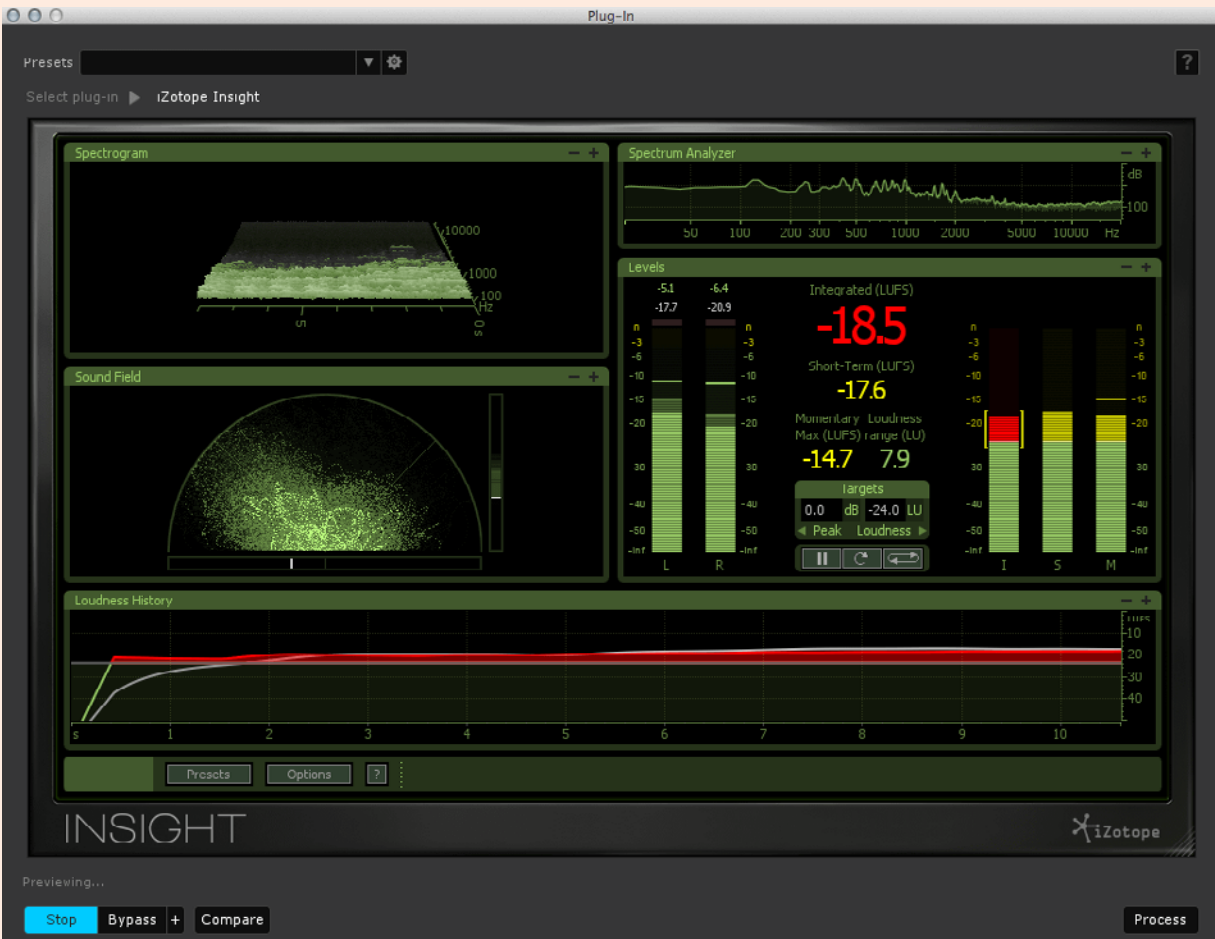

4. Ensure everything is the correct sample rate, as required for delivery. A project destined for CD would require a sample rate of 44.1 kHz, whereas the audio for a video project would typically require 48 kHz. This may involve either downsampling or upsampling your audio. Please note: upsampling audio does not enhance sonic quality.

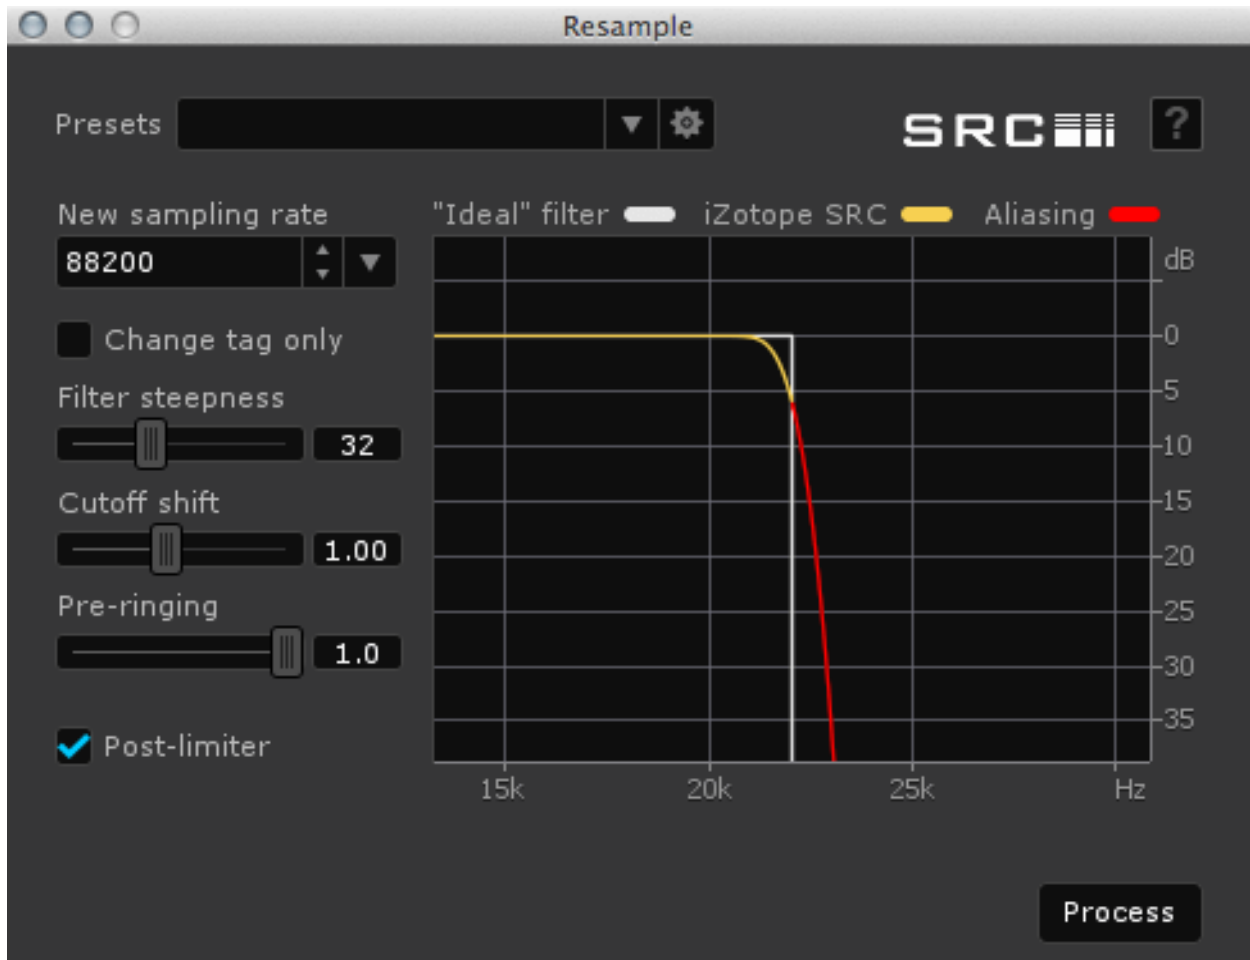

RX TIP • RX 4 includes iZotope's Sample Rate Conversion (SRC) technology as part of the Resample module. It supports sample rates between 11.025 kHz and 192 kHz and beyond that, by manual typing of the rate.

5. Always retain a copy of your work that is of the highest quality. If your audio is going to be delivered across multiple formats (such as MP3, AAC, WAV, or FLAC) it's a good idea to handle these conversions yourself. This will allow you to maintain quality control, and avoid a client taking your high fidelity work and using a bad encoder that will convert to these formats. Encoding to formats like MP3 or AAC does increase peak levels of the signal and may cause clipping if the signal was already normalized to 0 dB.

14: SUMMARY

We hope this guide has increased your knowledge of audio repair and restoration and, as a bonus, given you some ideas of how to use RX 4 effectively. When conducting audio repair and restoration, it's important to understand that each noise problem is different. Learning the fundamentals, such as those outlined in this guide, will allow you to quickly and effectively hone in on which tool you need for the job, and how best to use it.

Ultimately, there are no right answers, no wrong answers, and no rules—audio repair and restoration is about experimenting and having fun. To test what you've learned from this guide, be sure to download our audio examples and move on to Appendix C, where you'll find descriptions of how to repair real world audio problems. Enjoy!

Thanks,

iZotope, Inc.

P.S. Aside from RX 4, we also invite you to try out our other products. Each one is available for download as a free 10-day trial at www.izotope.com/trials.

Here's a quick overview of several of our other products:



iZotope Ozone 5 Complete Mastering System

Ozone is a single, integrated plug-in that includes eight essential mastering tools: Maximizer, Equalizer, multiband Dynamics, multiband Stereo Imaging, Post Equalizer, multiband Harmonic Exciter, Reverb, and Dithering. Become the master of your audio!



iZotope Insight Essential Metering Suite (Included with RX 4 Advanced)

iZotope Insight is an extensive set of audio analysis and metering tools. It's perfect for visualizing changes made during mixing and mastering, troubleshooting problematic mixes, and ensuring compliance with broadcast loudness standards. Learn more at www.izotope.com/insight.



iZotope Nectar Complete Vocal Suite

Make your vocals and dialogue sound professional in a broad range of genres with Nectar's complete set of vocal production effects. Learn more at www.izotope.com/nectar.



iZotope Alloy 2 Essential Mixing Tools

Alloy gives you futuristic tools, fast results and—most importantly—fantastic sound. Bring character and life to every element of your mix with Alloy. Learn more at www.izotope.com/alloy.

15: ABOUT THE AUTHORS

In addition to the hard work of iZotope's development, QA, and content development teams, we also wish to extend our thanks to Nat Johnson whose writing, restoration expertise, and audio examples contributed greatly to the original version of this guide published in 2008.

Nat Johnson

Nat Johnson started a career in radio broadcasting and sound recording after joining the Concert Network as an announcer and music programmer. During this period, he was offered the opportunity to record a season of live performances for Sarah Caldwell's Opera Company of Boston. Soon after, Nat joined the staff at WGBH-TV and radio and was assigned the unique triple-role of announcer, producer, and audio engineer. He became involved with the recording and mixing of multi-track recordings, including broadcasts by the Boston Symphony and Pops Orchestras.

While in England, producing an album for WGBH at the BBC Studios in London, Nat received an invitation from Ray Dolby to tour Dolby Laboratories in Clapham. Later, as a producer for RCA Records, he continued his associations with Dolby in New York, developing Pro Logic surround remastering projects for CD. In 1999, while supervising classical and film music reissues at BMG/RCA, Johnson initiated a unique audiophile series of high-end CD's employing Weiss 24/96 A/D converters and Sonic Solutions' High Density editing system. In 2000, Nat was nominated for a Grammy as the producer of the 94-CD Rubinstein Collection for BMG/RCA.

APPENDIX A: GETTING SET UP TO REPAIR AND RESTORE AUDIO

EQUIPMENT

Software

iZotope RX 4 installs both the standalone audio editing application, and the separate plug-ins for use with a DAW.

If you prefer working inside a DAW, you can load many of the RX 4 modules as plug-ins, provided it supports one or more of the following formats in 32- or 64-bit: VST, VST3, AU, and AAX.

Spectral Repair only functions in DAWs that support offline processing, such as Avid's Pro Tools 11. Here you can open a spectrogram and use Spectral Repair as an Audiosuite process.

iZotope's audio repair and restoration technology is also licensed to a number of third-party manufacturers. Certain algorithms and parameters are accessible within software such as Sony's Sound Forge—a good way to get started with the basics, if you don't yet own RX 4.

Many software solutions for audio repair and restoration, such as iZotope's RX 4, have free trials. Taking advantage of these trials is an effective way of establishing your preferred solution.

Computer Requirements

Audio repair and restoration tools can be some of the most CPU-intensive audio processes to perform. Therefore, powerful machines are preferred, as they will be faster at processing edits. Here are some requirements to keep in mind:

- A fast, multi-core processor. You'll need this kind of processor if you want to take advantage of RX 4's optimized speeds.

RX TIP • RX 4 is already fast, but is additionally optimized to take advantage of multi-core processors. Thus the faster your processor, the faster your performance will be when crunching advanced audio algorithms.

- A large, high-resolution monitor. Spectrograms are incredibly visual by nature, so the more screen real estate you can dedicate to this way of visualizing audio, the better.

TIP • Dual monitor setups allow you to place a spectrogram on one screen, and your audio processing modules on another.

- **RAM.** If you work on large files, and have several audio or video editing programs running at once, a large amount of RAM is needed to cope with the load.
- **A backup hard drive.** With hard drive technology so affordable these days, the initial cost of a backup hard drive is far outweighed by the benefits of having everything backed up and retrievable—particularly useful if your audio repair or restoration project is for a big client!

Sound Card/Audio Interface

You can use the sound card that came with your computer to monitor audio when doing restoration work, but we recommend investing in a high-quality sound card or audio interface designed for professional-level audio recording and playback.

In most cases, this will let you monitor audio with less noise, and will give you higher quality A/D inputs for transferring analog media to your computer. It will also include professional standard outputs such as XLR or balanced quarter-inch phone jacks, which will let you connect to audio reference monitors with well-shielded cables.

Visit your favorite audio retailer to check out a wide range of interfaces at a wide range of prices. Pick one that suits your needs. If, for example, you'll be transferring a lot of recordings from vinyl 33 rpm or 45 rpm records, choose an interface that includes a ground screw and built in phono preamp.

MONITORING AUDIO

Reliable audio monitoring, as you might imagine, is essential to successful restoration. We suggest a full-range speaker system that suits your needs, as well as your working space. It's a good idea to frequently check your work on other systems as well. As with mastering, the most important advice we can give you when it comes to monitors is to learn the unique characteristics of your pair and how they sound in your room. The best way to "learn" your monitors is to listen to lots of recordings that you know well. A good pair of headphones can sometimes help, as you may want to listen to low-level details that may not be obvious on loudspeakers.

Room Acoustics

You can have the best reference monitors money can buy, but if you're working in a tiny square room without acoustic treatment, you won't accurately hear the flat representation of frequencies. Even small details, such as where you place the speakers, will change their frequency response drastically. We recommend researching room acoustics online. Even if you're on a budget, there will always be a solution

that will help improve the sound of your room.

Companies that make acoustic treatment typically have a large number of resources available, and these resources are designed to help you determine what your space requires.

TRANSFERRING MEDIA TO THE COMPUTER

When you sit down and start restoring an audio project, you might be lucky enough to have a digital audio file that has either already been digitized, or that began life as a digital format. However, many audio restoration tasks require you to get an old recording from tape, vinyl, or other source onto your computer. Here are some tips for getting the most usable digital transfers of your audio:

Start with the Master Copy

This can't be stressed enough: always utilize original, unprocessed source where possible. Files that have already been copied from record to tape, or digital files that have been converted to MP3 or another compressed format like lossy ATRAC, will be more difficult to repair. You'll face more audible artifacts that are introduced during the copying and compression process. Similarly, it may be much harder to get good results from audio that has already had audio repair work done to it.

Input Levels

Whatever your source—tape, disc, analog, or digital—it's important to keep input signals at a moderate level if you're recording audio into a computer. A high level may result in inadvertent clipping at the soundcard or audio interface level. Too low a level and you may not have adequate headroom to accommodate changes in level as you apply certain processing functions during restoration. Since the noise floor of an analog to digital converter is fixed, you'll have a lower signal to noise ratio if you record at an unnecessarily low level.

TIP • Some CD and DAT players feature digital outputs, and many sound cards/audio interfaces have their own digital inputs. Taking advantage of this can be the perfect way to get digital audio directly into your computer without having to go through conversion to analog and back to digital.

RECORDING FROM ANALOG FORMATS

Vinyl LPs and 45s

After transferring a record to a computer, you can do a lot to remove noise and improve the quality of the recording. However, getting a good transfer from a vinyl record can be tricky. Keep these things in mind:

- The vast majority of turntables don't output a line level signal. They usually require a phono preamp. Phono preamps not only boost the level of audio coming in from the turntable, but they also apply special equalization—a part of the RIAA standard for creating vinyl records. Without this gain and EQ stage, your transferred vinyl will likely sound bad.
- Most audio amplifiers designed to work with turntables have phono preamps built in. So, too, do professional DJ mixers (many of these also provide excellent balanced outputs suitable for connecting to your audio interface). As mentioned earlier, some audio interfaces even have built in phono preamps.
- Some turntables now include direct USB outputs, getting around the preamp problem. However, keep in mind that many of these are very inexpensively made, and that the audio quality usually suffers during the A/D conversion process. Make sure you check the specs before you buy. A good turntable/audio interface combination may give you better quality and value for money.
- Make sure your turntable is grounded! Mixers and amplifiers with phono inputs will usually have a thumbscrew, which allows you to connect the ground wire from your turntable. Use it! If you don't, you'll probably be adding electrical hum to your transferred file.
- Clean your records! Removing dust with a vinyl brush and/or using a vinyl-cleaning product will make a huge difference in the quality of your vinyl transfer. Why spend hours removing dust pops on the computer? You can get rid of most of them beforehand by simply cleaning your record.
- Use a good stylus. If your record player has had the same needle for 30 years, chances are it's time for a replacement. Using worn out needles can affect the audio quality and cause damage to your records. Some turntables are now hard to find replacement needles for. Nevertheless, there are plenty of companies from whom you can purchase a replacement stylus.
- When you have a choice, choose a stylus that is made for archiving. Many available solutions are tailored to scratch DJs and sacrifice sound quality for tracking and other characteristics.

Shellacs, Cylinders and Older Phonograph Formats

There are a wide range of formats out there that preceded the modern vinyl LPs and 45 singles that are so commonplace today. In general, use caution when trying to transfer these types of recordings yourself, without the proper equipment. Many shellacs, for example, require different, non-standard stylus tips due to the varying widths of their groove wall. Some formats, like the Edison Diamond discs, have grooves that capture audio through vertical motion (called the hill and dale method) rather than lateral movement used by modern vinyl records. If you don't have the right equipment, consider finding someone that specializes in formats like this to do the digital transfer for you.

While we could write an entire book on these formats, it's simply out of the scope of this guide. If this is an area you're interested in, you'll find numerous websites offering useful information and good tips on 78 RPM history, availability and playback equipment, as well as storage and general care advice.

Magnetic Tape

There are endless recordings out there made on cassette recorders and reel-to-reel machines. Whether you're trying to restore old recordings, working on reel-to-reel masters, or simply cleaning up old four track cassette recordings of your high school garage band, there are a few things to keep in mind when transferring:

- The quality of your playback equipment will make a difference. If you connect your old stereo's RCA outputs to your computer, you'll not only introduce more noise into the transfer, you might have other unwanted problems like speed fluctuations.
- Slight changes in a tape's speed (called wow and flutter) can cause problems when you're trying to remove noise. This is because the noise can modulate along with the tape playback speed. It can make tonal and broadband noise difficult to remove as it changes over time. Work with a well built and well calibrated tape machine if possible


RX TIP • RX 4 Advanced has a Deconstruct module. You can use this to reduce noise that changes sound as a result of wow and flutter, and also the time-variable wear found on older 33s, 45s, and 78s.

- Tape heads can pick up debris and become magnetized over time, leading to poor playback quality. Cleaning your deck's tape head, capstan, and rollers can help ensure the utmost quality for your recordings. You can find deck cleaning and demagnetizing kits online and in specialty stores.
- Old mylar/polyester tape can stick to itself over time, which causes tapes to self-destruct upon playback. If you're pulling an old reel-to-reel tape out of a dusty archive, you may want to consult with an expert before trying to play it. Some tapes can be baked in an electric oven to remove moisture and revitalize the tape's adhesive, but we don't recommend you try this at home.

APPENDIX B: GENERAL RX 4 TOOLS

The following is a list of general RX 4 tools that are extremely useful for the workflow of the audio repair and restoration engineer.

COMPARING SETTINGS

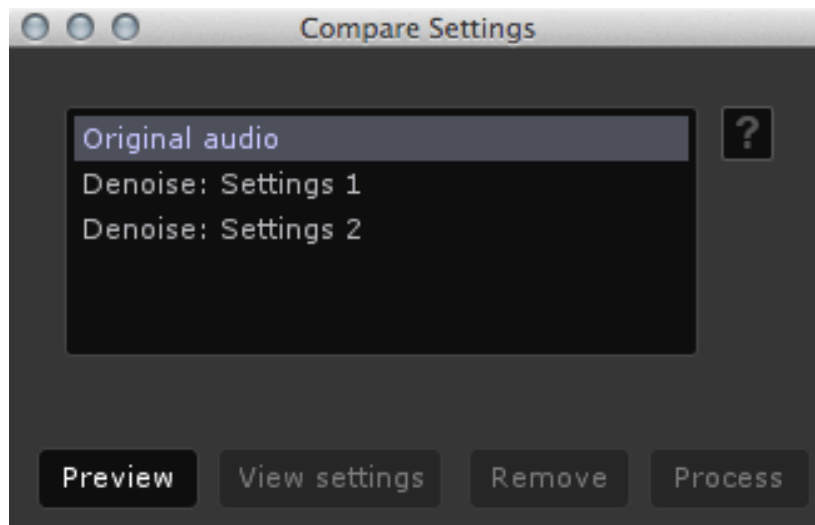

The ability to easily, repeatedly and accurately compare settings—visually and aurally—with the RX 4 modules is a valuable tool and timesaver for every project you undertake. You'll find the Compare Settings feature to be an extremely useful reference when contrasting a wide range of choices with the original.


Using the Compare Settings Window

Find a setting in the module you feel works for a specific situation and then click on the Compare button. RX 4 will automatically open the Compare Settings window while processing the result of your settings in the background.

View and change your settings and click again on Compare. RX 4 will add a new item to the list for each time you click on it. You'll have an instant comparison with every setting listed in the window.

Notice that the spectrogram display, as well as the sound, changes each time you select a setting in the Compare Settings window.

BATCH PROCESSING

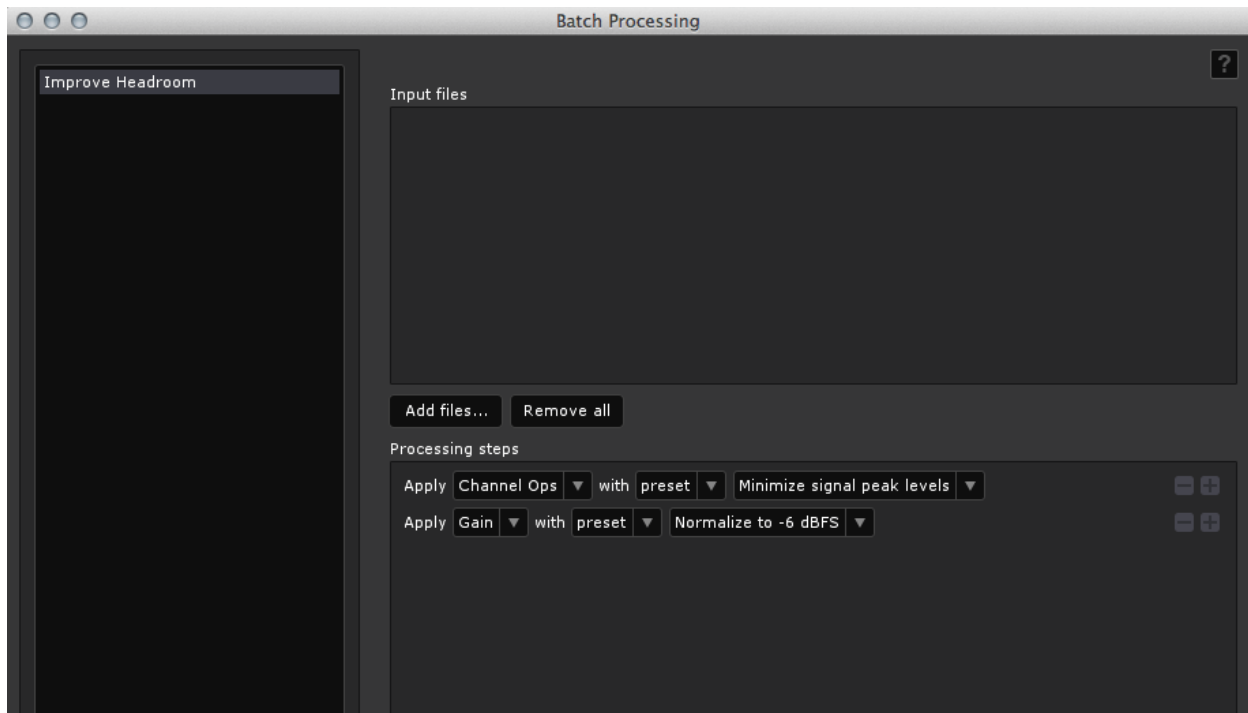

RX 4 offers numerous time savers, and Batch Processing is one of its best. Simply defined, Batch Processing enables the automation of processing on file groups.

If you have several files that need to be processed in the same way, you can use Batch Processing to define the set of steps (e.g. denoise, then declick, then normalize), as well as the output format and naming convention for each. RX 4 will then automatically process all of the files in the background.

Apply Batch Processing to Files


Click File from the upper menu bar, and then click Batch Processing. Click the Add Files button to add one or more files for batch processing, then choose the processing module(s) you wish to use.

Select a preset for the module, or define your own settings. To view the settings for a particular batch-processing job, click the View Settings button.

RX TIP • It's a good idea to use one file to manually establish the settings which can be applied to the other files that share the same problem.

Running a Batch Process


Once you're satisfied with the batch processing jobs, click Process to run them all. You'll see a progress dialogue box while RX 4 runs each job. To cancel the current job and all subsequent jobs, click Cancel.

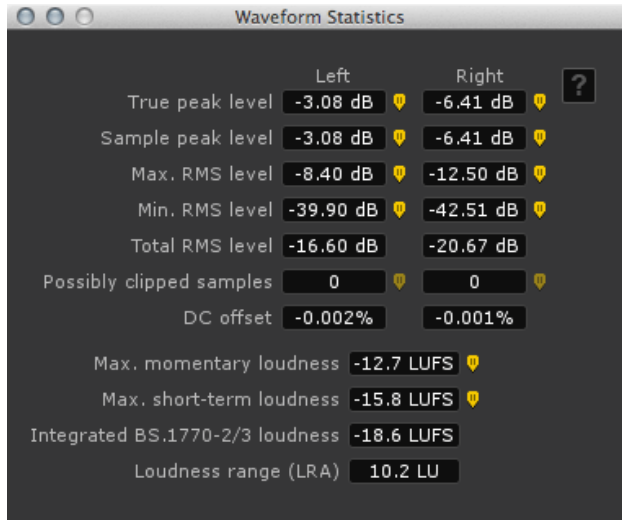

WAVEFORM STATISTICS

Waveform Statistics supplies the audio engineer with useful information about the peak, RMS, and loudness levels of the audio, as well as potential warnings about DC offsets and clipping.

It's accessible via View in the upper menu bar.

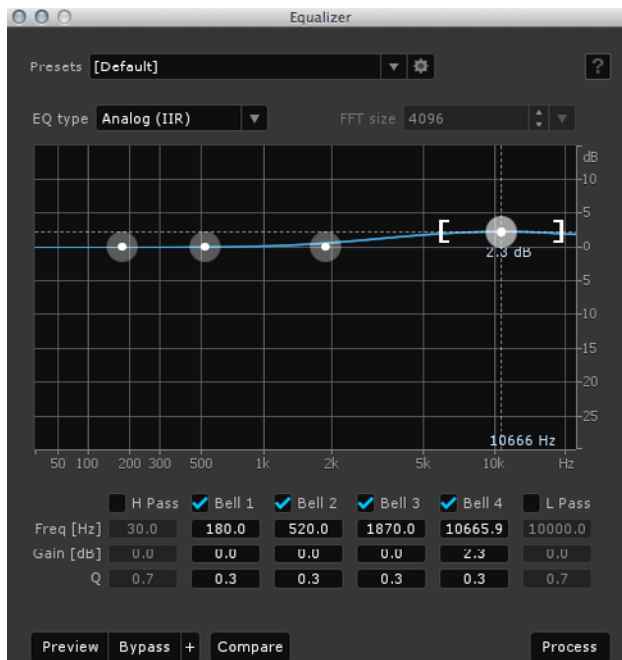


EQ

RX 4 includes a four-band parametric equalizer module with adjustable notch filters and low-pass/high-pass filters. This is a handy tool for cutting or boosting certain frequencies, or for quickly removing unwanted low or high frequency sounds like rumble and hiss.

The EQ module comes in two EQ Types: Analog EQ is a non-linear phase filter. The Linear-phase EQ uses a FIR (finite response) filter. The analog filter applies a very different (some say warmer) character compared to the linear phase filter, which is very precise and designed to minimize phase shifts in audio. You can easily switch between the two filters to hear which best suits your project.

PRESETS

Groups of settings in each of RX 4's modules and plug-ins can be saved and recalled as presets. Once you've made modifications to the settings in a module, you can name the preset and save it with a custom filename. Moreover, you can easily export your presets as .XMLs and store them on your computer—perfect for backup, or to share with other RX 4 users.

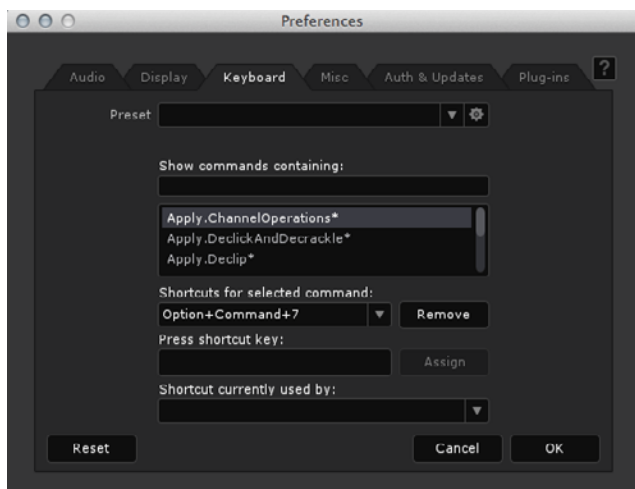

KEYBOARD SHORTCUTS

Similar to presets, RX 4 includes default keyboard shortcuts. For greater flexibility, you can customize these to better suit your personal preferences. The keyboard shortcuts menu is simple, and it will save you time and increase your efficiency.



APPENDIX C: REPAIRING THE INCLUDED AUDIO FILES

Let's take a look at some real world examples of audio problems and some tips and tricks to help go about fixing these common problems. To try out these fixes for yourself, [download the example files](#).

EXAMPLE 1: REMOVING BROADBAND NOISE FROM A CONCERT RECORDING

Details:

Player-organ recording in Boston: Vierne Organ Symphony No. 1- Allegro (STEREO). Originally recorded on Ampex 440-B, 1/4" analog tape, zero noise reduction used during session.

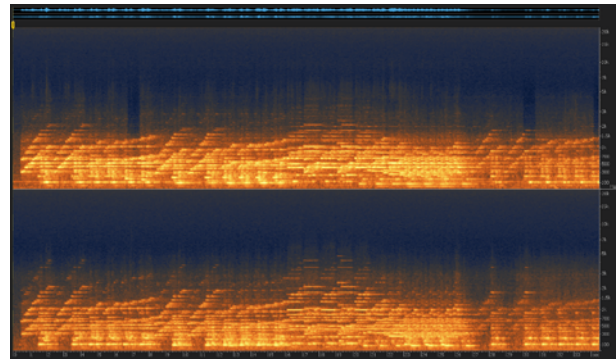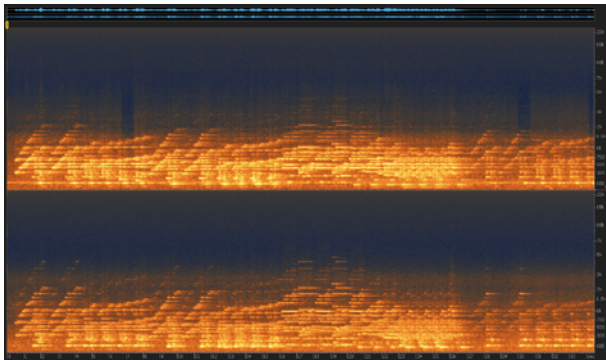

Comments:

The principal problem was a steady, low-level background noise resembling tape hiss. The challenge was to reduce the noise without sacrificing upper register harmonics that appear during quieter passages. The settings used in Denoiser, particularly threshold, were conservative.

The Spectral Denoiser has some tools that may help:

- The Broadband and Tonal reduction sliders can be delinked. There are not really any tonal elements in the noisy signal,



and reducing them would perhaps affect the low-level organ harmonics as they fall into the noise floor.

- The Reduction Curve has been enabled, and it reducing the high and low ends more harshly, since this is where the tape hiss is occurring. The curve is also being used to back off the mid range, where the organ is centered.
- In RX 4 Advanced, you can see the Enhancement slider. Enhancement is being used to enhance signal harmonics that fall below the noise floor.

TIP • Examining the waveform of a quiet passage, and checking your program aurally against the original, helps verify that your material is not being compromised during processing.



Goals:

- Train RX 4's Spectral Denoiser using a sample of pure noise. Use Denoiser to reduce background hiss and low-level hum.
- Try not to damage the musical quality of the performance—sometimes leaving a little noise behind is better than taking the life out of the recording! You may want to be conservative with the noise reduction controls, and use the smoothing options to prevent artifacts.

EXAMPLE 2: RESTORING AN HISTORICAL SPEECH: MAKING VOICE MORE INTELLIGIBLE

Details:

This file contains the voice of famed philanthropist Andrew Carnegie, recorded in 1914 (Internet source) (MONO).

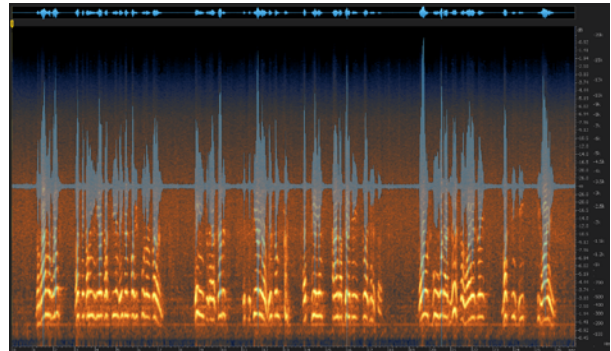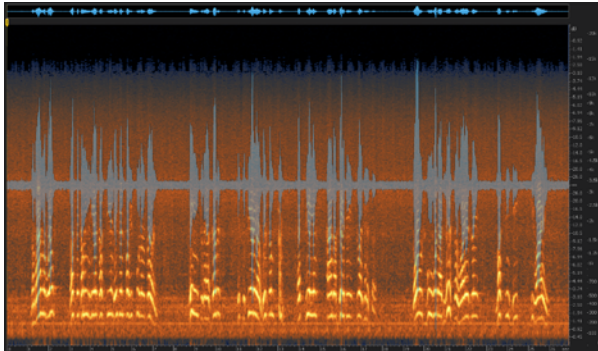


Comments:


Some of the words in this speech, recorded by Carnegie in 1914, are somewhat difficult to decipher—owing to a pronounced Scottish accent, made even more muffled by someone’s rudimentary attempt at noise reduction. In addition, there’s a steady background noise present. I began with RX 4 EQ to raise the voice out of the mud using a slight boost—roughly between 1 K and 9 K—and then ran Denoiser. I left the EQ compensation intact following the use of Denoiser, as this left the speech a bit clearer.

Goals:

- Use gentle linear-phase equalization to lift the voice out of the background noise.

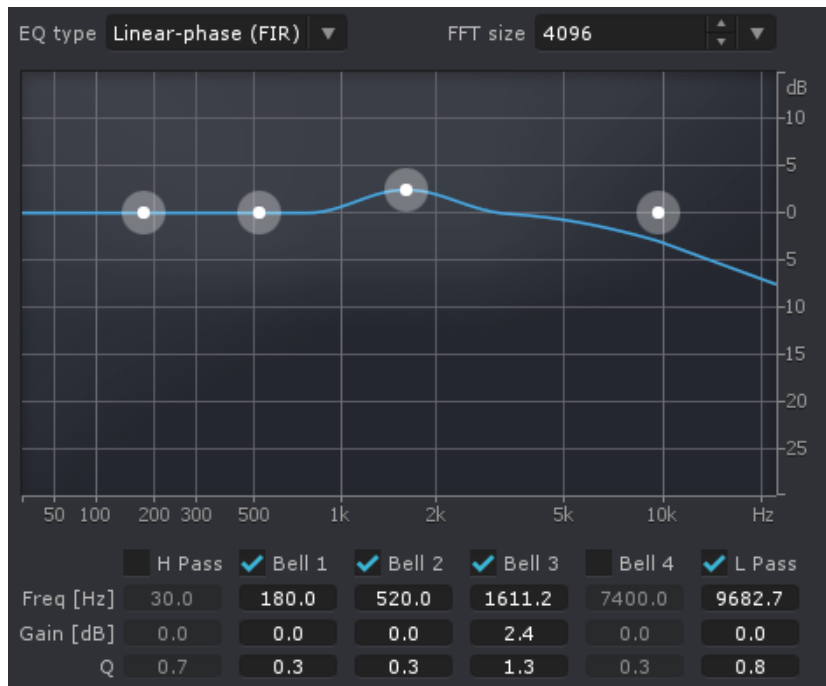

- Use Deconstruct to boost the tonal elements of the signal (voice) and reduce the variable noise/crackle.

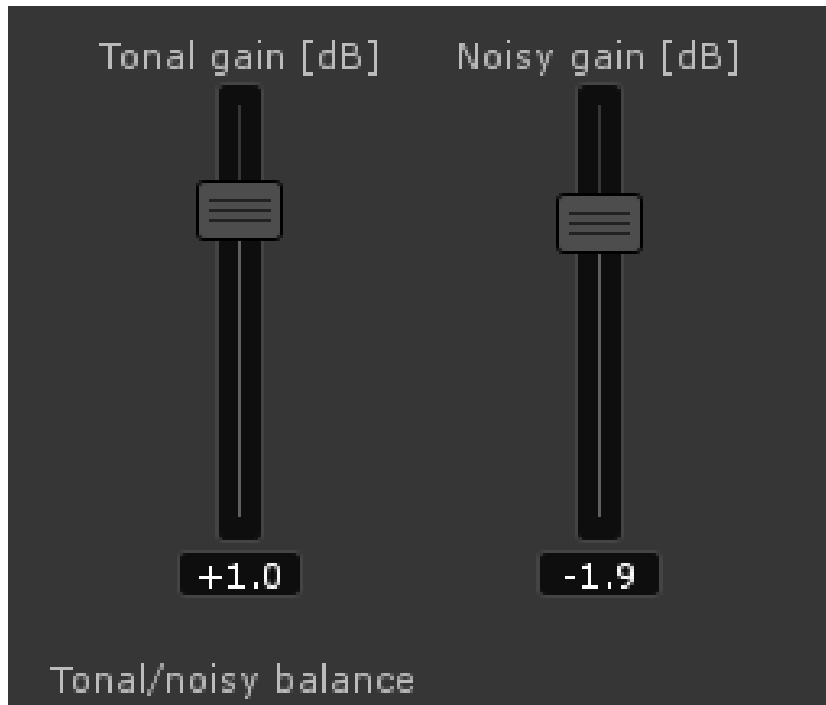

- Use the Spectral Denoiser to reduce steady-state background noise.




TIP • Using an approach that incorporates both EQ and Denoiser can make buried dialogue much more intelligible.

EXAMPLE 3: CLEANING UP A PHONE INTERVIEW WITH DECLICK AND SPECTRAL REPAIR

Details:

Interview with Francis Ford Coppola, recorded directly to DAT from phone patch (MONO).

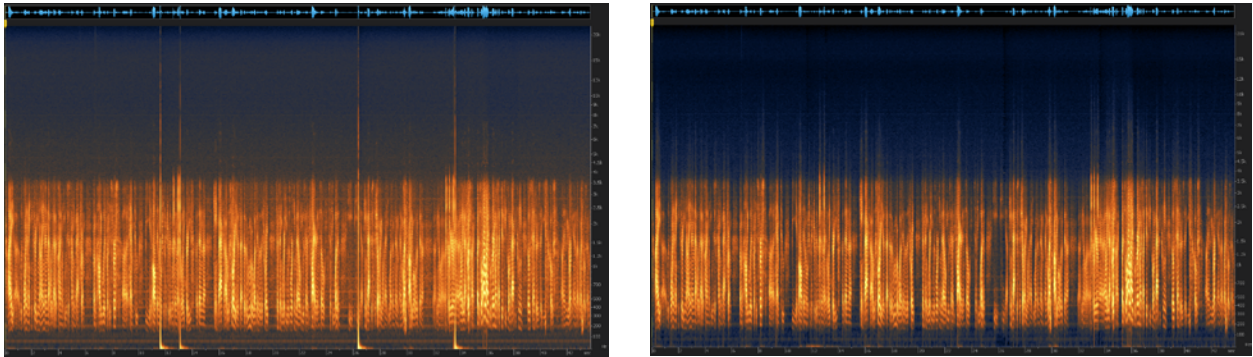


Comments:


The problems were caused mainly by mechanical contact with the telephone handset. For instance, at 11.62 seconds, where Coppola says the words “motion picture business,” a loud click is audible.

Goals:


- Use Declick’s Interpolate mode to remove the full bandwidth handset noises.

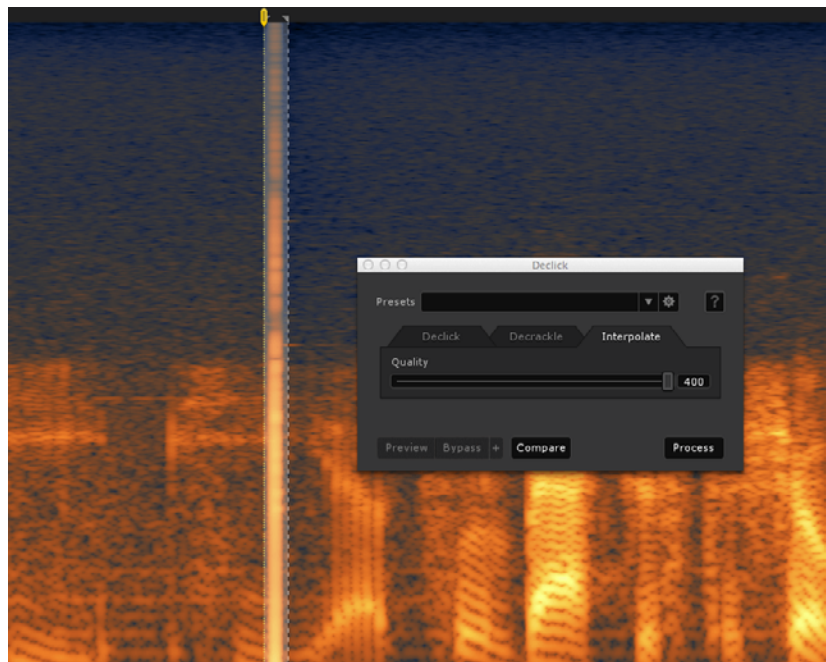


- Use Spectral Repair's Replace mode to remove the limited bandwidth handset noises.

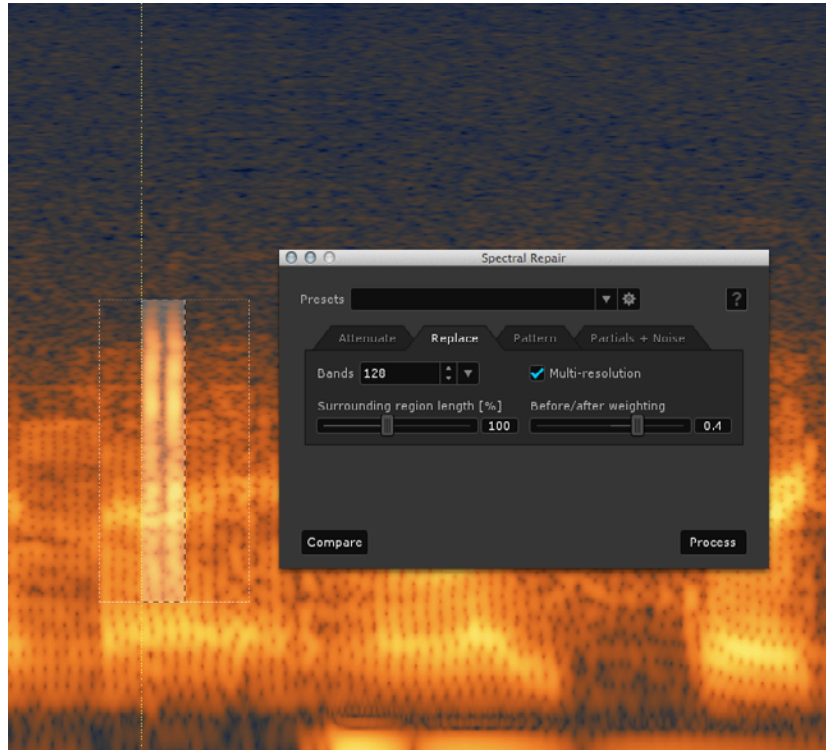

- Use Spectral Repair's Attenuate to remove the low frequency thumps.

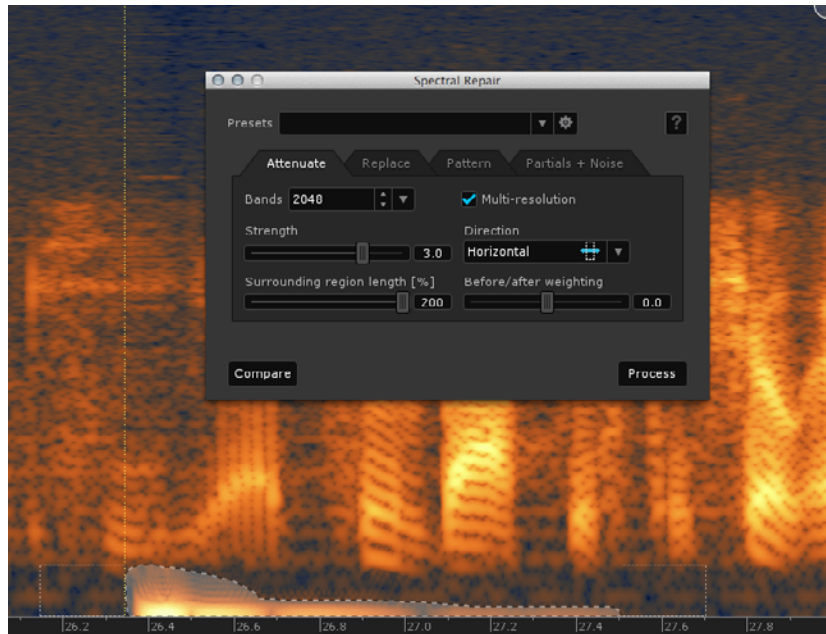

- Use the Dialogue Denoiser to reduce the level of background

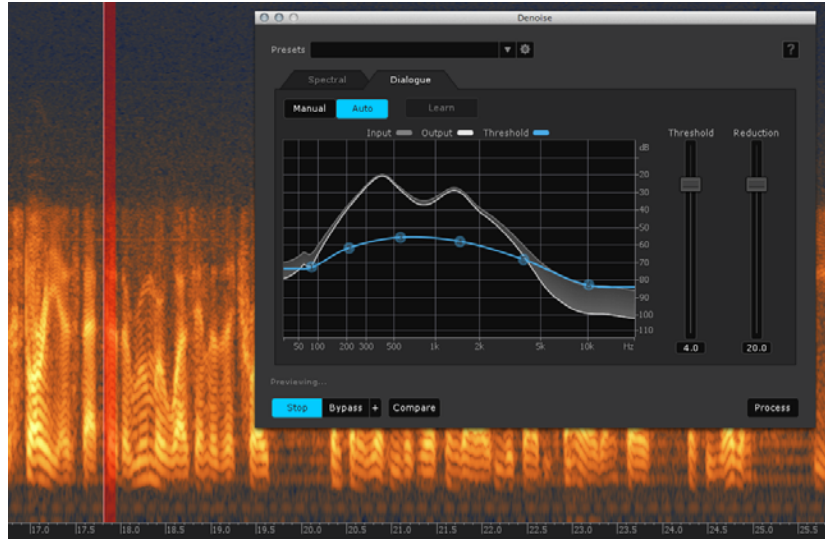


RX TIP • Each of the phone handset noises is comprised of a vertical spike and a horizontal thump. Removing the vertical spikes with Declick's Interpolate mode still results in an audible thump. A quick pass with Attenuate mode will remove the low frequency sound.

EXAMPLE 4: REMOVING CLICKS AND POPS FROM A CONCERT ON RECORD

Details:

Kings College Choir, Cambridge, England. Source: 33 1/3 RPM LP (1965, STEREO).

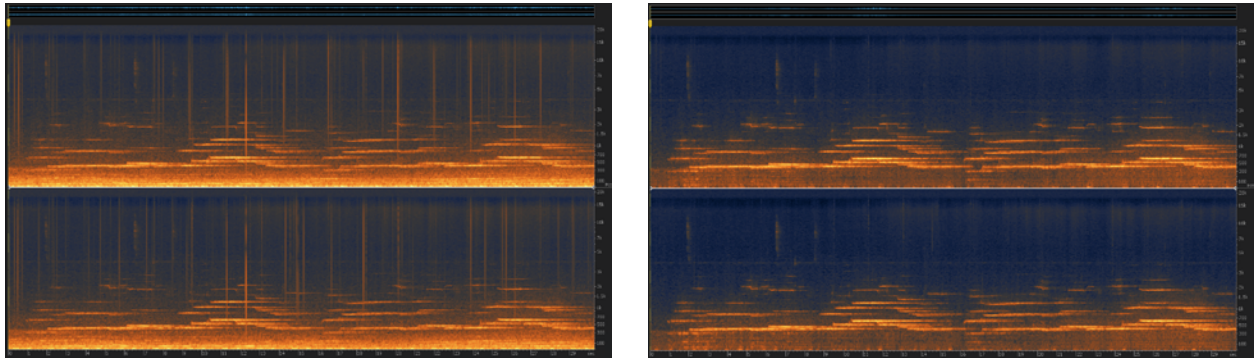


Comments:


This vinyl disc was transferred for playback as a CD. Fortunately, the only problems encountered were mostly light vinyl clicks and heavy room ambience—a result of the massive chapel at Cambridge University being the recording venue. Declick was employed using the M-band (random clicks) algorithm and one or two spots in manual mode. The rumbling room tone was reduced by the Spectral Denoiser.

Goals:


- Use the Declick module to remove the clicks and pops.

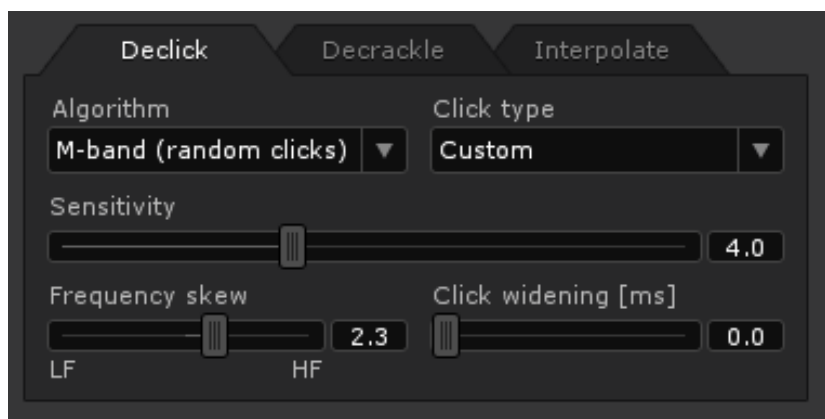


- Use the Deconstruct module to reduce the variable noise components while adding a slight lift to the tonal noise components.

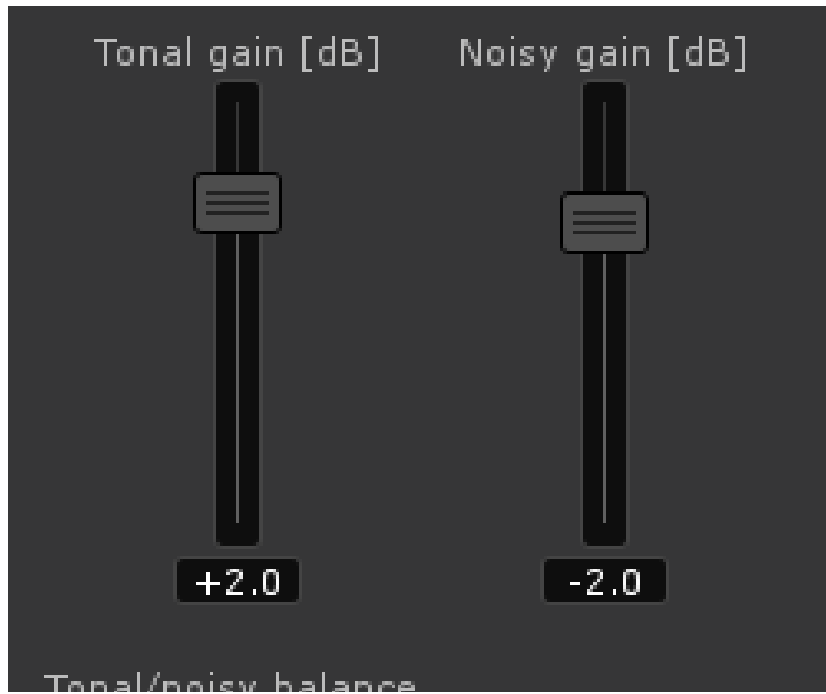

- Use the Spectral Denoiser to reduce background noise. Try to retain the musical character of the performance while removing as much of the offending noise as

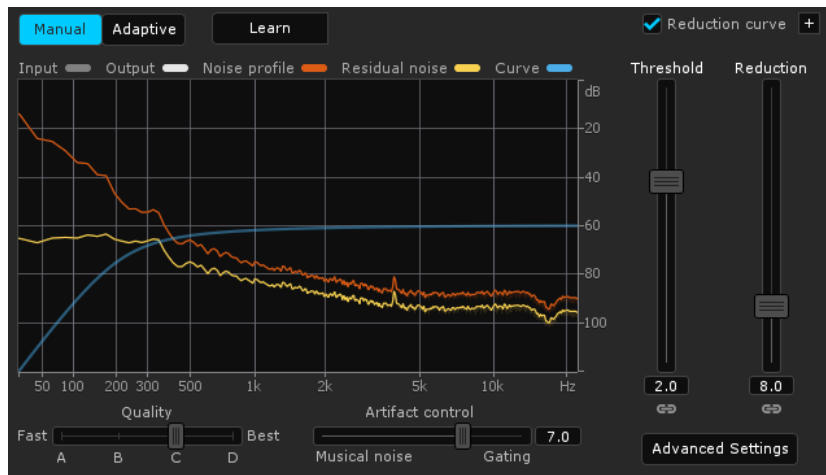


- Use Spectral Repair to reduce the low traffic hum that creeps in occasionally.

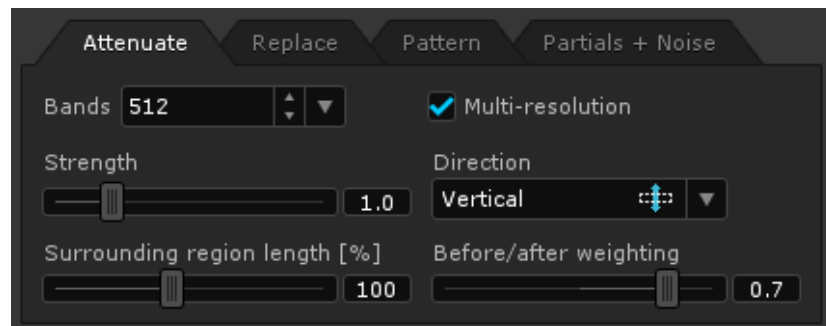

EXAMPLE 5: REMOVING CLIPPING FROM A PHONE INTERVIEW

DETAILS:

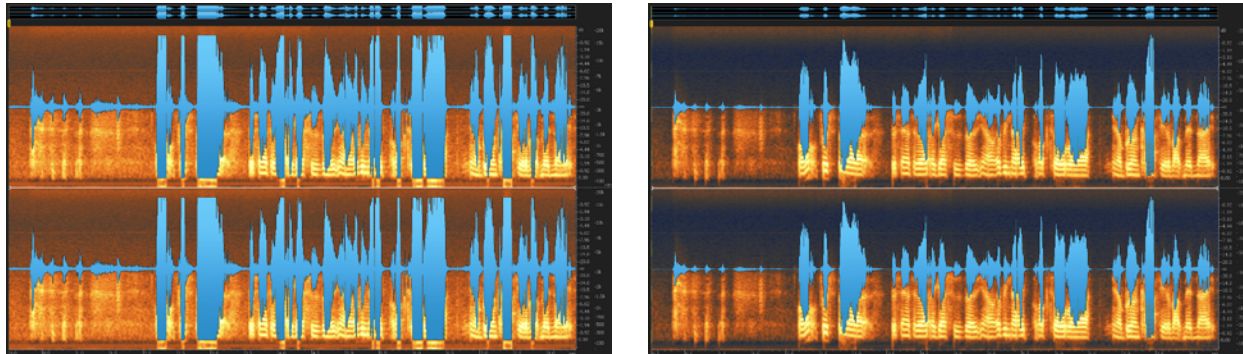


This phone interview, from an iZotope Podcast with producer Morgan Page, was recorded with a phone line breakout box and a USB audio interface.

Comments:

This is a classic example of input gain being set too high, resulting in some nasty clipping. In this example, the distorted sections can be clearly heard, but viewing them with the spectrogram display and waveform overlay highlights them in clearer detail.


Using the Declip module can remove the clipping entirely.

The suggest feature will help suggest the optimum position for the thresholds.

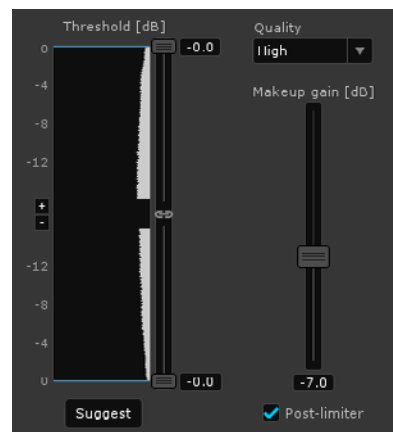

Goals:


- Use the Declip module to remove the clipping.
- Use the Dialogue Denoiser to reduce the noise.

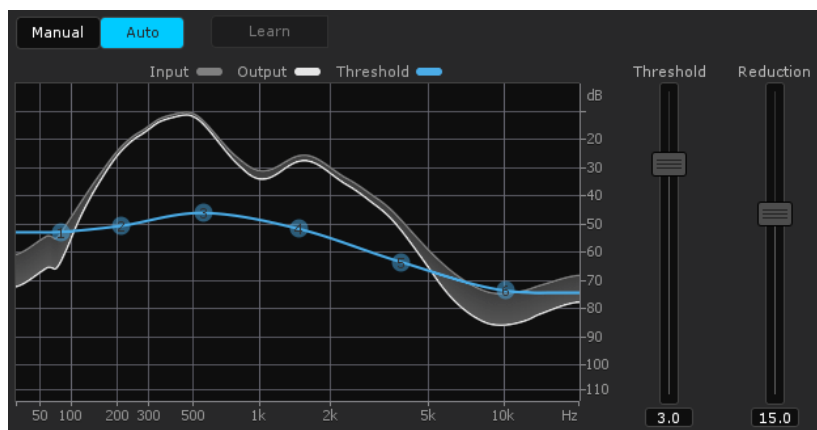

EXAMPLE 6: REMOVING GUITAR STRING SQUEAKS WITH SPECTRAL REPAIR

Details:

This recording by guitarist Jamie Robertson contains a few loud squeaks—the result of sliding one’s hand up and down the fretboard.

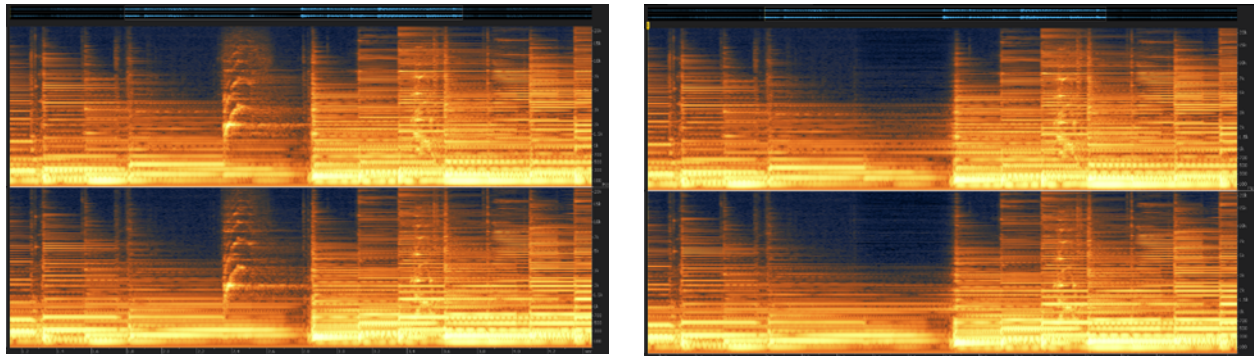

Comments:


These situations are always tricky. Should you remove all minor blemishes if your tools allow you to do so? Or should you leave these squeaks in the final product to keep the recording’s character intact? Sometimes removing only the most offending events is the best tactic, but we’ll let you decide how far to go!

Identify the squeaks using the Spectrogram Display. Draw a box around them using the Time/Frequency selection tool. Use Replace in Spectral Repair to select the squeaks and apply the process.

RX TIP • As these squeaks often occur right before a new chord or note is played, you may want to set the before/after weighting control all the way to the left. This will ensure that the repair is made solely using the sustained material from the earlier chord.

Goals:

- Use RX 4 Spectral Repair’s Replace to substitute squeaks for natural guitar sustain. Aim for a realistic result that does not sound unnatural.

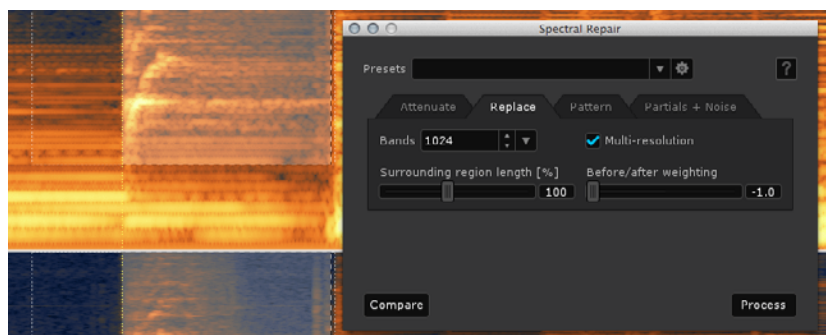

APPENDIX D: TIPS FROM THE PROS

We asked a few of our trusted friends and “RXperts” to contribute their advice with regards to audio repair, restoration, and editing.

BILL JACKSON

One of the tricks I use with RX is to carefully Denoise using the D (best) algorithm, then resample and Denoise using the C algorithm. This helps when there is broadband noise as well as a high frequency hiss that you want to reduce.

While mixing a film, I use RX Spectral Repair so frequently that I leave it open almost all of the time. It is a great tool for checking a clip to see what unwanted tones are present as well as low frequency bumps and rumbles, and then reduce or remove them by essentially painting them out.

Recently, I was asked to remove some unwanted electric dolly motor noise from an upcoming PBS show. They had previously tried to remove the noise with another software program, but the producer wasn't happy with the results. Using the stand-alone version of RX3, I was able to completely remove the motor noise with Spectral Repair, and since I had all the RX tools available at once, I easily removed some pops and clicks, distortion, and even used the RX EQ and RX gain on specific sections to balance the dialog tone and level throughout the scene. The producer was very happy with the results.

iZotope plug-ins are such a big part of my mixing that they are incorporated into my templates. I can't possibly achieve the quality of mix I'm delivering any other way.

STEVE LEVINE

Using vintage equipment on a session can be very creative, however many synthesizers are past their prime and are often plagued with hum, buzz and noise... that's where RX comes to the rescue, allowing you to incorporate these gems into your work whilst maintaining a modern technical level.

When denoising vintage synths, do it in two stages—first get rid of the hum and see how it sounds in the track, then tackle the hiss. Be gentle, as you want to keep as much “air” as possible whilst getting rid of any annoying hiss.

Sometimes on my radio show the interviewee has limited time available so any shortcomings in the recording can be easily fixed with RX in post (great for fixing bad digital clips or annoying background noise).

Another hidden gem in RX is the 24/16 bit conversion. This must be one of the best available—the BBC require 16 bit masters—so I use this.

Sometimes in our radio show we have to use 78 shellac discs. The declipping in RX can make unusable discs perfect for the program.

CHRIS SHAW

I find that Spectral Repair is really good at taking the edge off vocals that are recorded a bit too hot or when a singer's voice is a bit too shrill as he/she hits the top of their range. You can easily see and select the upper harmonics (usually in the 3-5 k range) and reduce them without having to resort to complex EQ automation.

Spectral Repair excels at handling difficult de-essing problems. Many times a singer will have a “whistle” embedded in the “ess” frequencies which can be hard to alleviate with a standard de-esser. By using Spectral Repair you can reduce the whistle whilst leaving the “ess” frequencies intact.

I've used the DeClip module to restore the attack and dynamics to drum tracks that were too hot on many archival recordings made with early 16 bit recorders. This immediately removes most of the harsh artifacts made with “vintage” digital gear.

You can use Spectral Repair to remove hi-hat bleed on snare and tom tracks. “Find Similar Events” in the edit menu greatly speeds up the process.

Nothing is better at removing hum from guitar and bass tracks better than RX Denoise. It has saved many unusable tracks for me.

MIKE THORNTON

Using two lightweight passes with the denoiser will give better results with fewer artifacts

Try using the denoiser and target the buzz frequencies with the envelope curve rather than using the Remove Hum module.

The Remove Hum module can be used to remove other problem sounds, not just hum and buzz. I used it to remove mobile phone text alerts.

If you are working on low frequency problems in Spectral Repair change the Frequency scale to Log or even Extended Log to display more detail at lower frequencies. If the problems are at a higher frequencies try setting the Frequency scale to Linear to display more detail at higher frequencies.

The Declick tool is not just a one trick pony for cleaning up vinyl recording. Its great for removing digital clicks caused by clocking problems, mouth clicks on voiceovers, and some kinds of distortion can be cleaned up with the Declick tool.

I have just taken a recording made in a bedroom with very little soft furnishings, and actually had a ping to it. Ran it through Dereverb and was able to get a result close to as if it had been recorded in a radio studio.

JASON GRAVES

Definitely audition all four algorithms before committing. I always default to the D (best, slowest)algorithm, even though it takes a little longer to preview in real time, but sometimes B or C actually sound better to my ears.

If you're involved in the original recording, always preroll at least three or four seconds of room tone. Then you'll have the perfect "handle" to train RX and zap the noise effortlessly.

If you're hearing too many artifacts reduce the Noise reduction slider by a few dB and increase the "Smoothing" by a few db. Sometimes even 2-4 dB sounds significantly more natural.

For extreme denoising cases, I've found two passes with half the dB in Noise reduction yields more transparent results.

This is hands-down THE best audio repair software out there. I use it on a daily basis—nothing sounds as natural and transparent as RX. Literally every virtual instrument I've recorded and built has been run through RX. You can hear it on all the strings and brass in the *Dead Space* franchise and the latest *Tomb Raider* game. Or should I say you CAN'T hear it!

ADAM AYAN

Knowing what to denoise and what to leave alone can be tricky in of itself. My general rule of thumb is if a noise or sound takes me out of the musical moment, or distracts me from enjoyment of the music then it must go!

BOB BRONOW

There's always the old chestnut:

The squeaky wheel does NOT get the grease. It gets RX, and is never heard again.



Copyright © 2014 iZotope, Inc. All rights reserved. iZotope®, RX®, Ozone®, Insight®, Nectar®, Alloy®, MBIT+™ and the iZotope logo are trademarks or registered trademarks of iZotope, Inc. All other trademarks contained herein are the property of their respective owners. Other products and company names mentioned herein may be trademarks of their respective companies. This material is provided for information purposes only; iZotope, Inc. assumes no liability related to its use. Use of the software is subject to a related license agreement.