


## Technical Specifications

Version 1.0 February 2006

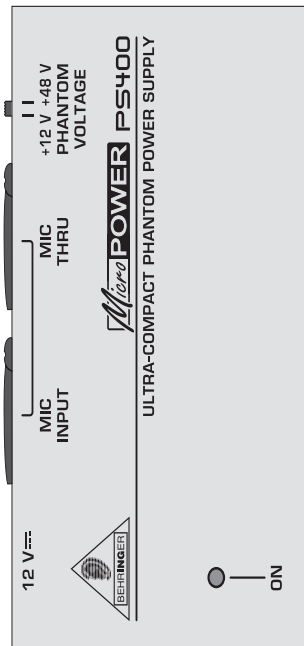

### FEATURES

- ▲ Universal phantom power supply for any condenser microphone
- ▲ Selectable +12 / +48 V power supply
- ▲ Ultra low-noise audio performance
- ▲ DC 12-Volt adapter included
- ▲ High-quality components and exceptionally rugged construction ensure long life
- ▲ Conceived and designed by BEHRINGER Germany

### SPECIFICATIONS

MIC INPUT and MIC THRU	
Type	XLR connector, balanced
PHANTOM POWER SUPPLY	
Voltage (switchable)	+12 V or +48 V
POWER SUPPLY	
Mains connector	external power supply, 12 V ~ /150 mA
Mains voltage	
USA/Canada	20 V~, 60 Hz
China/Korea	220 V~, 50 Hz
U.K./Australia	240 V~, 50 Hz
Europe	230 V~, 50 Hz
Japan	100 V~, 50 - 60 Hz
Power consumption	approx. 2 W
DIMENSIONS/WEIGHT	
Dimensions (H x D x W)	approx. 1 ¼" x 4" x 2 ¼" (approx. 32 mm x 103 mm x 58 mm)
Weight	approx. 0.40 lbs (0.180 kg)

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. The names of companies, institutions or publications pictured or mentioned and their respective logos are registered trademarks of their respective owners. Their use neither constitutes a claim of the trademarks by BEHRINGER® nor affiliation of the trademark owners with BEHRINGER®. BEHRINGER® accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colours and specification may vary slightly from product. Products are sold through our authorised dealers only. Distributors and dealers are not agents of BEHRINGER® and have absolutely no authority to bind BEHRINGER® by any express or implied undertaking or representation. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studioteknik GmbH. BEHRINGER® is a registered trademark.

ALL RIGHTS RESERVED. ©2006 BEHRINGER Spezielle Studioteknik GmbH,  
Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany.  
Tel. +49 2154 9206 0, Fax +49 2154 9206 4903

[www.behringer.com](http://www.behringer.com)

