


ULTRA ACOUSTIC MODELER AM400



Thank you for showing your confidence in us by purchasing the BEHRINGER ULTRA ACOUSTIC MODELER AM400. This high-quality modelling effects pedal is designed for all electric guitar players who want to add incredibly realistic acoustic guitar sounds to their playing. Thanks to its Real Sound Modeling (RSM) technology that combines state-of-the-art DSP technology with sophisticated algorithms to emulate real acoustic environments, you can create everything from standard, large-resonant, brilliant to bright Piezo pickup simulations.

1. CONTROLS

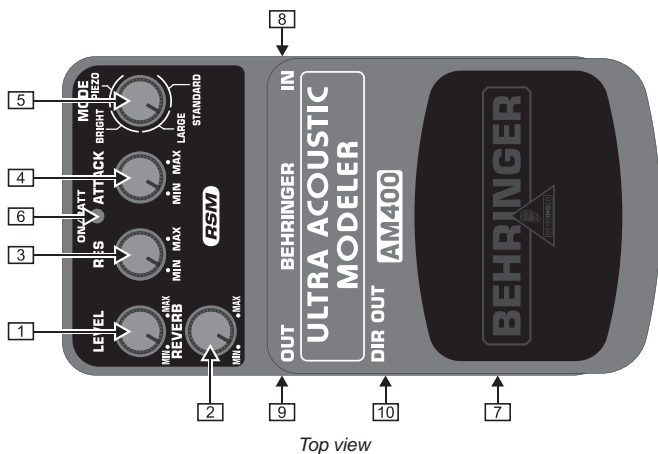

Top view

- 1** The **LEVEL** control adjusts the output level of the effect.
- 2** The **REVERB** control adjusts the amount of reverb effect that can be added to the signal.
- 3** The **RES(onance)** control adjusts the resonance of the simulated acoustic guitar body.
- 4** The **ATTACK** control adjusts the amount of attack and harmonic content of the high frequencies.
- 5** The **MODE** control lets you choose between four different acoustic modes:
STANDARD produces a typical acoustic guitar sound.
LARGE delivers a large, more resonant acoustic.
PIEZO simulates the distinct brightness of a classic piezo pickup.
BRIGHT gives you a brilliant and ultra-present sound, perfect for cutting through in a live environment.
- 6** The **ON/BATT-LED** illuminates when the effect is activated. It also serves as a battery level indicator.
- 7** Use the footswitch to activate/deactivate the effect.
- 8** Use this 1/4" TS **IN** connector to plug in the instrument cable.
- 9** This is the 1/4" TS **OUT** connector. When you only use this output, it carries the affected signal when the effect is active, and the direct signal (without effect) when the effect is inactive—both optimized for connecting to guitar amplifiers. When both the **OUT** and the **DIR OUT** (see **10**) connectors are used, the **OUT** connector carries the affected signal optimized for connecting to a mixer/PA when the effect is active. When the effect is inactive the **OUT** connector is muted.
- 10** This is the 1/4" TS **DIR OUT** connector, which is muted when the effect is active. When inactive it carries the direct signal (without effect) optimized for connecting to guitar amplifiers. It works the same way, when both the **DIR OUT** and the **OUT** (see **9**) connectors are used.

Use the **DC IN** connection to plug in a 9 V power supply (not included).

The **BATTERY COMPARTMENT** is located underneath the pedal cover. To install or replace the 9 V battery (not included), press the hinges with a ballpoint pen and remove the pedal cover. Be careful not to scratch the unit.

⚠ The **AM400** has no on/off switch. As soon as you insert the jack into the **IN** connector, the **AM400** begins running. When not using the **AM400**, remove the jack from the **IN** connector. This extends the life of the battery.

The **SERIAL NUMBER** is located on the underside.

⚠ In rare cases interferences of the normal function may appear by external influence (e.g. electrostatic discharge), as for example sound disturbances or malfunctions. If this occurs, please turn down the volume on subsequent amplifiers and disconnect the input connector briefly to restart the application.

2. WARRANTY

For our current warranty terms, please refer to our website at <http://www.behringer.com>.

3. SPECIFICATIONS

IN	Connector	1/4" TS
	Impedance	500 kΩ
OUT	Connector	1/4" TS
	Impedance	1 kΩ
DIR OUT	Connector	1/4" TS
	Impedance	1 kΩ
Power supply	9 V $\bar{=}$, 100 mA, regulated BEHRINGER PSU-SB	
	USA/Canada	120 V $\bar{~}$, 60 Hz
	Europe/U.K./Australia	230 V $\bar{~}$, 50 Hz
	China/Korea	220 V $\bar{~}$, 50/60 Hz
	Japan	100 V $\bar{~}$, 50/60 Hz
Power connector	2 mm DC jack, negative center	
Battery	9 V type 6LR61	
Power consumption	30 mA	
Dimensions (H x W x D)	approx. 54 mm (2 1/8") x 70 mm (2 3/4") x 123 mm (4 4/5")	
Weight	approx. 0.33 kg (0.73 lbs)	

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may therefore differ from those listed or shown.

4. SAFETY INSTRUCTIONS

Do not use near water, or install near heat sources. Use only authorized attachments/accessories. Do not service product yourself. Contact our qualified servicing personnel for servicing or repairs, **especially when power supply cord or plug is damaged.**

No utilizar cerca de agua o instalar cerca de fuentes de calor. Utilice sólo accesorios y aditamentos autorizados. No intenté reparar el producto usted mismo. Contacte a nuestro personal técnico cualificado para servicio y reparaciones, **especialmente cuando la fuente o el cable de alimentación estén dañados.**

Ne pas utiliser ni installer à proximité de liquides ou de sources de chaleur. Utiliser exclusivement les accessoires autorisés. Ne pas réaliser de maintenance soi-même sur le produit. Contacter notre personnel technique pour tout service ou réparation, **particulièrement si le cordon ou le connecteur du bloc d'alimentation est endommagé.**

Betriebe das Gerät nicht in der Nähe von Wasser oder Wärmequellen. Verwende bitte nur autorisiertes Zubehör. Führe bitte keinerlei Reparaturen am Gerät eigenständig durch. Reparaturen sind nur von qualifiziertem Fachpersonal vorzunehmen, **insbesondere bei Beschädigungen des Netzkabels oder Netzsteckers.**

Не эксплуатуйте прибор вблизи от источников воды и тепла. Применяйте только авторизованные дополнительные устройства. Никогда не ремонтируйте прибор самостоятельно. Ремонт может производить только квалифицированный специализированный персонал, **особенно при повреждениях сетевого провода или сетевой вилки.**

水分の近くや、ヒーターなど熱気のある場所では使用しないでください。正式に認可された付属品のみを使用してください。製品はご自分では決して修理せず、特に電源コードもしくはプラグが損傷した場合には、必ず製品サービスおよびリペアの資格を有した当社の担当員にご相談ください。

不要在靠近水源的地方使用，或在靠近热源的地方安装。只使用经过许可的附件 / 配件。不要自己进行产品维修，**尤其是当电源线或插座损坏的时候。** 请联系我们的专业服务人员有关产品维修事宜。

Die deutsche Anleitung ist erhältlich @ www.behringer.com
 Manuel francophone en téléchargement sur www.behringer.com
 Manual en español disponible en www.behringer.com
 Manuali italiani disponibili @ www.behringer.com
 Русскоязычное руководство @ www.behringer.com
 Polska instrukcja dostępna jest pod adresem @ www.behringer.com
 Nederlandse handleiding beschikbaar @ www.behringer.com
 Suomenkielinen käyttöohje saatavilla osoitteesta www.behringer.com
 Svensk manual finns tillgänglig på www.behringer.com
 Dansk vejledning findes på @ www.behringer.com
 Manual português disponível @ www.behringer.com
 Ελληνικό εγχειρίδιο υπάρχει διαθέσιμο στη διεύθυνση www.behringer.com
 日本語版マニュアル @ www.behringer.com
 使用说明书可在 www.behringer.com 下载

Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. BEHRINGER accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colours and specification may vary slightly from product. Products are sold through our authorised dealers only. Distributors and dealers are not agents of BEHRINGER and have absolutely no authority to bind BEHRINGER by any express or implied undertaking or representation. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER International GmbH. BEHRINGER, the BEHRINGER logo and JUST LISTEN are trademarks of BEHRINGER. ALL RIGHTS RESERVED. © 2007 BEHRINGER International GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Müncheheide II, Germany. Tel. +49 2154 9206 0, Fax +49 2154 9206 4903