

The EW152 is a complete wireless system consisting of an SK100 bodypack transmitter, an ME3 headworn super-cardioid microphone (with windscreen), and an EM100 rack-mountable true-diversity receiver. The EW152 is designed to give any performer both the freedom associated with wireless headworn microphones, and the confidence of rugged and robust Sennheiser RF construction.



SYSTEM FEATURES

- 1280 user selectable frequencies within a 32 MHz tuning range
- 4 preset memory locations, which can be reassigned any of the 1280 frequencies within its operational range
- Rugged bodypack transmitter
- Rack-mountable true diversity receiver
- High quality ME3 headworn super-cardioid microphone
- All metal construction on transmitter and receiver
- HDX® noise reduction for crystal clear audio
- Balanced and unbalanced audio output via ¼" TRS jack

TECHNICAL SPECIFICATIONS

SYSTEM

Switchable frequencies	1280
Frequency presets	4
AF Freq. response	60 Hz – 18 KHz
Modulation type	Wideband FM
Signal to noise ratio	> 110 dB (A)
THD (1 KHz)	< 0.9%
Peak deviation	± 48 kHz
Switching bandwidth	32 MHz
Frequency Ranges	A = 518 – 550 MHz

* = NOT IN USA

SK100 Transmitter

RF output power	30 mW
Max input voltage	Mic = 1.8 Vrms Line = 2.4 Vrms
Power supply	9 V alkaline
Operating time	** 6 to 8 hours
Dimensions	110 x 65 x 22 mm
Weight	255 g (approx)
** = NOTE	With high quality alkaline battery



EM100 Receiver

Receiver type	True Diversity
Antenna inputs	2 BNC jacks, 50 Ω
Audio outputs	¼" TRS
Max audio output level	+10 dBu (balanced) +4 dBu (Unbalanced)
Power supply	10.5 – 16 V DC
Dimensions	212 x 145 x 38 mm
Weight	1,100 g (approx)

B = 630 – 662 MHz	C = 740 – 772 MHz	D* = 790 – 822 MHz	E* = 838 – 870 MHz
-------------------	-------------------	--------------------	--------------------

ME3 Headworn

Transducer Principal	Electret Condenser
Pickup pattern	Super-Cardioid
Frequency response	45 Hz – 20 KHz
Sensitivity	1.6 mV/Pa
Sound pressure	150 dB SPL

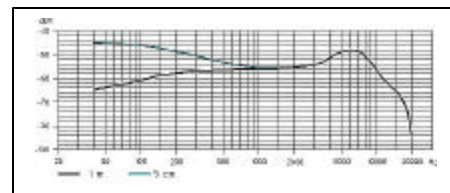

DELIVERY INCLUDES

SK100 Bodypack transmitter w/antenna / **ME3** Super-cardioid headworn microphone / **EM100** Rack-mountable true diversity receiver
2 telescoping antennas for EM100 / **Power supply** for EM100 / **Owners manual**

RECOMMENDED ACCESSORIES

GA1 Rack mount kit / **AM1** front-mount antenna kit / **CC1-EW** Foam lined carrying case / **ASP1/NT1** Antenna splitter for multi-channel set-ups