


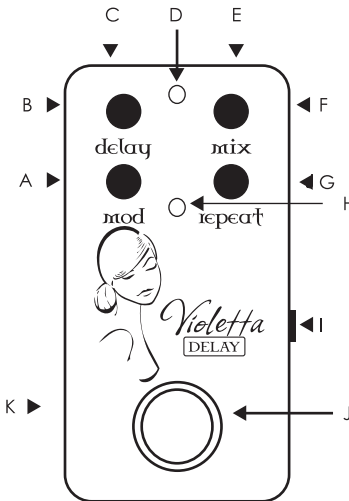


<p>Thank you for choosing Violetta - our glorious 1000m/s delay pedal.</p> <p>We are sure that by following the simple instructions outlined in the next few pages you will enjoy years of analog flavored delay beauty.</p> <p>Please read on to discover how to get the best from her.</p> <p>Be sure to peruse the section about pedal registration.</p> <p>Simply register online and automatically gain the extended warranty - plus you'll be in to win some truly excellent prizes.....</p> <p>Bliss!</p> <p>Best Regards,</p> <p>Ben Fulton</p> <p>(Owner and inventor)</p>	<p>Initial Charging.....</p> <p>Such a simple process.....</p> <p>Step One</p> <p>Locate a DC, 9 volt power adapter with the tip negative (Boss PSA, Voodoo Labs Pedal Power II, Godlyke Power All - pretty much any 9v guitar power supply), connect the 2.1mm plug to the power socket on the left hand side of Violetta.</p> <p>Step Two</p> <p>The LED closest to the top of the pedal should be glowing red.</p> <p>Leave her charging for 12 hours - the LED will change from red to green - indicating that charging is complete. Following this initial long charge she will only need 4-6 hours for future charging cycles.</p>	<p>The Controls.....</p> 	<p>A - Modulation Control - Adjust the depth of the modulation.</p> <p>B - Delay - this sets the delay time</p> <p>C - Output Socket.</p> <p>D - Charge indicator LED. Red = charging. Green = charged. Flashing = battery failure (replace battery immediately).</p> <p>E - Input Socket.</p> <p>F - Mix Control - Blend wet and dry.</p> <p>G - Repeat Control - this sets the number of delay repeats.</p> <p>H - Status LED Red = pedal engaged.</p>	<p>I - Exp Pedal out. Use the enclosed minijack adapter to run a Moog EP2 exp pedal to control the number of repeats.</p> <p>J - True bypass footswitch. Stamp on here to engage the pedal.</p> <p>K - Power input - 2.1mm 9 volt DC, tip negative.</p> <p>You can run Violetta in exactly the same manner you'd run any DC 9 volt pedal: Just plug and play.</p> <p>Disconnect the DC supply and the pedal automatically runs off the rechargeable battery inside the unit.</p>
---	---	--	--	---

<p>First time.....</p> <p>(After completing the initial 12 hour charge).</p> <p>Plug your guitar into the input socket (E on Diagram).</p> <p>Plug your amp into the output socket (C on Diagram).</p> <p>Set repeat at 12 o'clock position, delay at 11 o'clock position, mix at 2 o'clock position and modulation at 9 o'clock position.</p> <p>Stand back.</p> <p>Step on Footswitch.</p> <p>DELAYLARAMA!!!</p> <p>Dial up your own preferred magical delay setting!</p> <p>Note: Always pull the plug out of the input socket when not in use - this turns off the battery = weeks and weeks of battery life from one charge!</p>	<p>Caring for Violetta....</p> <p>Clean her with a soft cloth, allow no abrasives near her lovely chrome body.</p> <p>Over time her art work may wear off, be prepared for this: Ensure you have enough canned goods and fresh drinking water.</p> <p>The Lithium ion battery inside her should last around 2 years.</p> <p>To change the battery, simply remove the four screws on the back plate, unclip the old battery and plug in the new one. Replacement batteries are available from your favorite Red Witch store.</p> <p>Do not treat her rough - this includes immersing her in beverages, rewiring her, setting her on fire or using her as a weapon.</p> <p>She's tough, but everything lasts longer with a little love.</p>	<p>Warranty.....</p> <p>All electronics carry a lifetime warranty providing the owner purchases the pedal new and retains proof of purchase.</p> <p>All switches, jacks, potentiometers and other mechanical parts are warranted for one year after the date of purchase or for 4 years if the pedal is registered online (see last page of this manual). This is non transferable.</p> <p>All external fixtures, finish, lettering and knobs are not warranted. Damage or failure of product due to misuse will void the warranty.</p> <p>All repairs must be made by Red Witch authorized repair agents only.</p> <p>No user serviceable parts inside.</p> <p>Unauthorized repair/modification will render warranty void. In the unlikely event that she has a problem let us fix her. Please contact us at:</p> <p>warranty@redwitchanalogpedals.com</p>	<p>Register her.....</p> <p>Simply go online and register your pedal to gain an instant 4 year extended warranty.</p> <p>www.redwitchanalogpedals.com</p> <p>By registering you gain access to our members only Red Witch forum and the opportunity to win free pedals & other treats! That sounds rather good? Yes!!</p>  <p>Be sure to "like" us on Facebook - more opportunities to win free pedals, stickers, t-shirts and other delightful goodies.</p> <p>http://www.facebook.com/RedWitchPedals</p>  <p>We're on Twitter:</p> <p>http://twitter.com/RedWitchPedals</p>	 <p>INSTRUCTIONS</p> <p>Original Chrome Series</p>
---	--	--	---	---