

User Manual of Product 1:

Rode Podcaster USB Dynamic Microphone

Podcaster

Broadcast Quality USB Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664



Features


- Broadcast Sound Quality
- 28mm dynamic capsule
- 18-bit resolution, 8-48kHz sampling
- Windows and Mac compatible
- Powered by USB bus
- Internal capsule shock mounting
- 3.5mm stereo headphone output with volume control built-in to body
- Ideal for voice recognition software
- Designed and manufactured in Australia
- Free 10 year extended warranty when you register online at www.rodemic.com/warranty

Specifications


Acoustic Principle	Dynamic
Directional Pattern	Cardioid
Frequency Range	40Hz ~ 14,000Hz
Sensitivity	-30dB $\pm$ 2dB re 1V/Pa @ 1kHz
Active Electronics	Analogue signal conditioning + A/D and USB interface
Analogue Output I/F:	Headphone audio output. Drives 150mW into 32 Ω Output level adjustment.
Sensitivity	-51dBu $\pm$ 3dB re 1V/Pa @ 1kHz
Resolution:	18bits
Maximum SPL	115dB (@ 1kHz, 1% THD into 1k Ω load)
Signal/Noise	78dB SPL (A - weighted per IEC651)
Power Req.	Supplied by USB port
Dimensions	Length - 215mm Diameter - 56mm
Output Connection	USB Digital Interface
Net Weight	610g (21.5oz)

Incl. Accessories


- RM2 stand mount
- 3m (1") USB cable

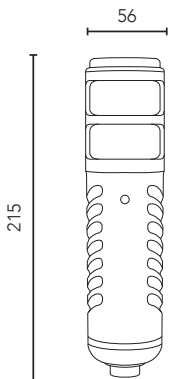

Polar Pattern



Frequency Response

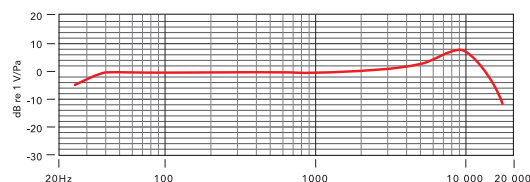

RØDE
MICROPHONES